





REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

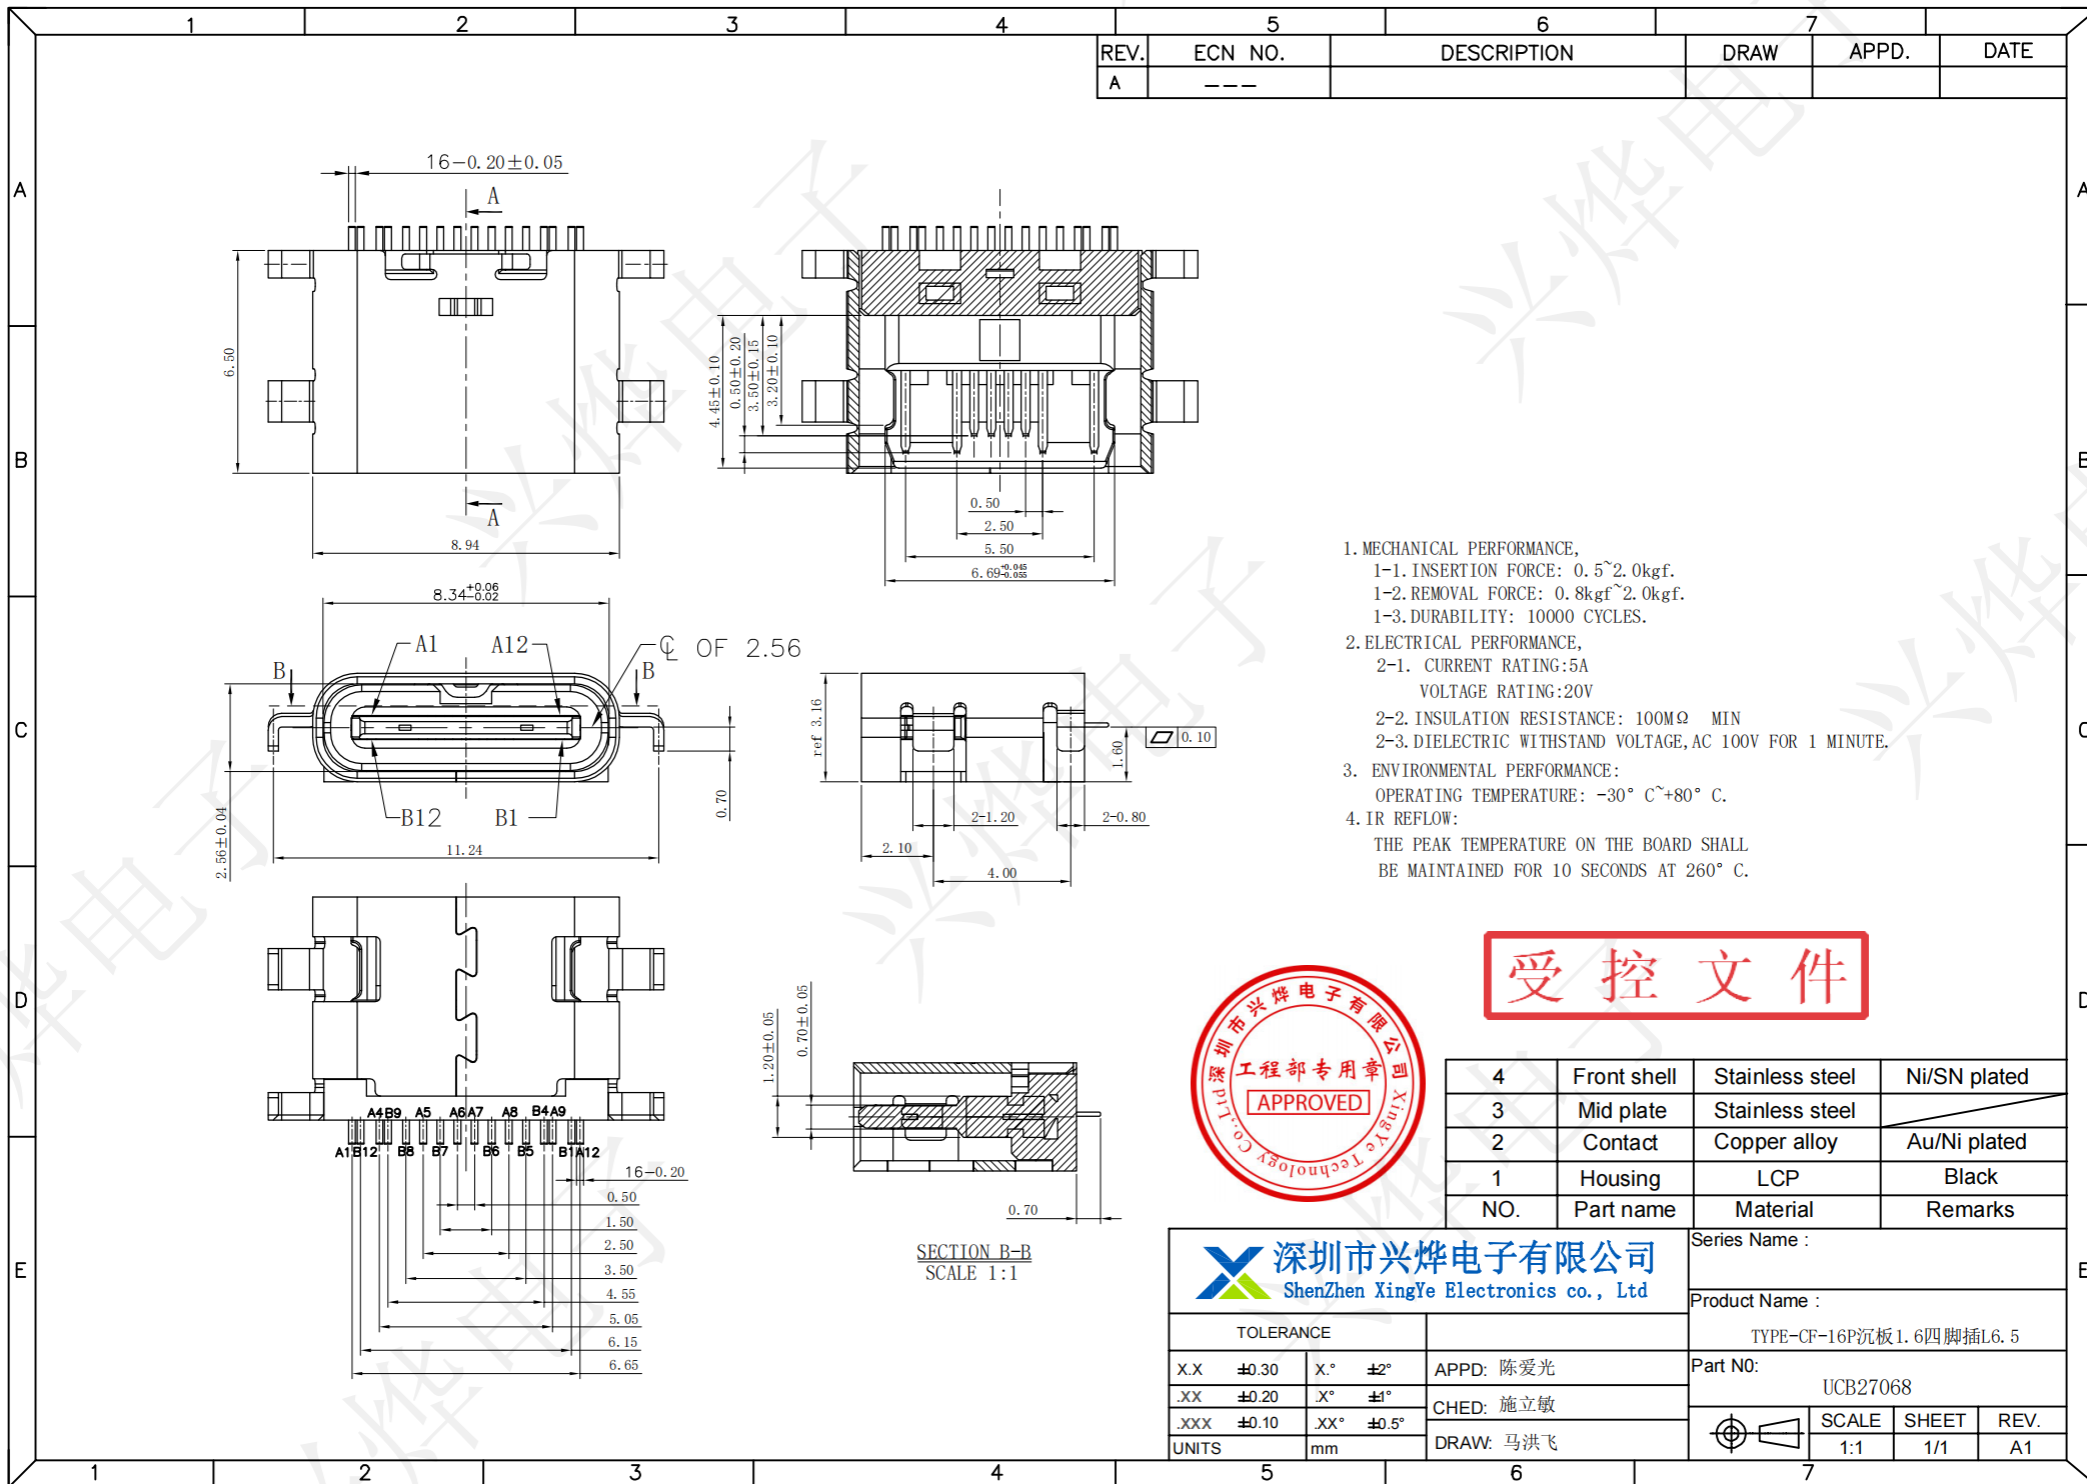

受控文件

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

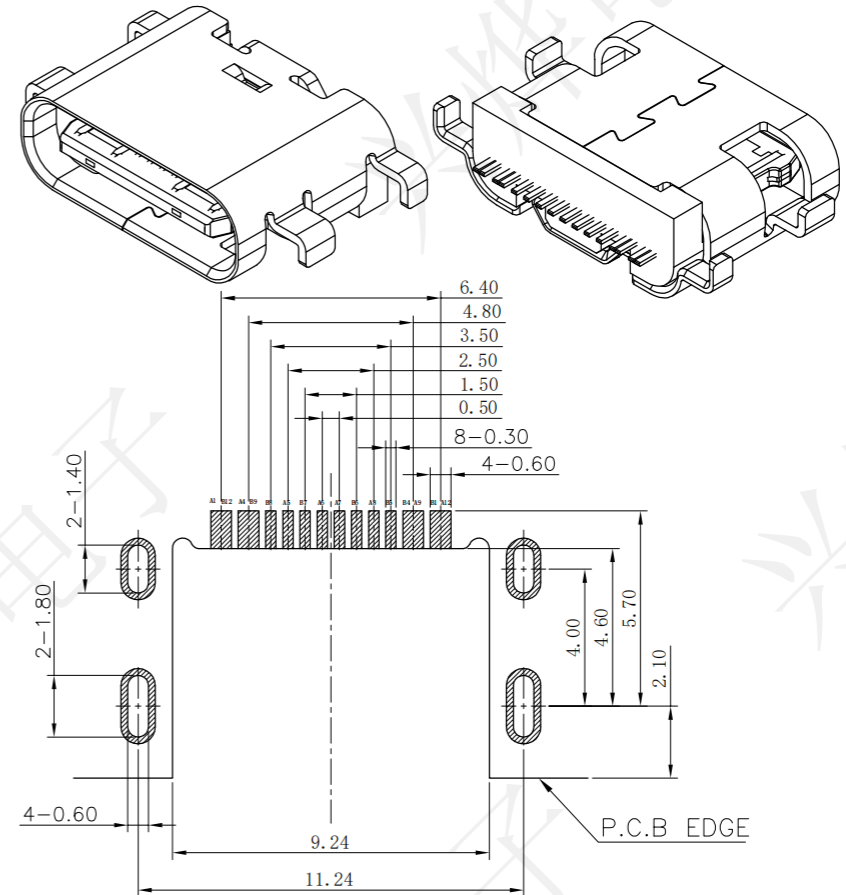

RECOMMEND P. C. B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

 深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X	± 0.30	X. $^{\circ}$ $\pm 2^{\circ}$
.XX	± 0.20	X. $^{\circ}$ $\pm 1^{\circ}$
.XXX	± 0.10	XX. $^{\circ}$ $\pm 0.5^{\circ}$
UNITS	mm	

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞

Series Name :

Product Name :

TYPE-CF-16P沉板1.6四脚插L6.5

Part NO:

UCB27068



SCALE	SHEET	REV.
1:1	1/1	A1

REV. A **ECN NO.** --- **DESCRIPTION** **DRAW** **APPD.** **DATE**

A **B** **C** **D** **E**

出料方向
PULL OUT DIRETEON

Peeling angle
165°~180°
400Min

Ø13.5

105.0
330
24.0

W=24.00
F=11.50
E=1.75
P=12.00
P0=4.00
P2=2.00
k=4.05
T=0.40

NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRETEON

出料方向
PULL OUT DIRETEON

后空5PCS 1200PCS產品 前空5PCS

2. 上帶 剝力為：0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

APPROVED

XingYe Technology Co., Ltd. 深圳市兴烨电子有限公司

TAPE & REEL 10 PCS
1 REEL = 1200 PCS

BOX
DIMENSIONS:
33.5X33.5X30.5
1 CARTON = 10 REELS = 12000 PCS

受控文件

包裝明細表 (The detail of the packing) Carton

產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxes/Carton	Pcs/Box	N. W./Pcs	N. W./Box	G. W./Box
	1200	10	12000	----	----	----

深州市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE

X.X	±0.30	X.°	±2°
.XX	±0.20	X.°	±1°
.XXX	±0.10	.XX°	±0.5°
UNITS	mm		


APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞

Series Name :
Product Name : TYPE-CF-16P沉板1.6四脚插L6.5
Part NO: UCB27068

SCALE 1:1 SHEET 1/1 REV. A1

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTION

出料方向
PULL OUT DIRECTEON

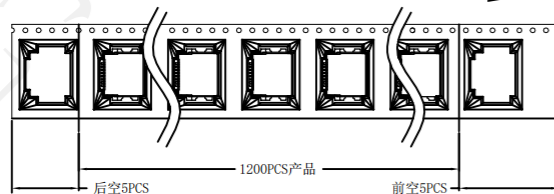

2. 上帶 剝力力為：0.1~1.3N(10.2gf~130gf)

PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意：

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT :


卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION




TAPE & REEL 10 PCS

1 REEL
= 1200 PCS



BOX

DIMENSIONS:
33.5X33.5X30.5


$$\begin{array}{l} 1 \text{ CARTON} \\ \hline = 10 \text{ REELS} \\ = 12000 \text{ PCS} \end{array}$$

受控文件



Series Name :

Product Name :

TYPE-CF-16P沉板1.6四脚插L6.5

Part N0:	
----------	--

UCB27068



SCALE
1:1

SHEET
1/1

REV.
A1

包裝明細表	(The detail of the packing) Carton
-------	------------------------------------

產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxes/Carton	Pcs/Box	N. W./Pcs	N. W./Box	G. W./Box
	1200	10	12000	----	----	----

TOLERANCE		
X.X ± 0.30	X.° $\pm 2^\circ$	APPD: 陈爱光
.XX ± 0.20	X° $\pm 1^\circ$	CHED: 施立敏
.XXX ± 0.10	.XX° $\pm 0.5^\circ$	DRAW: 马洪飞
UNITS	mm	

Part N0:	UCB27068		
	SCALE	SHEET	REV.
	1:1	1/1	A1