

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

A

B

C

D

E



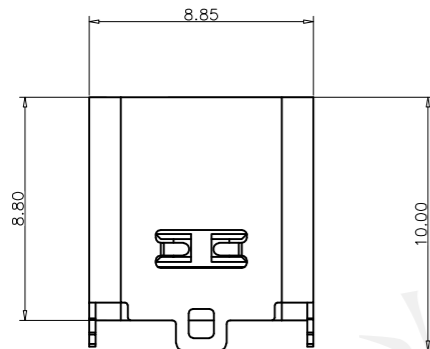
A

B

C

D

E



备注 (NOTE):

1材质:

1.1胶芯: LCP UL94 V-0

1.2端子: C2680, T=0.2mm; 镍底, 镀金

1.3外壳: 不锈钢201-H 表面镀镍

2. 电气特性:

2.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

2.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.

2.3. 额定电压: 5V.

2.4. 耐电压: 100VAC.

2.5. 绝缘电阻: 至少100兆欧.

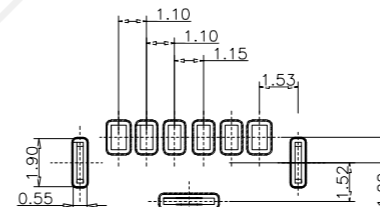
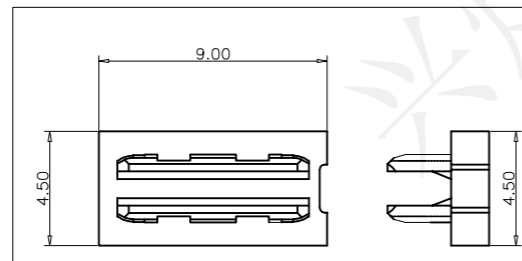

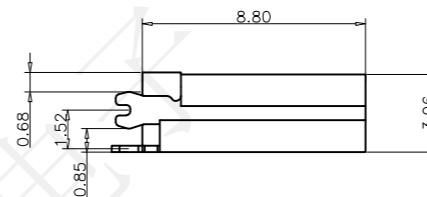


3. 机械性能:

3.1. 插入力: 0.5-2.0Kg

3.2. 拔出力: 0.6-2.04Kg

3.3. 插拔次数: 5000次.

4. 工作环境: -20℃ to +85℃.

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY, NI30u" Min PLATED
2	CONTACT	6	C2680, TIN80u"/Au1u"/Ni30u" PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK



受控文件

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X	±0.30	X.° ±2°
.XX	±0.20	X.° ±1°
.XXX	±0.10	XX.° ±0.5°
UNITS	mm	

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞

Series Name :

Product Name :

TYPE-CF-6P立贴三脚插H8.8加盖编带

Part NO:

UCZ27432



SCALE	SHEET	REV.
1:1	1/1	A1