
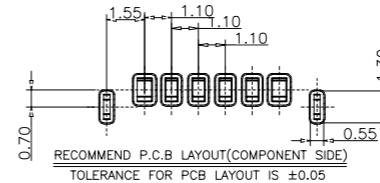


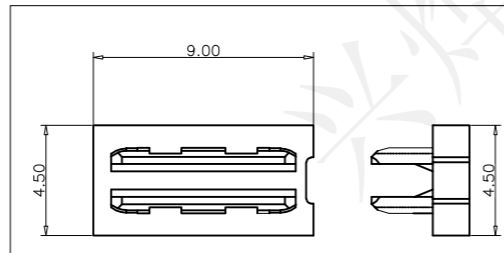





REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

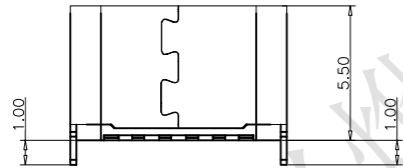

备注(NOTE):

1材质:

1.1胶芯: LCP UL94 V-0

1.2端子: C2680, T=0.2mm; 镍底, 镀金

1.3外壳: 不锈钢201-H 表面镀镍

2. 电气特性:

2.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

2.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.

2.3. 额定电压: 5V.

2.4. 耐电压: 100VAC.

2.5. 绝缘电阻: 至少100兆欧 .

3. 机械性能:

3.1. 插入力: 0.5-2.0Kg

3.2. 拔出力: 0.6-2.04Kg

3.3. 插拔次数: 5000次.

4. 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1	B5	CC2
A9	VBUS		
A12	GND		

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY,Ni30u"Min PLATED
2	CONTACT	6	C2680,TIN80u"/Au1u"/Ni30u" PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK



受控文件

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X	±0.30	X.° ±2°
.XX	±0.20	X° ±1°
.XXX	±0.10	XX° ±0.5°
UNITS	mm	

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞

Series Name :

Product Name :

TYPE-CF-6P 立贴两脚插H5.5舌头外露

Part NO:

UCT27452



SCALE
1:1

SHEET
1/1

REV.
A1