REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

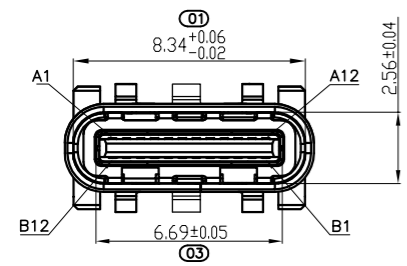

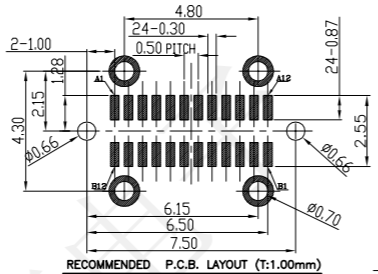

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

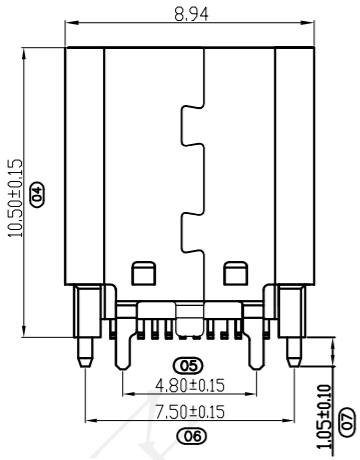

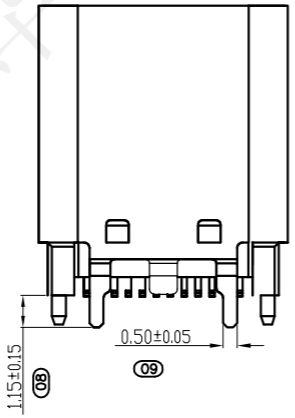

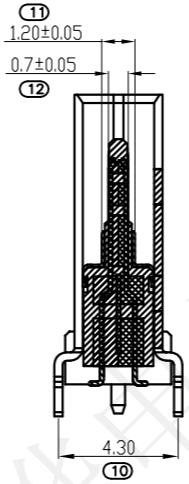

PIN NUMBER	SIGNAL NAME	PIN NUMBEP	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

1. MECHANICAL PERFORMANCE,
   1-1. INSERTION FORCE: 5-20N
   1-2. REMOVAL FORCE: 8-20N
   1-3. DURABILITY: 10000 CYCLES.
2. ELECTRICAL PERFORMANCE,
   2-1. CURRENT RATING: 5A
   VOLTAGE RATING: 20V
   2-2. INSULATION RESISTANCE: 100MΩ MIN
   2-3. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
3. ENVIRONMENTAL PERFORMANCE:
   OPERATING TEMPERATURE: -30° C~+85° C.
4. IR REFLOW:
   THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C.

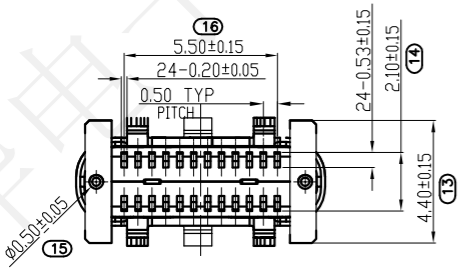

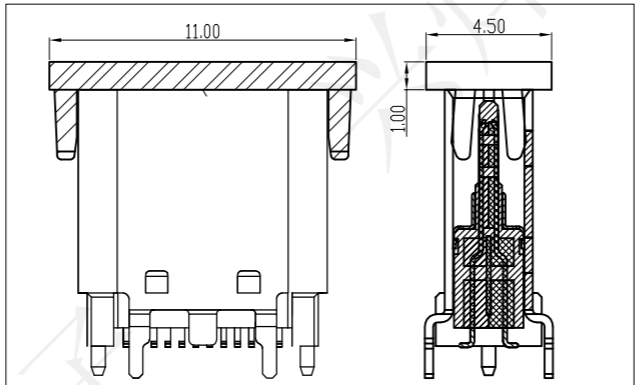

装吸取盖示意图

NO.	Part name	Material	Remarks
4	Front shell	Stainless steel	Ni/SN plated
3	Mid plate	Stainless steel	
2	Contact	高导铜C7025	Au/Ni plated
1	Rubber core	LCP+30%G.F	UL94V-0

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :

Product Name : TYPE-CF-24P立贴L10.5带小脚

Part N0: UCY27109

TOLERANCE			
X.X	±0.30	X.°	±2°
.XX	±0.20	.X°	±1°
.XXX	±0.10	.XX°	±0.5°
UNITS		mm	

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞

SCALE	SHEET	REV.
1:1	1/1	A1

深圳市兴烨电子有限公司 工程部专用章 APPROVED XingYe Technology Co., Ltd

受 控 文 件