


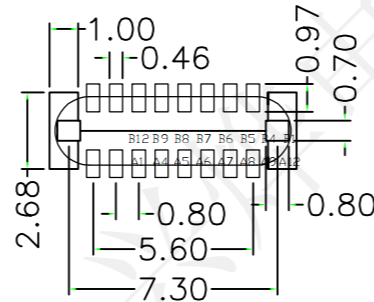


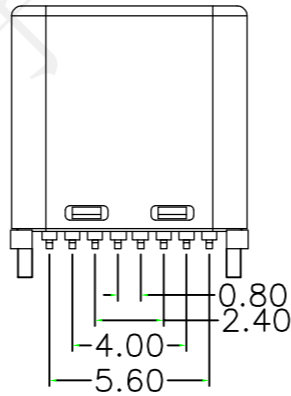


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

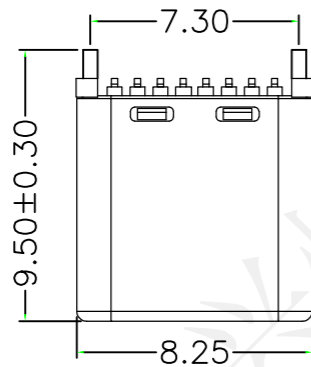

备注:

1. 材质:

1.1 胶芯: LCP+30%G.F UL94V-0

1.2 端子: C2680, T=0.20mm; 镀半金锡

1.3 外壳: 不锈钢, T=0.15mm; 表面镀镍

1.4 卡钩: 不锈钢, T=0.40mm; 表面镀锡

2. 主要特性:

2.1 额定电流: 3A

2.2 接触阻抗: 40mΩ MAX

2.3 绝缘阻抗: 100MΩ MIN 250V DC

2.4 耐压测试: 100V AC

2.5 沾锡性: 温度245±5℃

2.6 整体插入力: 2.0kgf MAX

整体拔出力: 0.8kgf MIN

耐久后拔出力: 0.6kgf MIN

2.7 使用寿命: 10000次

2.8 工作温度: -25℃~+80℃

受控文件

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X	±0.30	X.° ±2°
.XX	±0.20	.X.° ±1°
.XXX	±0.10	.XX.° ±0.5°
UNITS	mm	

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞

Series Name :

Product Name :

TYPE-CF-16P立贴拉伸款H8.5

Part NO:

UCZ27499



SCALE
1:1

SHEET
1/1

REV.
A1