


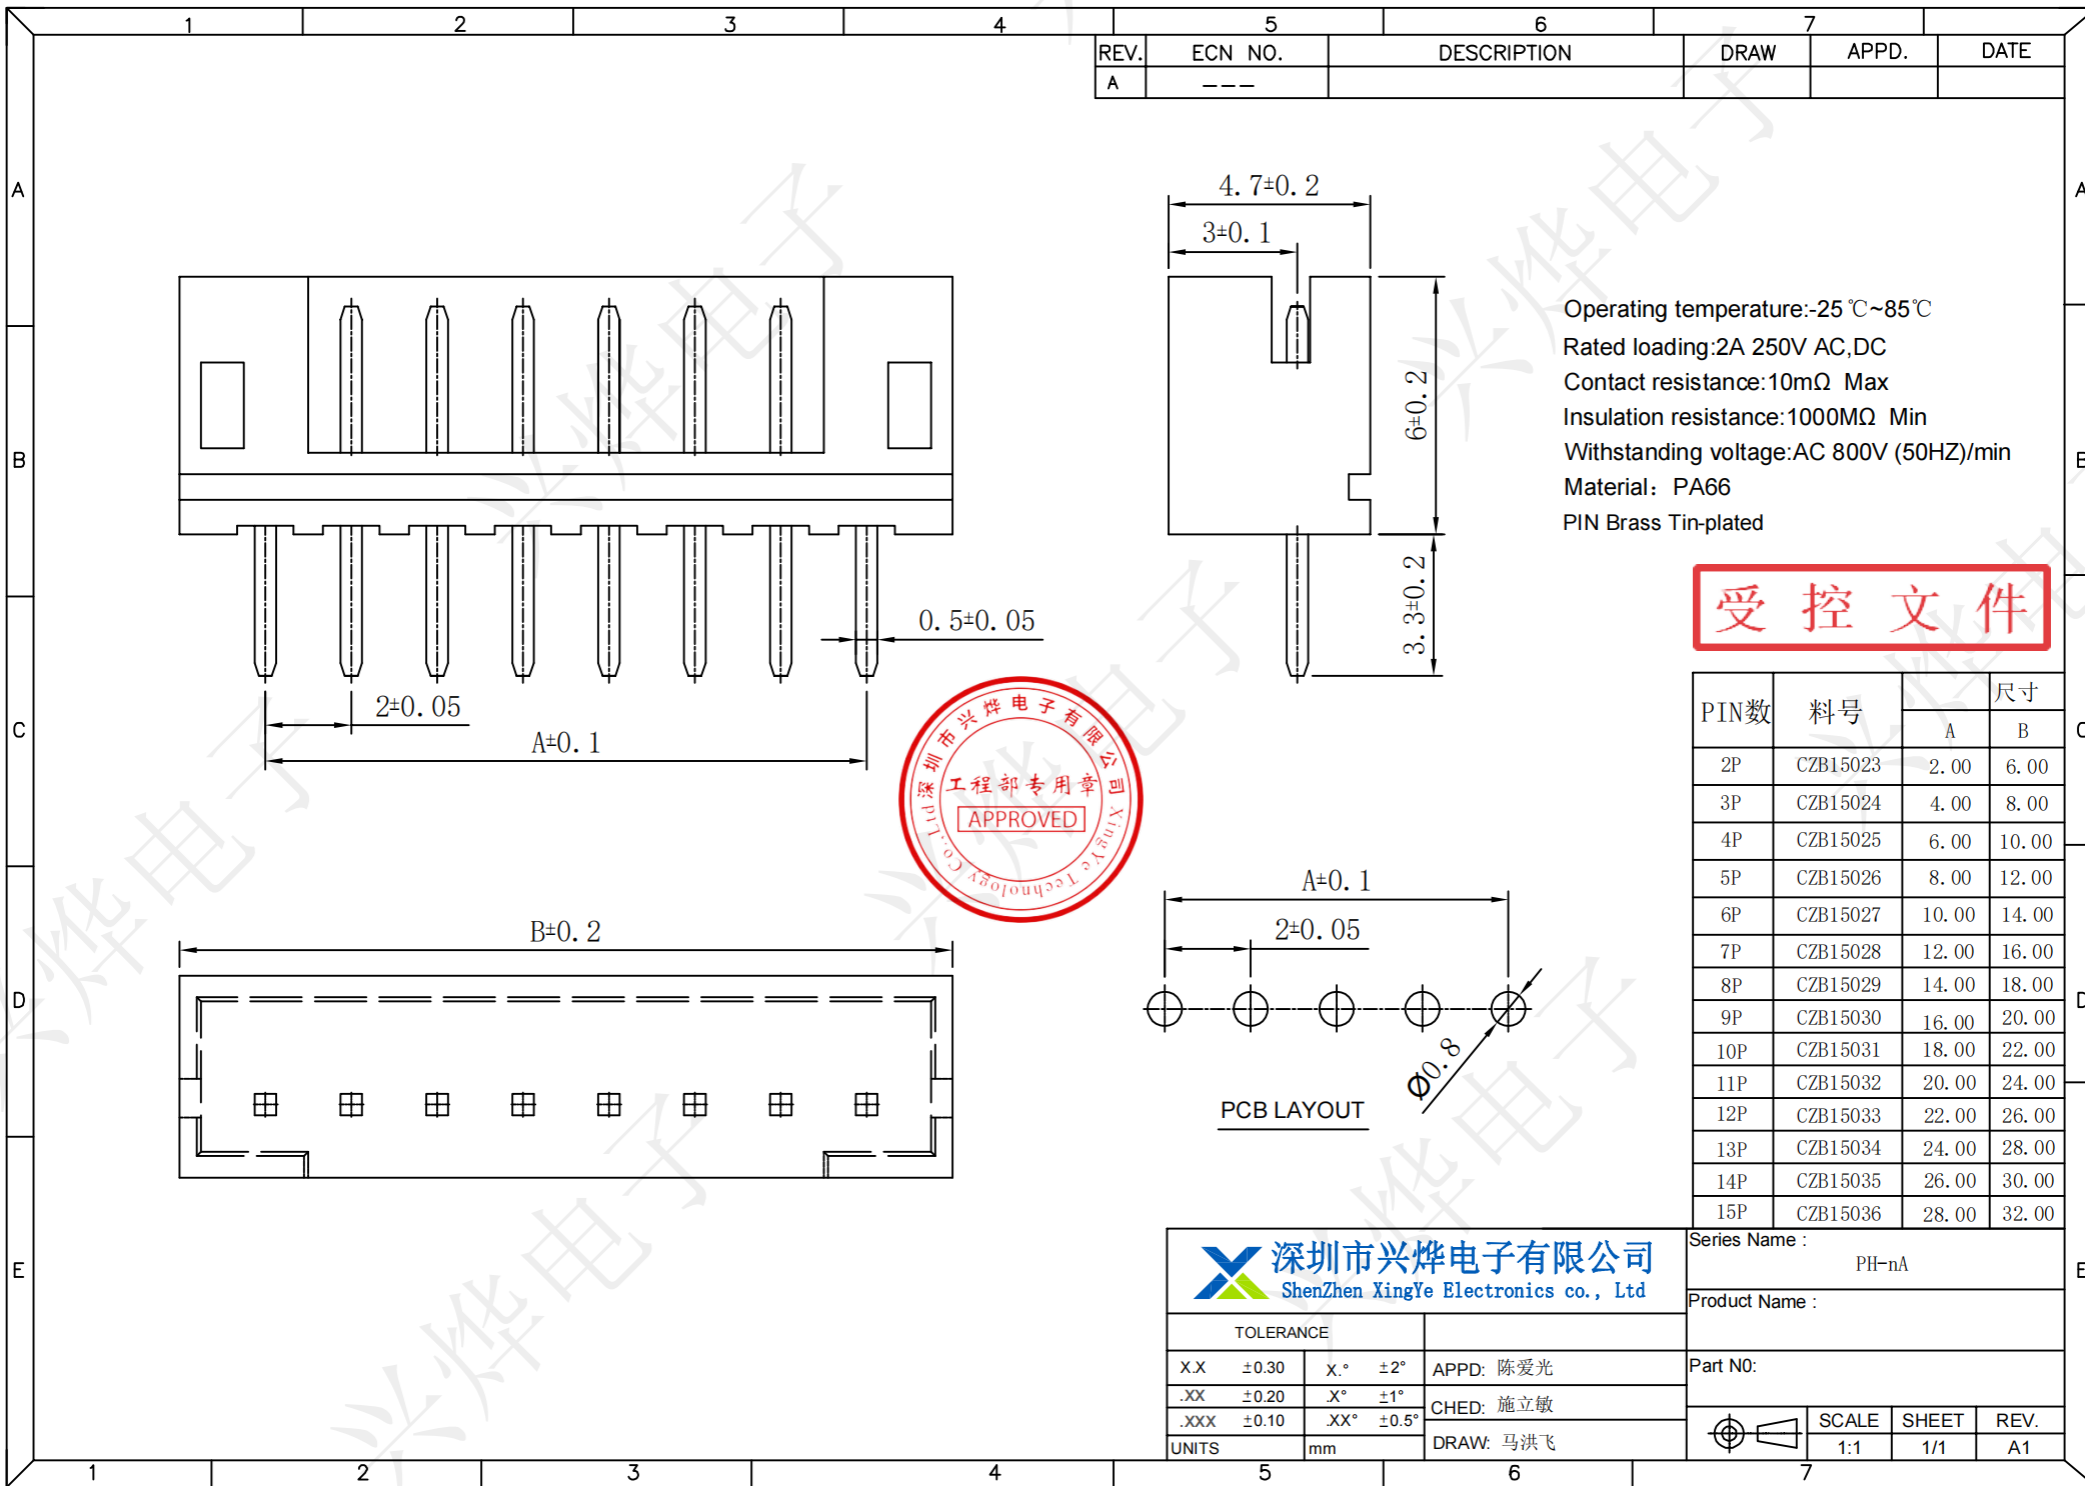

Operating temperature:-25℃~85℃
Rated loading:2A 250V AC,DC
Contact resistance:10mΩ Max
Insulation resistance:1000MΩ Min
Withstanding voltage:AC 800V (50HZ)/min
Material: PA66
PIN Brass Tin-plated

受控文件

PIN数	料号	尺寸	
		A	B
2P	CZB15023	2.00	6.00
3P	CZB15024	4.00	8.00
4P	CZB15025	6.00	10.00
5P	CZB15026	8.00	12.00
6P	CZB15027	10.00	14.00
7P	CZB15028	12.00	16.00
8P	CZB15029	14.00	18.00
9P	CZB15030	16.00	20.00
10P	CZB15031	18.00	22.00
11P	CZB15032	20.00	24.00
12P	CZB15033	22.00	26.00
13P	CZB15034	24.00	28.00
14P	CZB15035	26.00	30.00
15P	CZB15036	28.00	32.00

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd			
TOLERANCE			
X.X	±0.30	X.°	±2°
.XX	±0.20	.X°	±1°
.XXX	±0.10	.XX°	±0.5°
UNITS	mm		

Series Name : PH-nA			
Product Name :			
Part NO:			
	SCALE 1:1	SHEET 1/1	REV. A1

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞