



ROHS

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

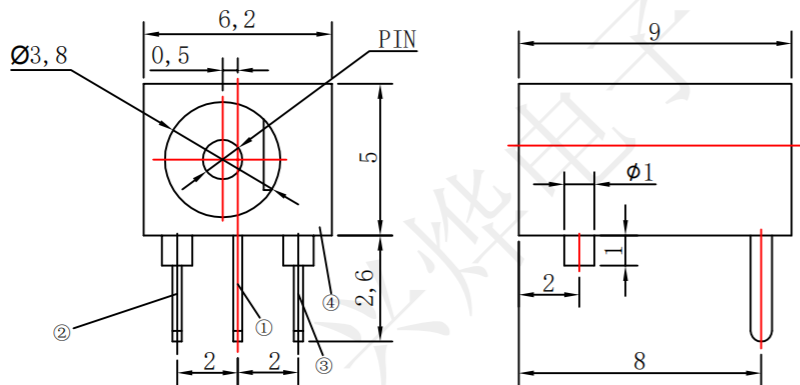

SPECIFICATION:

Operating temperature: -40℃~55℃

Rated loading: DC 30V 1.6A

Contact resistance: 30mΩ Max

Insulation resistance: 100MΩ Min



Withstanding voltage: AC 500V (50Hz) /min

Insertion force: 3-20N

Pullout force: 3-20N

Life: 5000 CYCLES

PIN	φ1	φ1.3
-----	----	------

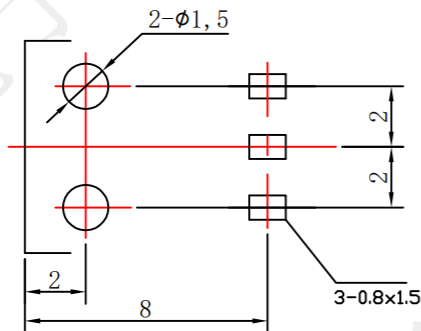线路板开孔尺寸
P.C.B LAYOUT按点示意图
SCHEMATIC

受控文件

DCH14002	DC-003 1.0针无后盖全铜REACH
DCH14003	DC-003 1.3针无后盖全铜REACH

④	基脚	1PCS	PA66(黑色)	
③	静触片	1PCS	磷铜	电镀: 银
②	动触片	1PCS	铍青铜	电镀: 银
①	插针脚	1PCS	黄铜	电镀: 银
序列号	名称	数量	材料	备注

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., LtdSeries Name :
DC-003无后盖Product Description :
DC-003 1.3针无后盖全铜REACHPart NO:
DCH14003

TOLERANCE		
X.X	±0.30	X.* ± 2*
.XX	±0.20	.X.* ± 1*
.XXX	±0.10	.XX.* ±0.5*
UNITS	mm	

APPD: 姚人凤

CHED: 施立敏

DRAW: 马洪飞



SCALE	SHEET	REV.
1:1	1/1	A1