


1	2	3	4	5	6	7
PEV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE	
A	---					



受控文件

- Material:**
 - Contaeis: Phosphore Bronze
 - insulater: PBT+30% G. F. UL 94V-0
 - Shell: SPCC
- Mechanical:**
 - Mating: 35N max.
 - Withdrowa Force: 10N min.
 - Darability: 1500 cycles min.
- Elecetical:**
 - Current-max (amps) 1.5A
 - Voitage-max (volts) 30V
 - Withstanding Voltage 750V AC
 - Contact Resistance (ohms) 30 milliohms max insulation
 - Resistance (ohms) 1000 Megogms min.
- Plating:**
 - Contacts: Gold And Tin Over Nickel Ploled
 - Shell: Nickel over all plating.
- Environmental:**
 - temperature Range: -55 to 85 .

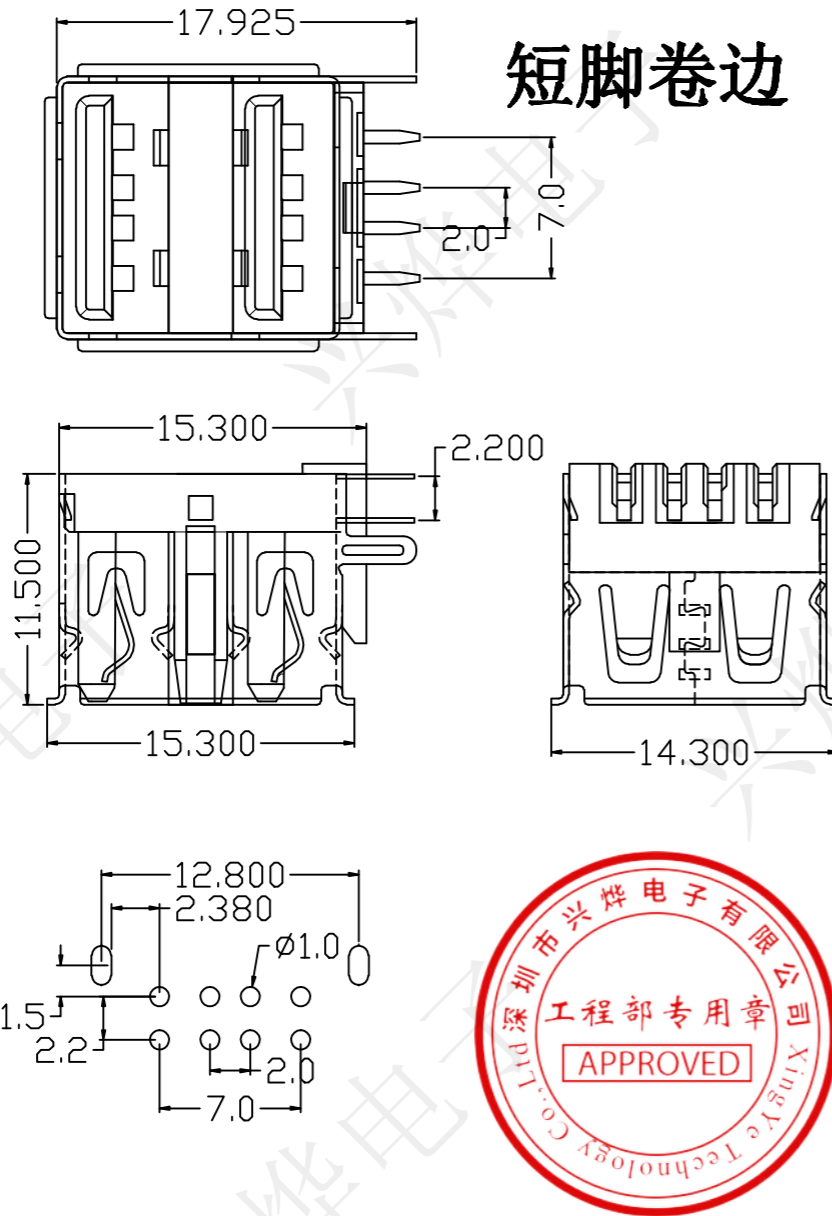

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd				Series Name :			
TOLERANCE				Product Pescription : AF90度双层短体弯脚直插白胶卷边L11.5			
X.X	±0.30	X.°	±2°	Part NO: USBZ48050			
.XX	±0.20	.X°	±1°				
.XXX	±0.10	.XX°	±0.5°				
UNITS	mm	DRAW: 马洪飞		SCALE	SHEET	REV.	
				1:1	1/1	A1	