
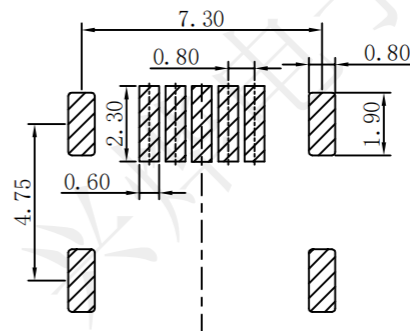
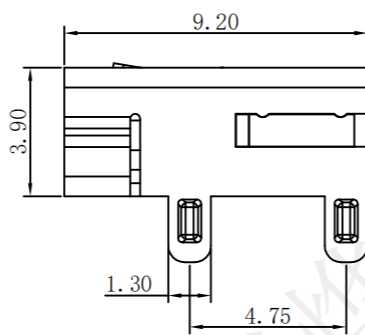
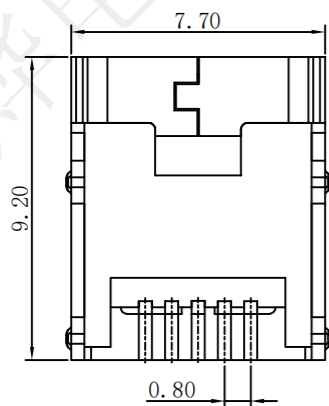
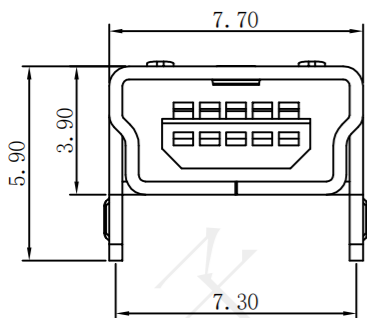




PCB LAYOUT

受控文件

Specification:

Current rating:DC 1.5A 30V

Dielectric withstanding voltage: 500 V(ac) for 1 min.

Contact resistance: 30 mΩ Max.

Insulation resistance: 100 MΩ Min.

Total mating force: 3.57 Kg Max.

Total unmating force: 1.0 Kg Min.

Temperature range: -30°C~80°C

3	Shell	1PCS	copper alloy	t=0.4mm
2	Contacts	5PCS	copper alloy	t=0.25mm
1	Housing	1PCS	LCP	black/UL94v-0
No.	Pare Name	Number	Material	Remarks



Series Name :

Product Name :

MINI-5P四脚插后贴铜编带

Part NO:

USBG28022



SCALE
1:1

SHEET
1/1

REV.
A1

TOLERANCE		
X.X	±0.30	X.° ±2°
.XX	±0.20	.X° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	
APPD: 陈爱光		
CHED: 施立敏		
DRAW: 马洪飞		