




REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				




P.C.B LAYOUT TOP VIEW



受控文件

SPECIFICATION:
Operating temperature:-40℃~55℃
Rated loading:DC 30V 0.2A
Contact resistance:30mΩ Max
Insulation resistance:100MΩ Min
Withstanding voltage:AC 250V (50Hz) /min
Insertion force:3-15N
Pullout force:3-15N
Life: 5000 CYCLES

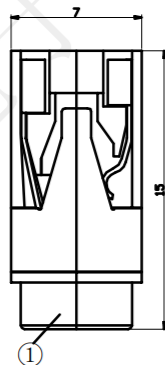

CIRCUIT DIAGRAM



5	5#触片	1	磷铜	t=0.25	镀银
4	4#触片	1	磷铜	t=0.25	镀银
3	3#触片	1	磷铜	t=0.25	镀银
2	2#触片	1	黄铜	t=0.35	镀银
1	基座	1	PBT		黑色
序号	名称	数量	材料	表面处理	

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :			
Product Name :			
PJ-322黑色			
Part NO:			
PJS11007			
	SCALE	SHEET	REV.
	1:1	1/1	A1

TOLERANCE		
X.X	±0.30	X° ±2°
.XX	±0.20	.X° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞