

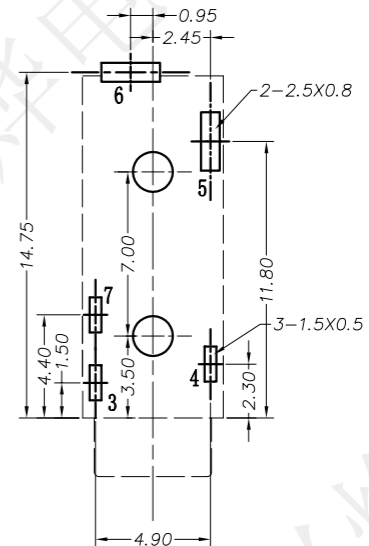

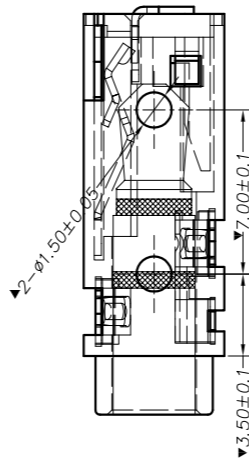
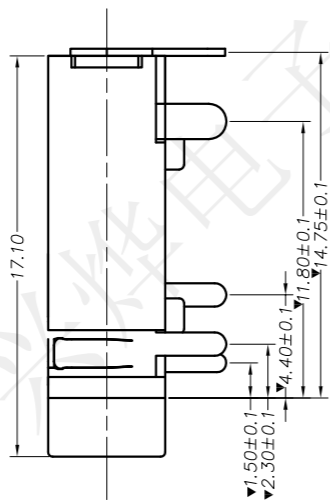
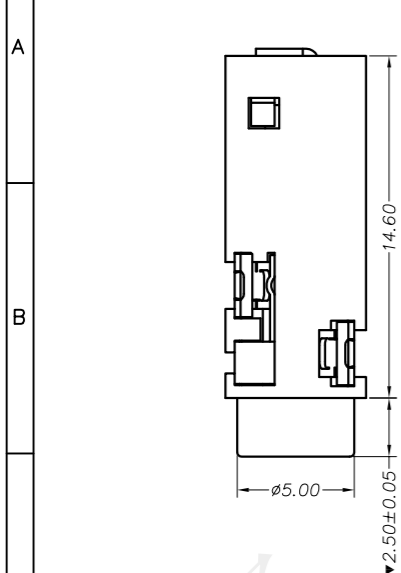


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

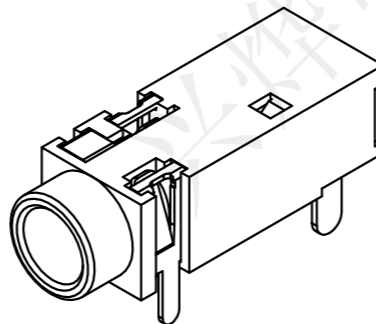

P. C. B LAYOUT TOP VIEW



SPECIFICATION:
 Operating temperature:-30℃~70℃
 Rated loading:DC 30V 0.5A
 Contact resistance:30mΩ Max
 Insulation resistance:100MΩ Min
 Withstanding voltage:AC 500V (50Hz) /min
 Insertion force:3-20N
 Pullout force:3-20N
 Life: 5000 CYCLES

受控文件



6	PJ-328A-06	后盖脚	1	磷铜	0.3T	镀银
5	PJ-328A-05	弹片脚	1	磷铜	0.3T	镀银
4	PJ-328A-04	中脚	1	镀青铜	0.25T	镀银
3	PJ-328A-03	开关脚	1	磷铜	0.2T	镀银
2	PJ-328A-02	胶盖	1	PPA		黑色
1	PJ-328A-01	基座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	处理

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd				
TOLERANCE				
X.X	±0.30	X.°	±2°	APPD: 陈爱光
.XX	±0.20	.X°	±1°	CHED: 施立敏
.XXX	±0.10	.XX°	±0.5°	DRAW: 马洪飞
UNITS	mm			

Series Name :		
Product Name : PJ-328A-5P插件		
Part NO: PJL11006		
	SCALE 1:1	SHEET 1/1
	REV. A1	