

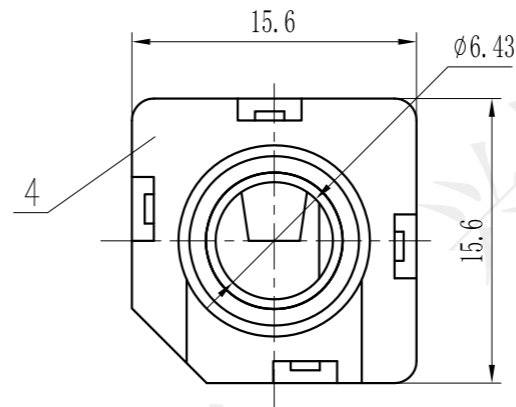
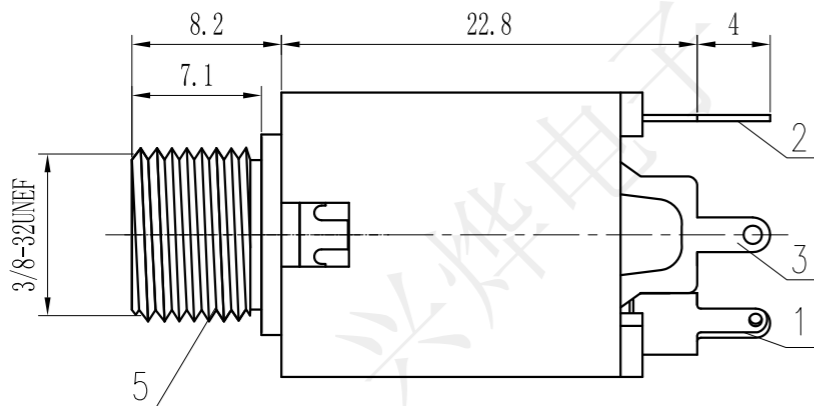


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

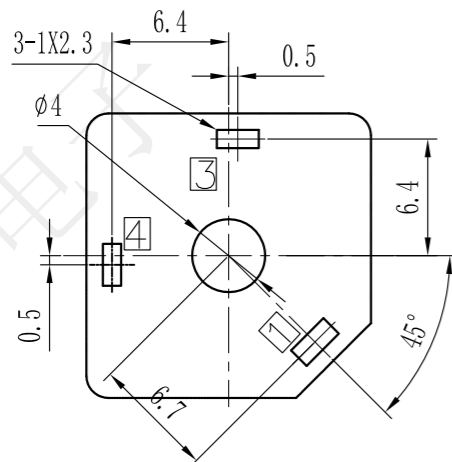

SPECIFICATION:
 Operating temperature: -25℃~70℃
 Rated loading: DC 30V1A
 Contact resistance: 30mΩ Max
 Insulation resistance: 100MΩ Min
 Withstanding voltage: AC 500V (50Hz) /min
 Insertion force: 5-30N
 Pullout force: 5-30N
 Life: 5000 CYCLES

Electrical schematic



P.C.B LAYOUT (BOTTOM VIEW)
 Tolerance: ± 0.05

受控文件

5	铜套	黄铜H59	1	镀镍	
4	基座	PBT	1	黑色	
3	4#插针	磷铜QSn6.5-0.1	1	镀锡	
2	3#插针	磷铜QSn6.5-0.1	1	镀锡	
1	1#插针	黄铜H62	1	镀锡	
序号	名称	材料	数量	镀层/颜色	备注

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd			Series Name :		
TOLERANCE			Product Prescription :		
			PJ-630A-3P 6.35		
X.X ±0.30	X.° ±2°	APPD: 陈爱光			
.XX ±0.20	.X° ±1°	Part NO: PJZ12015			
.XXX ±0.10	.XX° ±0.5°	CHED: 施立敏			
UNITS	mm	DRAW: 马洪飞			
			SCALE 1:1	SHEET 1/1	REV. A1