


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

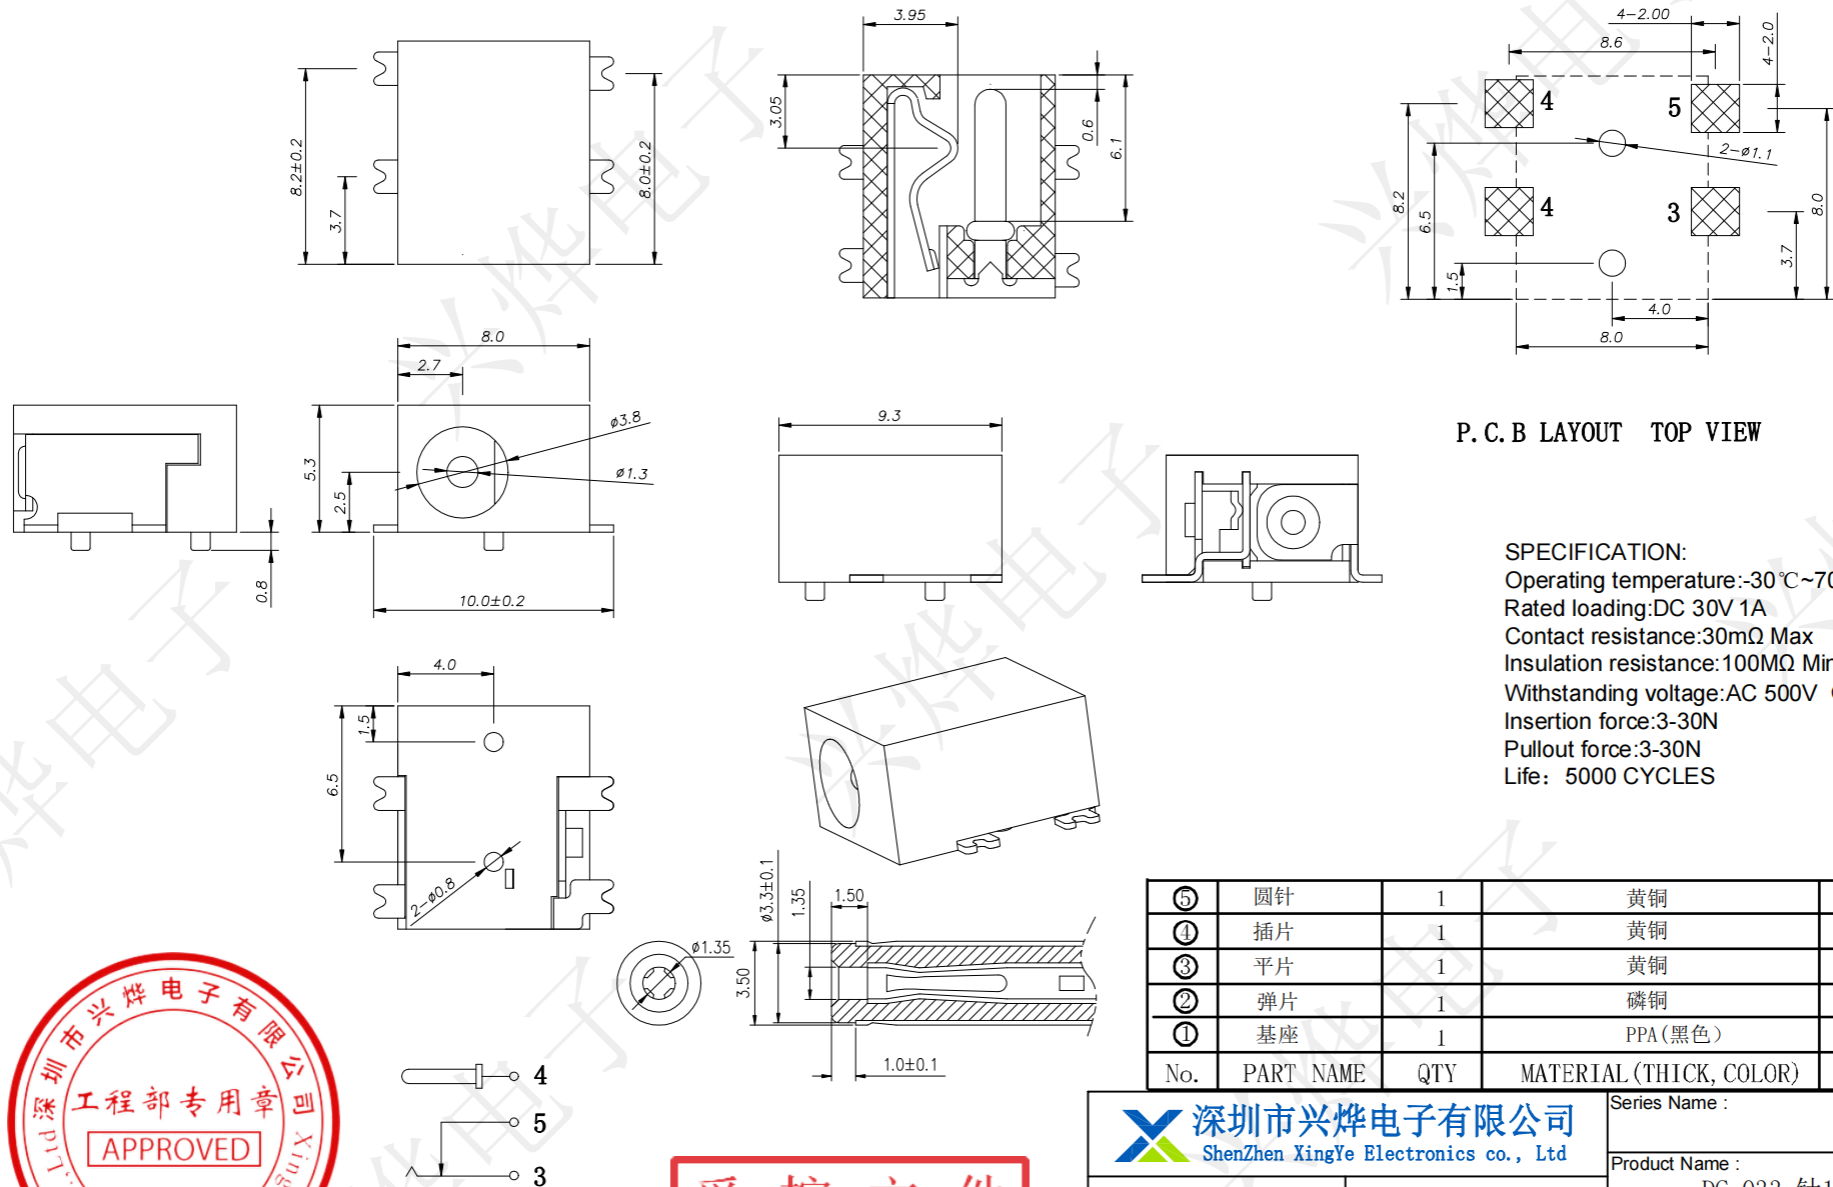

P.C.B LAYOUT TOP VIEW

SPECIFICATION:
Operating temperature:-30℃~70℃
Rated loading:DC 30V 1A
Contact resistance:30mΩ Max
Insulation resistance:100MΩ Min
Withstanding voltage:AC 500V (50Hz) /min
Insertion force:3-30N
Pullout force:3-30N
Life: 5000 CYCLES

⑤	圆针	1	黄铜	镀银
④	插片	1	黄铜	镀银
③	平片	1	黄铜	镀银
②	弹片	1	磷铜	镀银
①	基座	1	PPA(黑色)	
No.	PART NAME	QTY	MATERIAL (THICK, COLOR)	REMARK

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X ±0.30	X.* ± 2*	APPD: 陈爱光
.XX ±0.20	.X* ± 1*	CHED: 施立敏
.XXX ±0.10	.XX* ±0.5*	DRAW: 马洪飞
UNITS	mm	

Series Name :			
Product Name : DC-033 针1.3			
Part NO: DCL29038			
	SCALE	SHEET	REV.
	1:1	1/1	A1



受控文件