


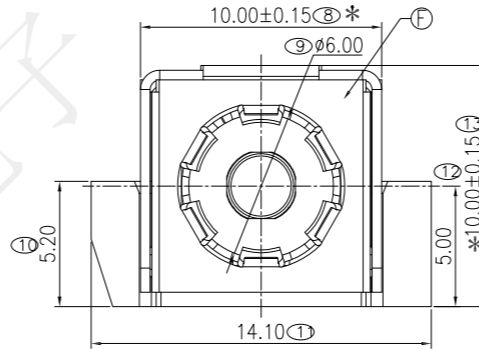



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

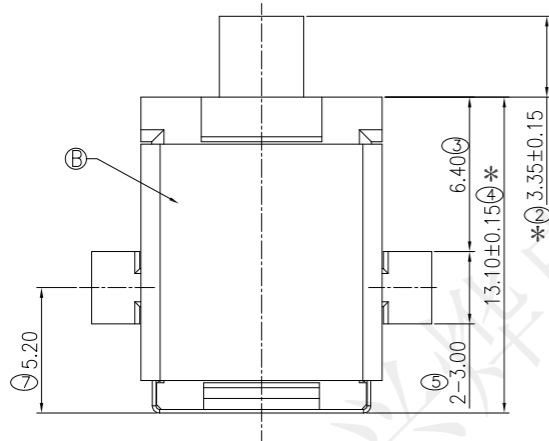

受控文件

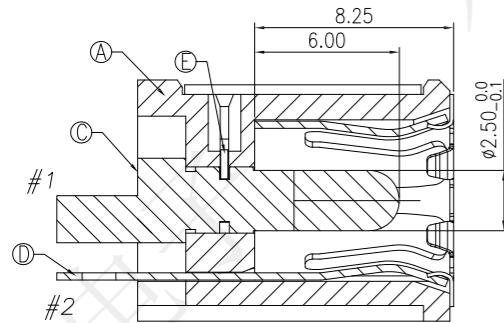

SECTION A-A

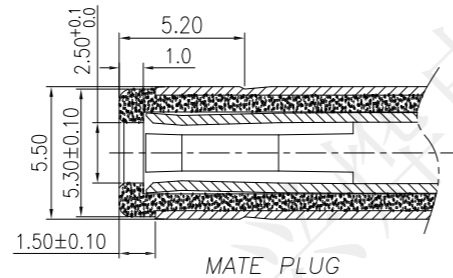

MATE PLUG


SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: 20V 10A
- 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 3.0 Kgf MAX.
- 2-2. WITHDRAWAL FORCE : 0.3Kgf MIN.
- 3. LIFE TEST: 5,000 CYCLES MIN.

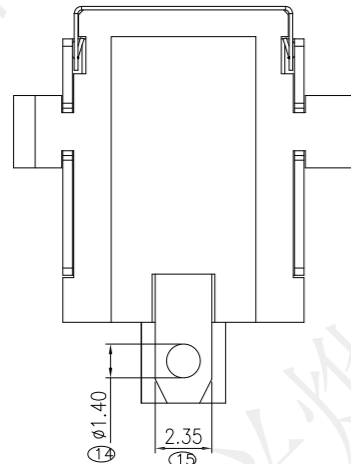

SCHEMATIC

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	COVER	1	SUS t=0.15	
E	STOPPER	1	SUS t=0.30	
D	TERMINAL SPRING	1	COPPER ALLOY t=0.30	Sn 60u"/Ni 50u"
C	CENTER PIN	1	COPPER ALLOY	GOLD FLASH
B	SHELL	1	SUS t=0.40	
A	HOUSING	1	THERMOPLASTIC	BLACK

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :

Product Name :

DC-108 6.0针大电流10A

Part NO:

DCJ19063

TOLERANCE	
X.X ±0.30	X.* ± 2*
.XX ±0.20	.X* ± 1*
.XXX ±0.10	.XX* ±0.5*
UNITS	mm

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞



SCALE
1:1

SHEET
1/1

REV.
A1