


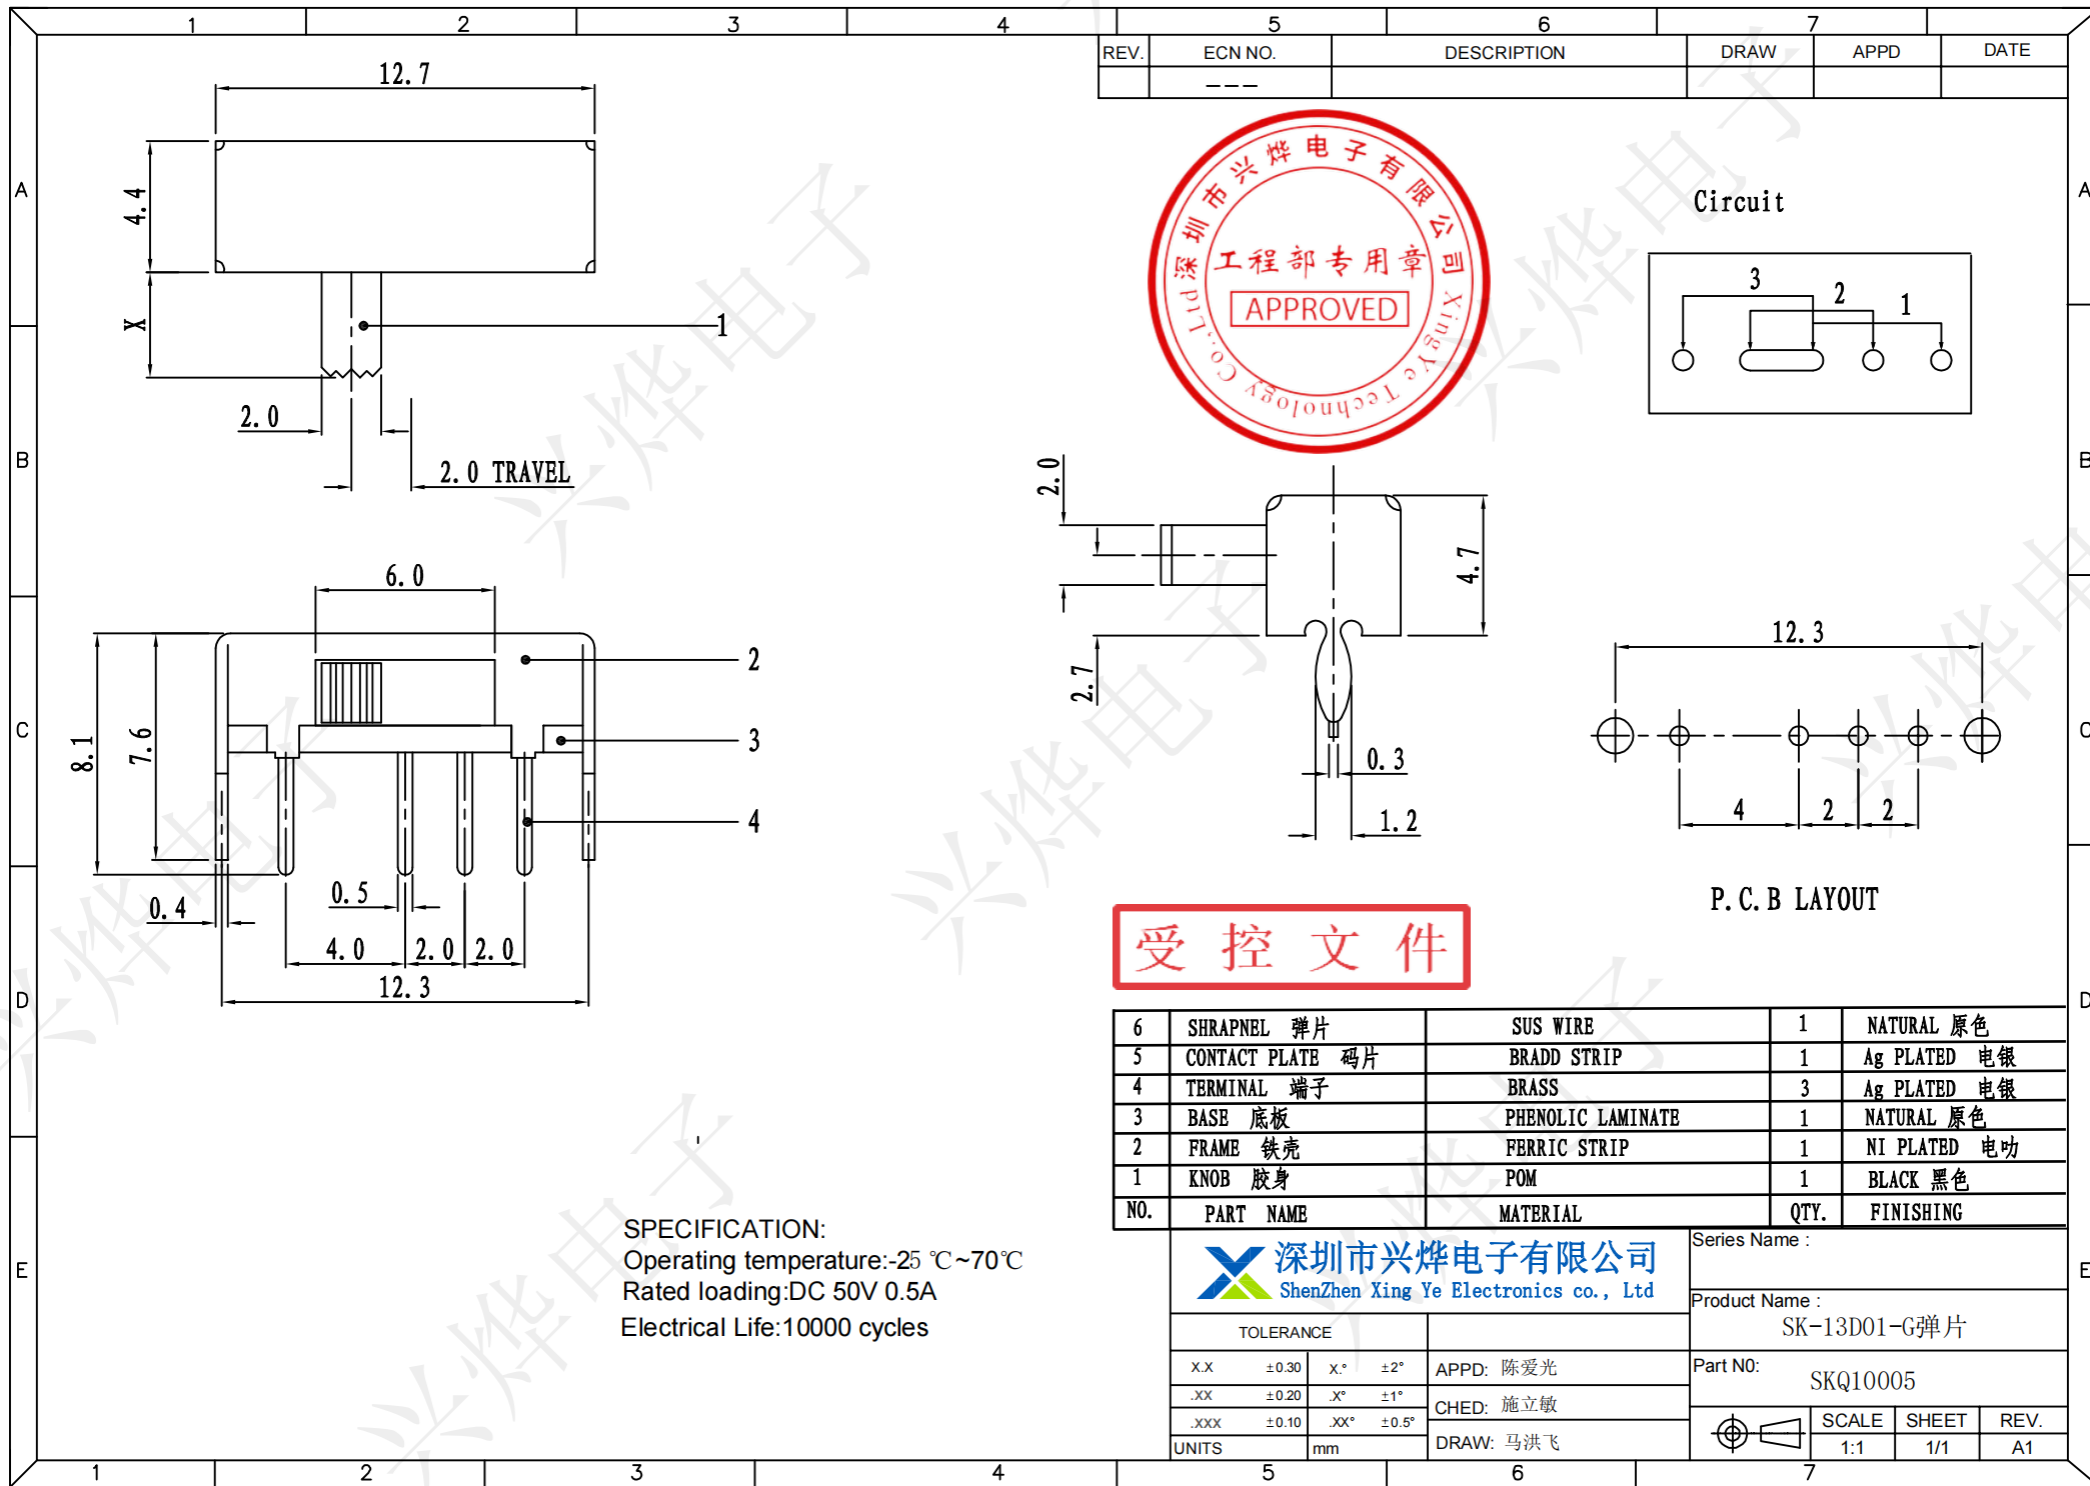


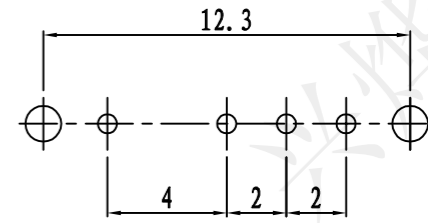

| REV. | ECN NO. | DESCRIPTION | DRAW | APPD | DATE |
|------|---------|-------------|------|------|------|
|      | ---     |             |      |      |      |

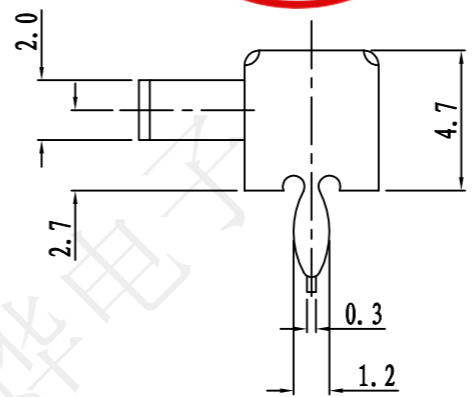

Circuit



P. C. B LAYOUT

受控文件

SPECIFICATION:  
Operating temperature:-25 °C~70°C  
Rated loading:DC 50V 0.5A  
Electrical Life:10000 cycles

|     |                  |                   |      |              |
|-----|------------------|-------------------|------|--------------|
| 6   | SHRAPNEL 弹片      | SUS WIRE          | 1    | NATURAL 原色   |
| 5   | CONTACT PLATE 码片 | BRADD STRIP       | 1    | Ag PLATED 电银 |
| 4   | TERMINAL 端子      | BRASS             | 3    | Ag PLATED 电银 |
| 3   | BASE 底板          | PHENOLIC LAMINATE | 1    | NATURAL 原色   |
| 2   | FRAME 铁壳         | FERRIC STRIP      | 1    | NI PLATED 电叻 |
| 1   | KNOB 胶身          | POM               | 1    | BLACK 黑色     |
| NO. | PART NAME        | MATERIAL          | QTY. | FINISHING    |

深圳市兴烨电子有限公司  
ShenZhen Xing Ye Electronics co., Ltd

| TOLERANCE |       |            |
|-----------|-------|------------|
| X.X       | ±0.30 | X° ±2°     |
| .XX       | ±0.20 | .X° ±1°    |
| .XXX      | ±0.10 | .XX° ±0.5° |
| UNITS     | mm    |            |

|                                |       |      |
|--------------------------------|-------|------|
| Series Name :                  |       |      |
| Product Name :<br>SK-13D01-G弹片 |       |      |
| Part NO:<br>SKQ10005           |       |      |
| SCALE                          | SHEET | REV. |
| 1:1                            | 1/1   | A1   |

APPD: 陈爱光  
CHED: 施立敏  
DRAW: 马洪飞