

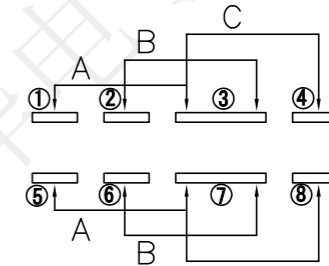
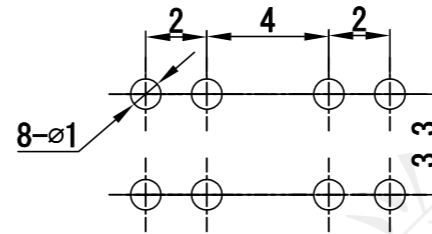
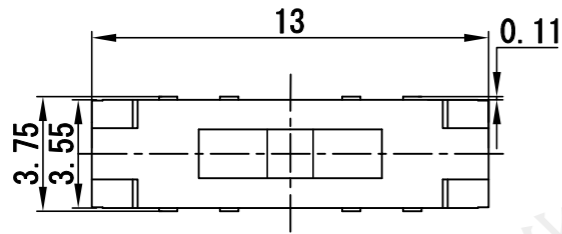


REV.	ECN NO.	DESCRIPTION	DRAW	APPD	DATE

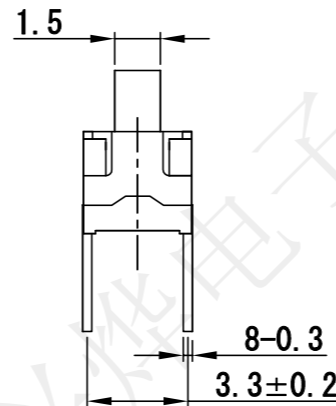

**P. B. LAYOUT DIMENSION
TOP VIEW**

CIRCUIT

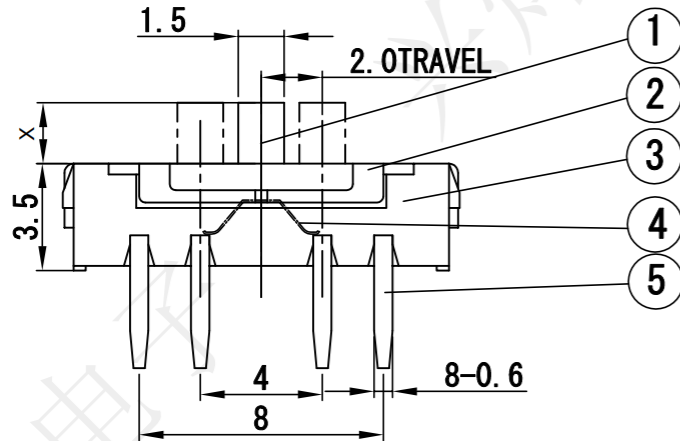

SPECIFICATION:

Operating temperature:-16 °C~60°C

Rated loading:DC 12V 0.1A

Contact resistance:80mΩ Max

Insulation resistance:100MΩ Min

Withstanding voltage:AC 500V (50-60Hz) /min

Electrical Life:10000 cycles

Operating force:200±50gf Max



受控文件

5	TERMINAL a, b&c	C2680	8	Ag
4	CONTACT	C5191	2	Ag
3	BOTTOM	PA46	1	BLACK
2	COVER	SUS	1	NATURAL
1	STEM	PA66	1	BLACK/WHITE
NO.	PARTS	MATERIAL	QTY.	FINISHING

深圳市兴烨电子有限公司 ShenZhen Xing Ye Electronics co., Ltd		Series Name :	
		Product Name : MSS-23D19八脚立插	
TOLERANCE		Part NO: SKL10023	
X.X ±0.30	X° ±2°	APPD: 陈爱光	
.XX ±0.20	.X° ±1°	CHED: 施立敏	
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞	
UNITS	mm	SCALE 1:1	
		SHEET 1/1	
		REV. A1	