

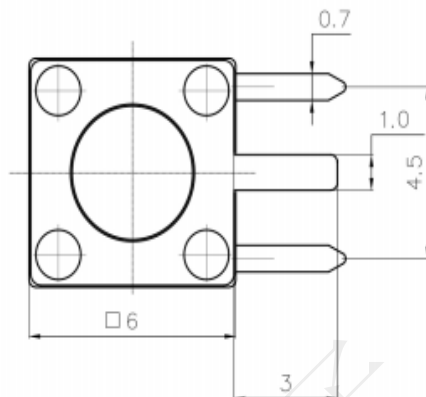



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

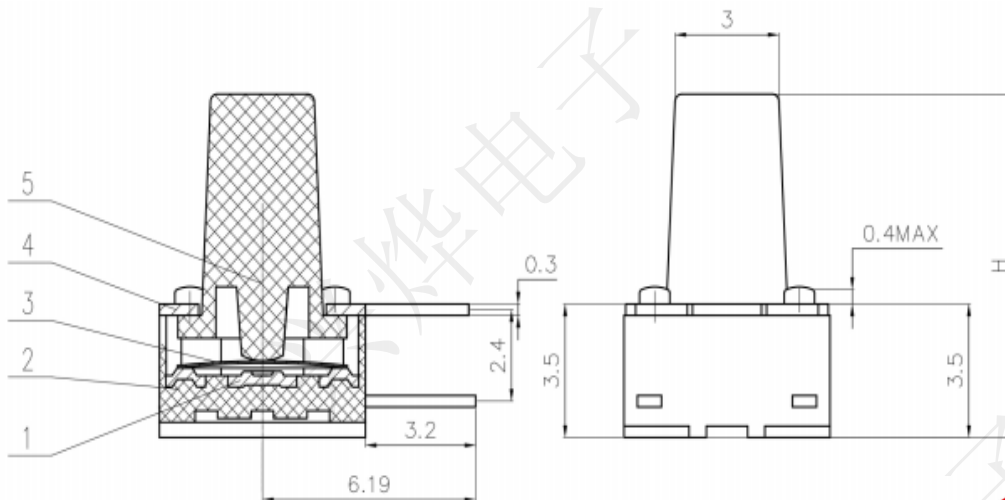

受控文件

SPECIFICATION:

Operating temperature:-25℃~70℃
Rated loading:AC 12V 50mA
Contact resistance:100mΩ Max
Insulation resistance:100MΩ Min
Withstanding voltage:AC 250V (50Hz) /min
Operating force:250±30gf Max
Electrical Life: 50000 cycles

5	按钮	1PCS	PPA	
4	盖片	1PCS	铜	镀铜锡
3	弹片	1PCS	不锈钢	
2	底座	1PCS	PPA	
1	接线片	1PCS	黄铜	镀银
序列号	名称	数量	材料	备注

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :

Product Description :

6*6*5边三脚不锈钢260G编带

Part No:

TSX12066

TOLERANCE

XX	±0.30	X°	±2°
.XX	±0.20	X°	±1°
.XXX	±0.10	XX°	±0.5°
UNITS	mm		

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞



SCALE	SHEET	REV.
1:1	1/1	A1