


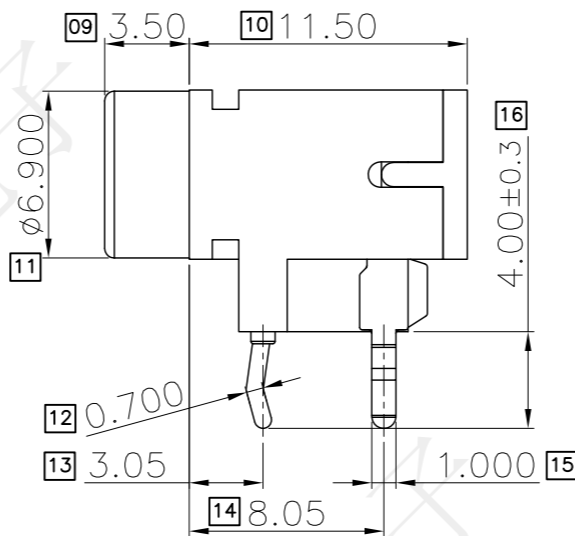


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

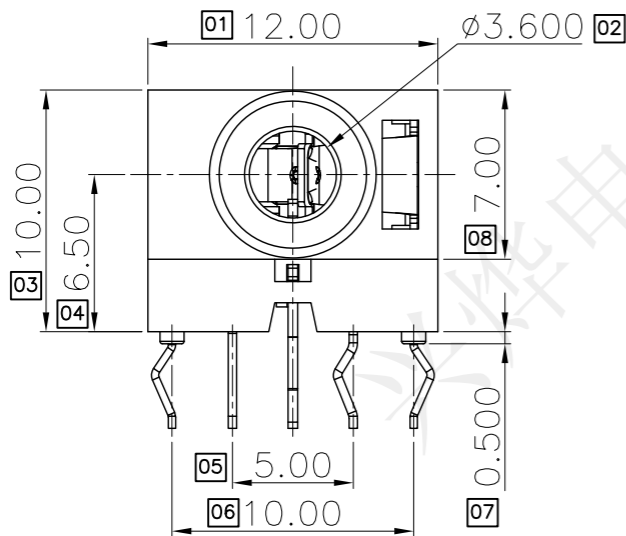


受控文件

SPECIFICATION:
 Operating temperature:-30℃~70℃
 Rated loading:DC 30V 0.5A
 Contact resistance:30mΩ Max
 Insulation resistance:100MΩ Min
 Withstanding voltage:AC 500V (50Hz) /min
 Insertion force:3-30N
 Pullout force:3-30N
 Life: 5000 CYCLES

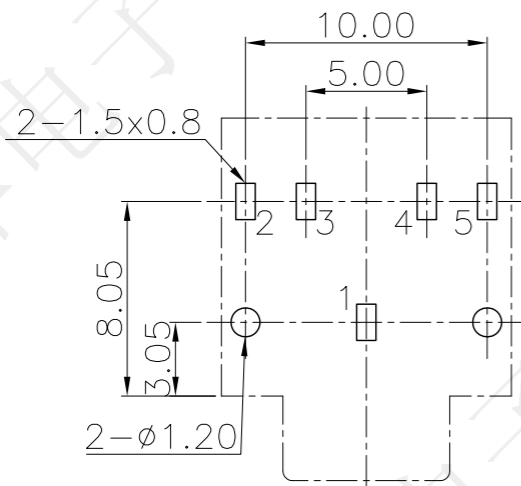

PCB HOLES(TOP VIEW) t=1.6mm
 GENERAL TOLERANCE:±0.1mm

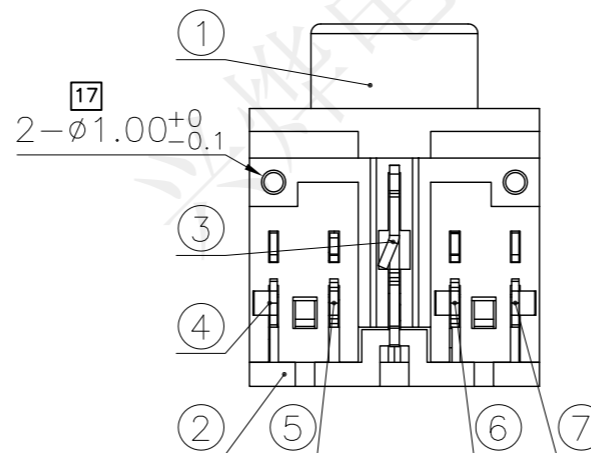

⑦	TERMINAL5#	5	1	BRONZE t=0.3	SnSb PLATED
⑥	TERMINAL4#	4	1	BRASS t=0.35	CuSn PLATED
⑤	TERMINAL3#	3	1	BRASS t=0.35	CuSn PLATED
④	TERMINAL2#	2	1	BRONZE t=0.3	SnSb PLATED
③	TERMINAL1#	1	1	BRASS t=0.4	CuSn PLATED
②	COVER		1	PBT	/
①	HOUSING		1	PBT	/
No.	PART NAME	TER'NO.	Q'TY	MATERIAL	REMARK

深圳市兴烨电子有限公司
 ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X	±0.30	X.° ±2°
.XX	±0.20	.X.° ±1°
.XXX	±0.10	.XX.° ±0.5°
UNITS	mm	

APPD: 陈爱光
 CHED: 施立敏
 DRAW: 马洪飞

Series Name :		
Product Name : PJ-3170弯脚插		
Part NO: PJL22112		
SCALE 1:1	SHEET 1/1	REV. A1