

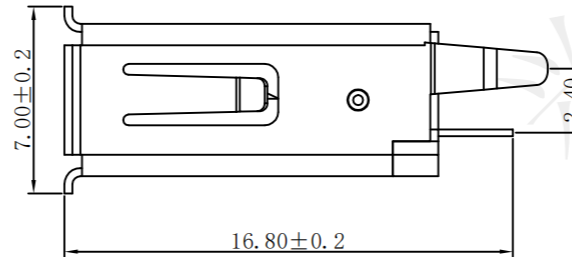
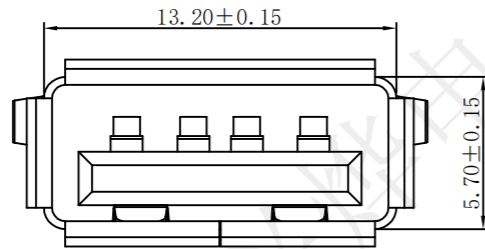


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

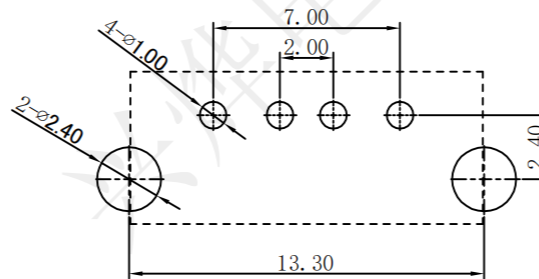

受控文件

Specification:
Current rating:DC 1.5A 30V
Dielectric withstanding voltage: 500 V(ac) for 1 min.
Contact resistance: 30 mΩ Max.
Insulation resistance: 100 MΩ Min.
Total mating force: 3.57 Kgf Max.
Total unmating force: 1.0 Kgf Min.
Temperature range: -30°C~80°C

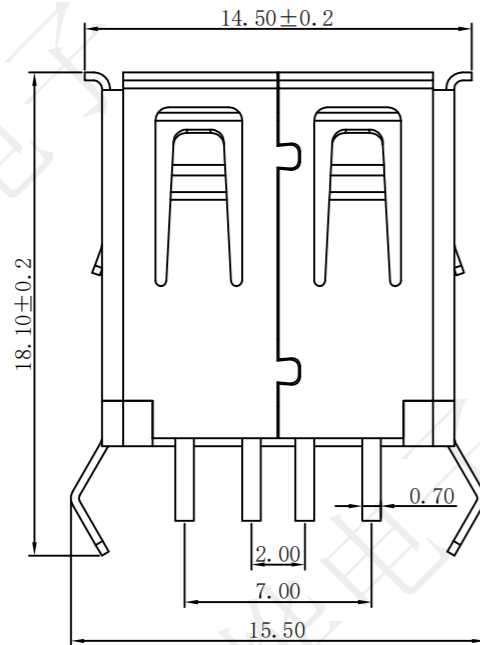


PCB LAYOUT

3	Shell	1PCS	iron	t=0.3mm
2	Contacts	4PCS	copper alloy	t=0.25mm
1	Housing	1PCS	LCP	black/UL94v-0
No.	Pare Name	Number	Material	Remarks

 深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
.XX	±0.30	X.° ±2°
.XX	±0.20	X.° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	

Series Name :		
Product Name :		
AF180度13.7白胶弯脚卷口铁		
Part N0:		
USBN48014		
	SCALE	SHEET
	1:1	1/1
	REV.	A1

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞