

|     |           |        |                     |          |
|-----|-----------|--------|---------------------|----------|
| 3   | Shell     | 1PCS   | copper alloy/SUS304 | t=0.25mm |
| 2   | Contacts  | 5PCS   | copper alloy        | t=0.20mm |
| 1   | Housing   | 1PCS   | LCP                 | UL94v-0  |
| No. | Pare Name | Number | Material            | Remarks  |

|           |
|-----------|
| APPD: 陈爱光 |
| CHED: 施立敏 |
| DRAW: 马洪飞 |

|               |                   |
|---------------|-------------------|
| Series Name : | MICRO-5P 全贴带柱卷边编带 |
|---------------|-------------------|

|                       |  |
|-----------------------|--|
| Product Description : |  |
|-----------------------|--|



Part N0:

|                                                                                       |       |       |      |
|---------------------------------------------------------------------------------------|-------|-------|------|
|  | SCALE | SHEET | REV. |
|                                                                                       | 1:1   | 1/1   | A1   |



Specification:

Current rating: 1,5PIN 1.8A Max/2,3,4PIN 1A Max.  
Dielectric withstanding voltage: 100 V(ac) for 1 min.  
Contact resistance: 30 mΩ Max.  
Insulation resistance: 100 MΩ Min.  
Total mating force: 3.57 Kgf Max.  
Total unmating force: 1.0 Kgf Min.  
Temperature range: -30°C~80°C

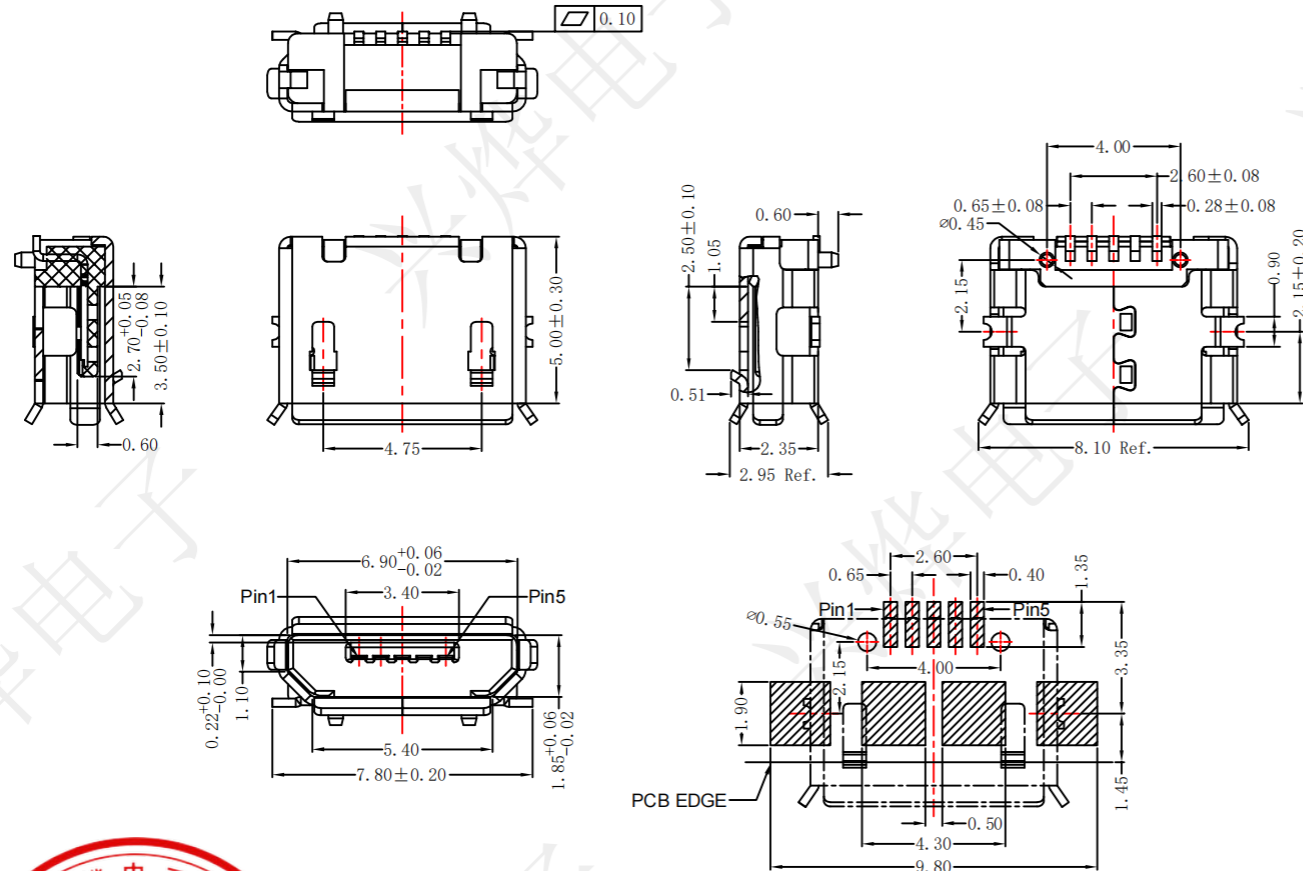

RECOMMENDED PCB LAYOUT PCB图仅供参考

 深圳市兴烨电子有限公司  
ShenZhen XingYe Electronics co., Ltd

| TOLERANCE |       |      |       |
|-----------|-------|------|-------|
| X.X       | ±0.30 | X.°  | ±2°   |
| .XX       | ±0.20 | .X°  | ±1°   |
| .XXX      | ±0.10 | .XX° | ±0.5° |
| UNITS     |       | mm   |       |