
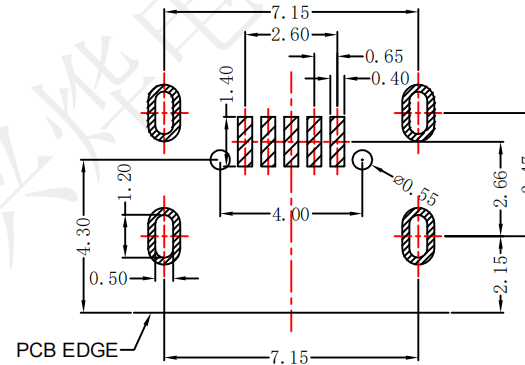
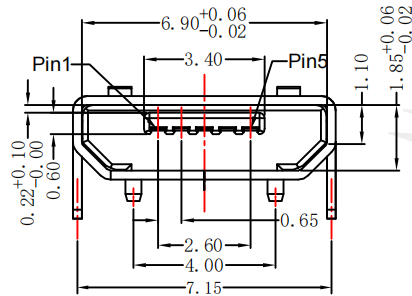
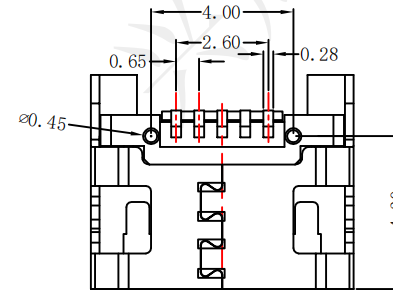


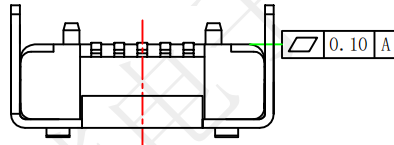


| REV. | ECN NO. | DESCRIPTION | DRAW | APPD | DATE |
|------|---------|-------------|------|------|------|
| A    | ---     |             |      |      |      |



RECOMMENDED PCB LAYOUT  
PCB图仅供参考

Specification:  
Current rating: 1.5PIN 1.8A Max/2,3,4PIN 1A Max.  
Contact resistance: 30 mΩ Max.  
Insulation resistance: 100 MΩ Min.  
Total mating force: 3.57 Kgf Max.  
Total unmating force: 1.0 Kgf Min.  
Temperature range: -30°C~80°C

|          |                                |
|----------|--------------------------------|
| MKF26109 | MICRO-5P四脚插7.2有柱平口脚长1.1铜雾锡编带   |
| MKF26110 | MICRO-5P四脚插7.2有柱平口脚长1.1铜镀镍编带   |
| MKF26111 | MICRO-5P四脚插7.2有柱平口脚长1.1不锈钢雾锡编带 |
| MKF26112 | MICRO-5P四脚插7.2有柱平口脚长1.1不锈钢镀镍编带 |



受控文件

深圳市兴烨电子有限公司  
ShenZhen XingYe Electronics co., Ltd

Series Name :  
MICRO-5P四脚插7.2有柱平口脚长1.1编带  
Product Description :

|     |           |        |                     |          |
|-----|-----------|--------|---------------------|----------|
| 3   | Shell     | 1PCS   | copper alloy/SUS304 | t=0.25mm |
| 2   | Contacts  | 5PCS   | copper alloy        | t=0.20mm |
| 1   | Housing   | 1PCS   | LCP                 | UL94v-0  |
| No. | Pare Name | Number | Material            | Remarks  |

| TOLERANCE |       |      |       | APPD: 陈爱光<br><br>CHED: 施立敏<br><br>DRAW: 马洪飞 |
|-----------|-------|------|-------|---------------------------------------------|
| X.X       | ±0.30 | X.°  | ±2°   |                                             |
| .XX       | ±0.20 | .X.° | ±1°   |                                             |
| .XXX      | ±0.10 | .XX° | ±0.5° |                                             |
| UNITS     | mm    |      |       |                                             |

|          |       |       |      |
|----------|-------|-------|------|
| Part N0: | SCALE | SHEET | REV. |
|          | 1:1   | 1/1   | A1   |