
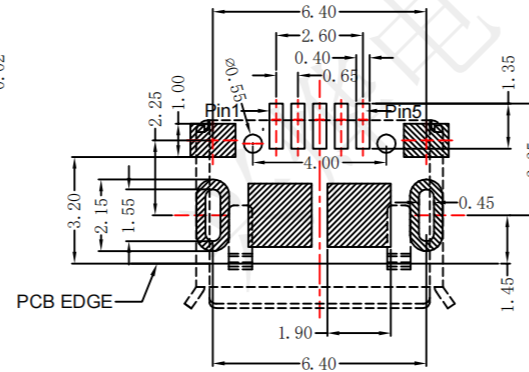
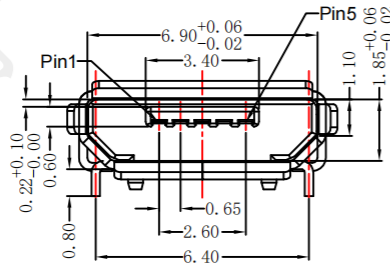
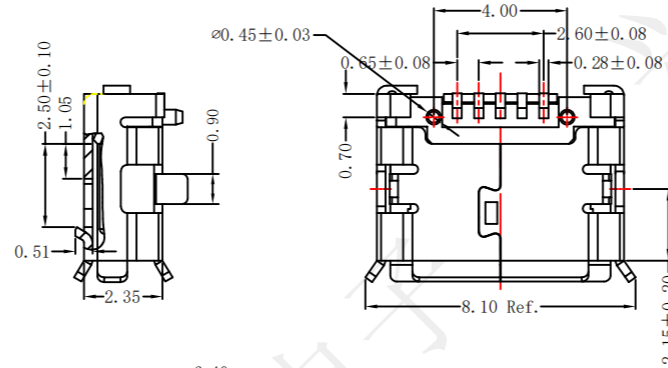


REV.	ECN NO.	DESCRIPTION	DRAW	APPD	DATE
A	---				

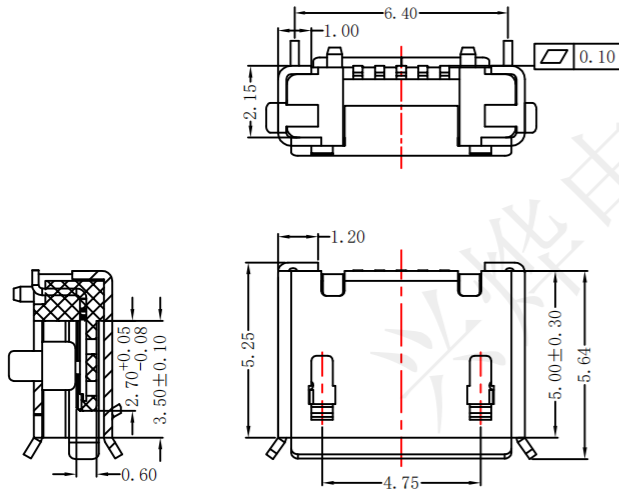

RECOMMENDED PCB LAYOUT
PCB图仅供参考

Specification:
Current rating: 1,5PIN 1.8A Max/2,3,4PIN 1A Max.
Dielectric withstanding voltage: 100 V(ac) for 1 min.
Contact resistance: 30 mΩ Max.
Insulation resistance: 100 MΩ Min.
Total mating force: 3.57 Kgf Max.
Total unmating force: 1.0 Kgf Min.
Temperature range: -30°C~80°C

受控文件

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

MKF26033	MICRO-5P内插有柱6.4卷边铜雾锡编带
MKF26034	MICRO-5P内插有柱6.4卷边铜镀镍编带
MKF26035	MICRO-5P内插有柱6.4卷边不锈钢雾锡编带
MKF26036	MICRO-5P内插有柱6.4卷边不锈钢镀镍编带

Series Name :
MICRO-5P内插有柱6.4卷边编带

Product Description :

Part NO:



SCALE	SHEET	REV.
1:1	1/1	A1

3	Shell	1PCS	copper alloy/SUS304	t=0.25mm
2	Contacts	5PCS	copper alloy	t=0.20mm
1	Housing	1PCS	LCP	UL94v-0
	Remarks			

TOLERANCE			
X.X	±0.30	X.°	±2°
.XX	±0.20	.X.°	±1°
.XXX	±0.10	.XX.°	±0.5°
UNITS	mm		

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞