



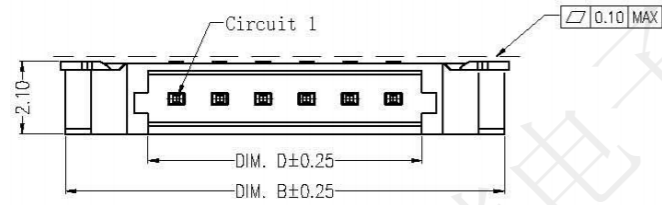
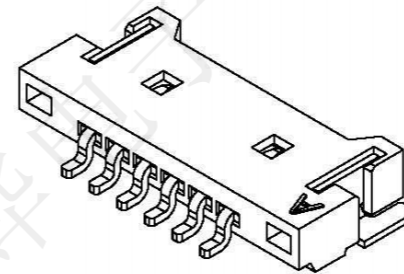


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



02


03

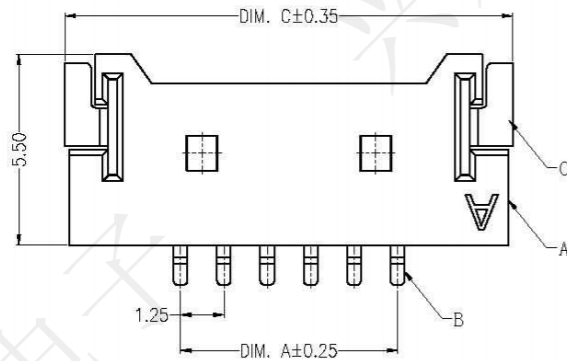

主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$
额定电压 (Rated voltage): 125V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

PIN数	料号	尺寸			
		A	B	C	D
2P	TZD24198	1.25	7.65	7.90	2.90
3P	TZD24199	2.50	8.90	9.15	4.15
4P	TZD24200	3.75	10.15	10.40	5.40
5P	TZD24201	5.00	11.40	11.65	6.65
6P	TZD24202	6.25	12.65	12.90	7.90
7P	TZD24203	7.50	13.90	14.15	9.15
8P	TZD24204	8.75	15.15	15.40	10.40
9P	TZD24205	10.00	16.40	16.65	11.65
10P	TZD24206	11.25	17.65	17.90	12.90
11P	TZD24207	12.50	18.90	19.15	14.15
12P	TZD24208	13.75	20.15	20.40	15.40
13P	TZD24209	15.00	21.40	21.65	16.65
14P	TZD24210	16.25	22.65	22.90	17.90
15P	TZD24211	17.50	23.90	24.15	19.15

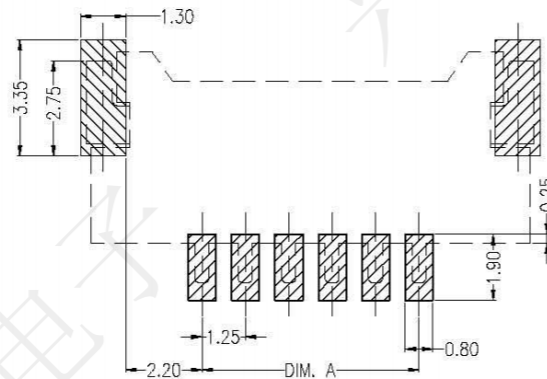

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

受 控 文 件

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
.XX	±0.30	X° ±2°
.XX	±0.20	X° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞



Series Name:
1.25-nP超薄编带

Product Name:

Part NO:



SCALE
1:1

SHEET
1/1

REV.
A1