
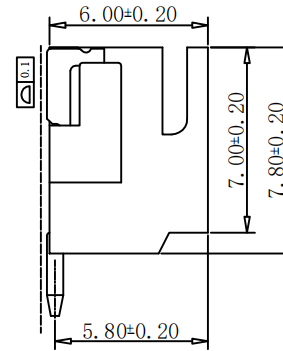




REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

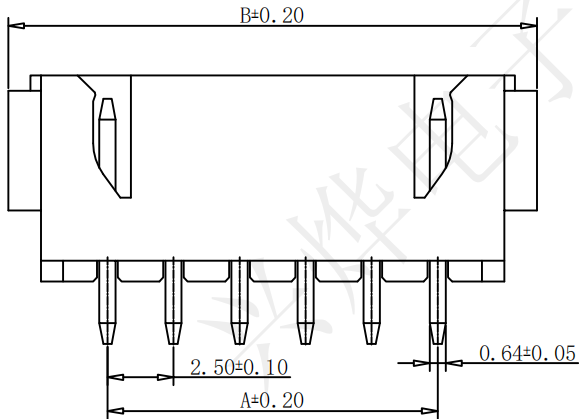

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: LCP UL94V-0
PIN brass Tin-plated
Solder tab brass Tin-plated

受控文件

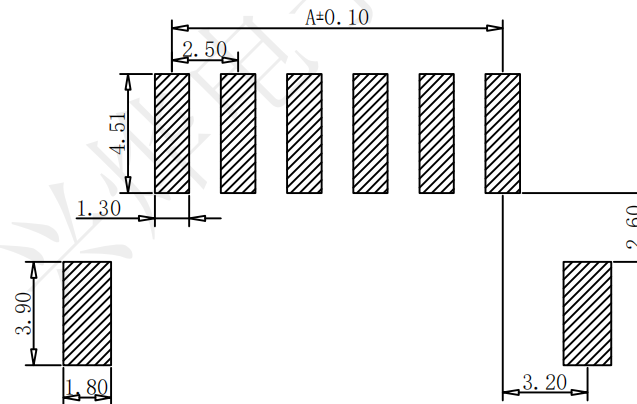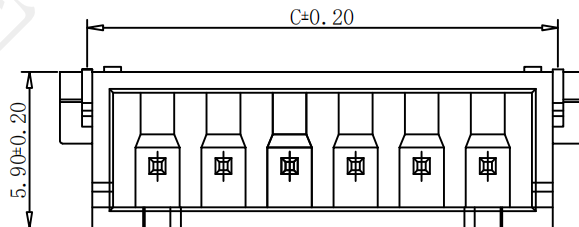

PIN数	料号	尺寸		
		A	B	C
2P	TZL24114	2.5	10.0	7.8
3P	TZL24115	5.0	12.5	10.3
4P	TZL24116	7.5	15.0	12.8
5P	TZL24117	10.0	17.5	15.3
6P	TZL24118	12.5	20.0	17.8
7P	TZL24119	15.0	22.5	20.3
8P	TZL24120	17.5	25.0	22.8
9P	TZL24121	20.0	27.5	25.3
10P	TZL24122	22.5	30.0	27.8
11P	TZL24123	25.0	32.5	30.3
12P	TZL24124	27.5	35.0	32.8
13P	TZL24125	30.0	37.5	35.3
14P	TZL24126	32.5	40.0	37.8
15P	TZL24127	35.0	42.5	40.3
16P	TZL24128	37.5	45.0	42.8



		Series Name :	
TOLERANCE		Product Description :	
X.X ±0.30	X.* ± 2°	Part N0:	
.XX ±0.20	.X* ± 1°	SCALE 1:1	
.XXX ±0.10	.XX* ±0.5°		
UNITS	mm	SHEET 1/1 REV. A1	

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

APPD: 姚人凤

CHED: 施立敏

DRAW: 马洪飞