

5		6		7	
REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

NOTE:



 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd				Series Name :			
				Product Name : TYPE-CF-16P板上四脚插L8.0垫高1.6 CH3.18			
TOLERANCE							
XX	±0.30	X°	±2°	APPD: 陈爱光			
XX	±0.20	X°	±1°	CHED: 施立敏			
XXX	±0.10	XX°	±0.5°	DRAW: 马洪飞			
UNITS		mm					

1		2		3		5		6		7			
REV.		ECN NO.		DESCRIPTION		DRAW		APPD.		DATE			
A		---											

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)


TOLERANCE FOR PCB LAYOUT IS ± 0.05

受控文件

				Series Name :	
Shenzhen XingYe Electronics co., Ltd				Product Name :	
				TYPE-CF-16P板上四脚插L8.0垫高1.6 CH3.18	
TOLERANCE				Part NO:	
				UCB27551	
X.X ±0.30		X.° ±2°		APPD: 陈爱光	
.XX ±0.20		X° ±1°		CHED: 施立敏	
.XXX ±0.10		XX° ±0.5°		DRAW: 马洪飞	
UNITS		mm			


SCALE		SHEET		REV.	
1:1		1/1		A1	

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

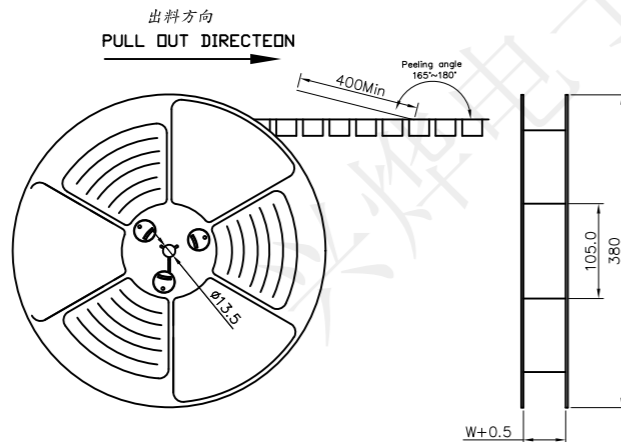


NOTES

1.帶子引導長度 LEAD TAPE LENGTH

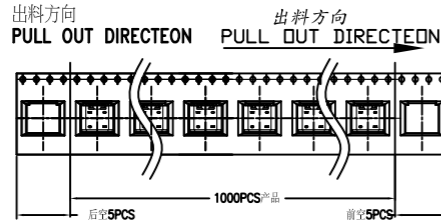

- 2.上帶剝離力為: 0.1~1.3N(10.2gf~130gf)
 PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
 出貨運輸過程中一定注意:
 THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
 卷帶在運輸過程中不能散開
 PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

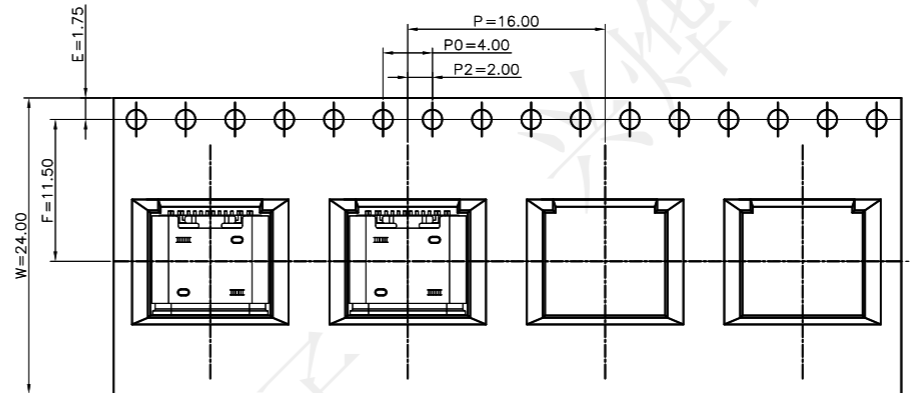

TAPE & REEL 6 PCS


1 REEL
= 1000 PCS



BOX

DIMENSIONS:
39.5X39.5X20

LABEL



1 CARTON
= 6 REELS
= 6000 PCS

受控文件



包裝明細表 (The detail of the packing) Carton					
包裝容量 (Packing Capacity)			重量 Weight (Kg)		
pcs/box	boxes/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
1000	6	6000	—	—	—

		Series Name :	
		Product Name :	
TOLERANCE		TYPE-CF-16P板上四脚插L8.0墊高1.6 CH3. 18	
X.X ±0.30	X° ±2°	APPD: 陈爱光	
.XX ±0.20	.X° ±1°	CHED: 施立敏	
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞	
UNITS	mm	Part N0: UCB27551	
		SCALE	SHEET
		1:1	1/1
		REV.	A1