


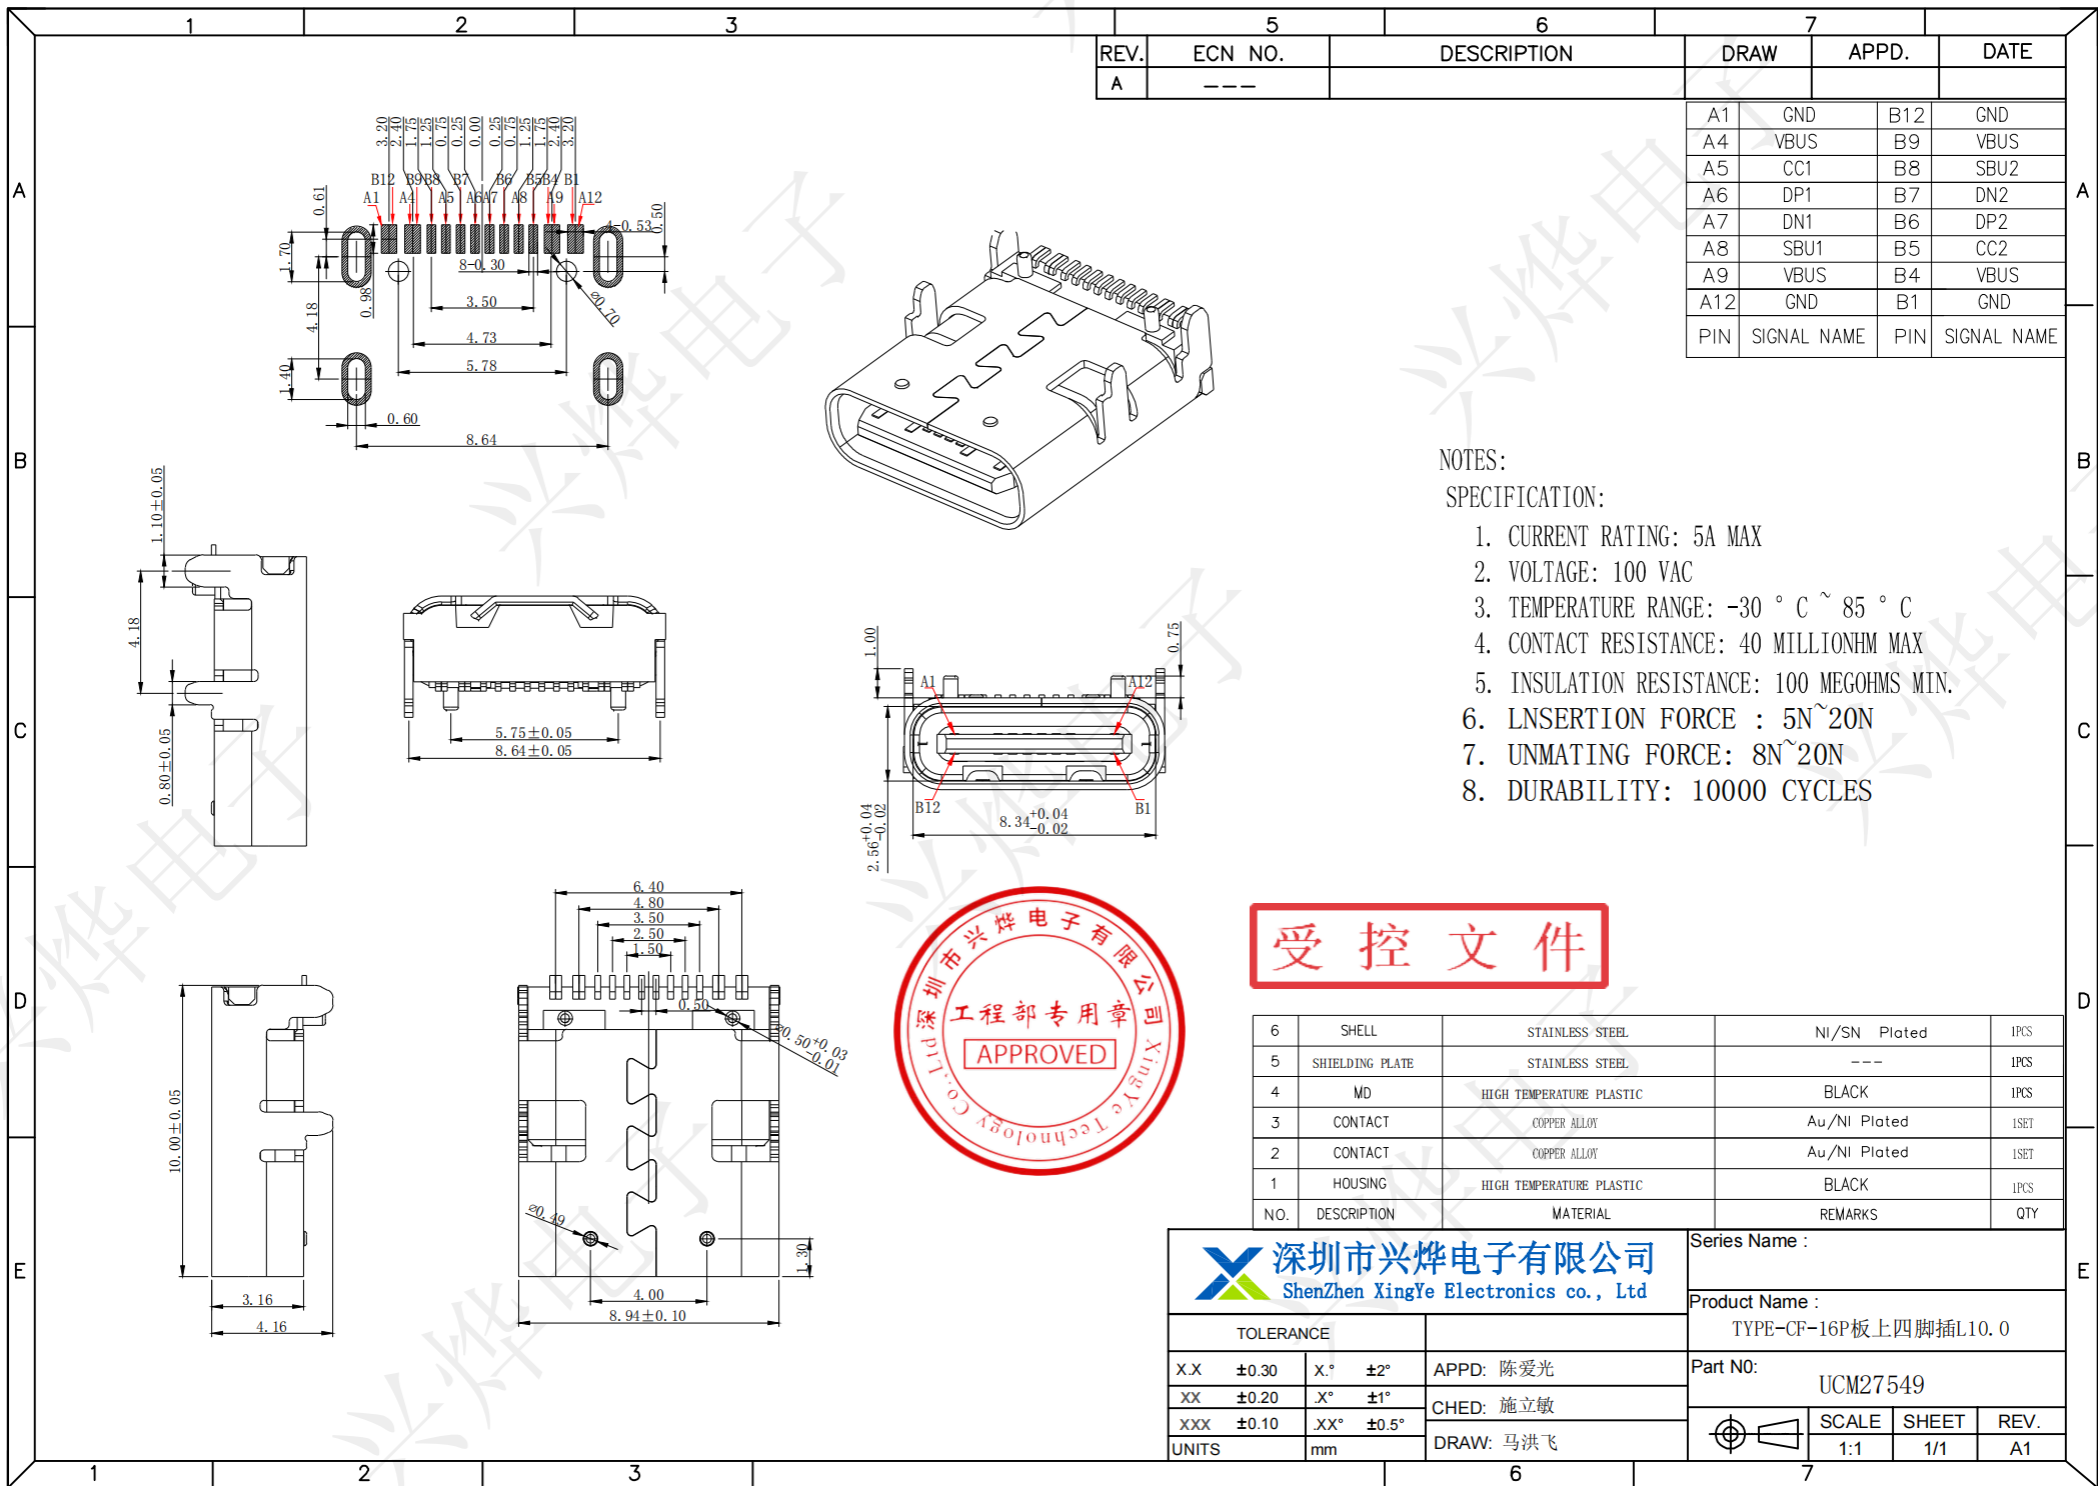

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- SPECIFICATION:
- CURRENT RATING: 5A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 ° C ~ 85 ° C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10000 CYCLES

受控文件

6	SHELL	STAINLESS STEEL	NI/SN Plated	IPCS
5	SHIELDING PLATE	STAINLESS STEEL	---	IPCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	IPCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	IPCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd			Series Name :								
			Product Name :								
TOLERANCE			TYPE-CF-16P板上四脚插L10.0								
X.X ±0.30		X.° ±2°	APPD: 陈爱光								
XX ±0.20		X° ±1°	Part NO:								
XXX ±0.10		XX° ±0.5°	UCM27549								
UNITS		mm	 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>1/1</td><td>A1</td></tr></table>			SCALE	SHEET	REV.	1:1	1/1	A1
SCALE	SHEET	REV.									
1:1	1/1	A1									
DRAW: 马洪飞											