
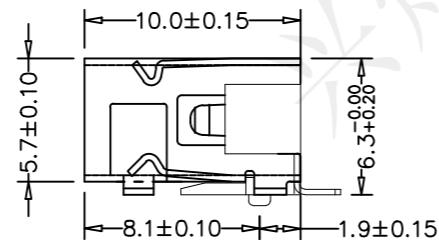
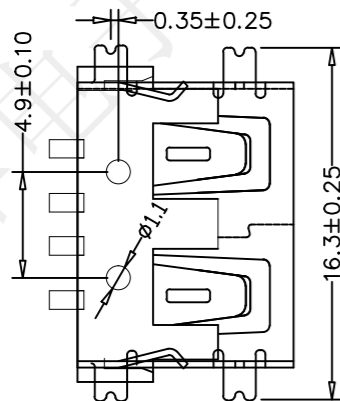
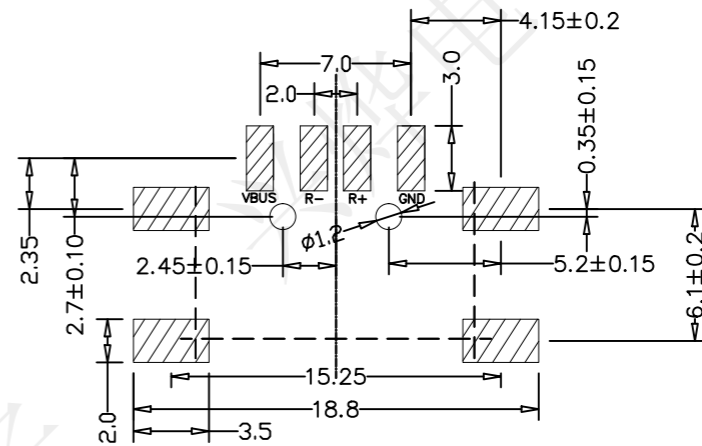
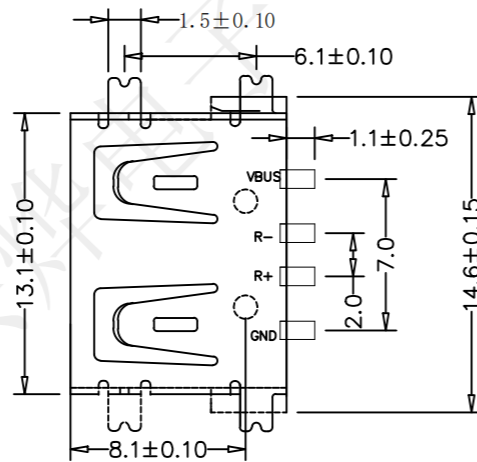


5		6		7	
REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

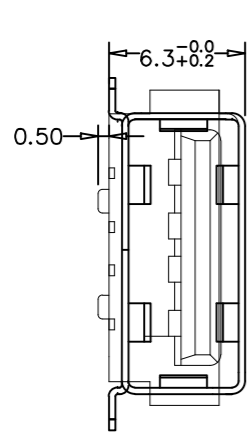

受控文件

Specification:

Current rating:DC 1.5A 30V

Dielectric withstanding voltage: 500 V(ac) for 1 min.

Contact resistance: 30 mΩ Max.

Insulation resistance: 100 MΩ Min.

Total mating force: 3.57 Kgf Max.

Total unmating force: 1.02 Kg f Min.

Temperature range: -30°C~80°C

3	Shell	1PCS	copper alloy	t=0.3mm
2	Contacts	4PCS	copper alloy	t=0.25mm
1	Housing	1PCS	LCP	black/UL94v-0
No.	Pare Name	Number	Material	Remarks

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd			Series Name :		
TOLERANCE			Product Description : AF90度短体10.0四脚全贴带柱H6.3平口铁黑胶编带		
X.X ±0.30 .XX ±0.20 .XXX ±0.10 UNITS	X° ±2° X° ±1° .XX° ±0.5° mm	APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞	Part NO: USBG48087		
				SCALE 1:1	SHEET 1/1
			REV. A1		