
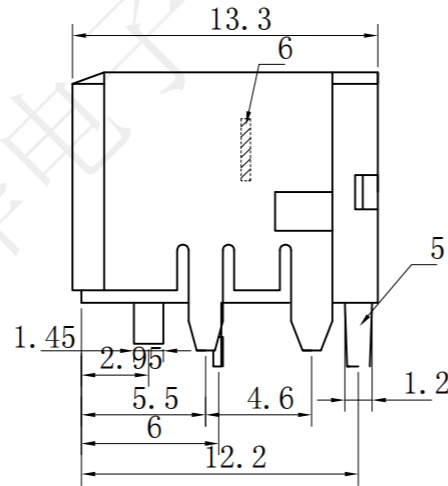


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

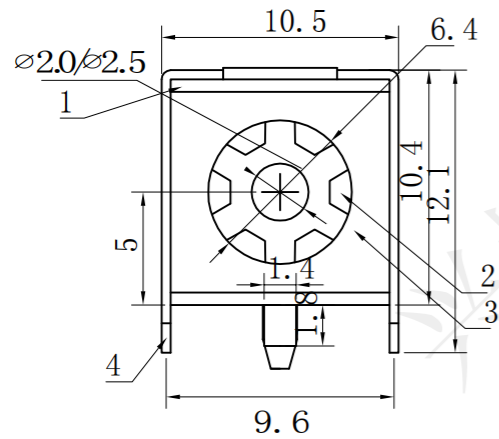

受控文件

SPECIFICATION:

Operating temperature:-40℃~55℃

Rated loading:DC 30V 10.0A

Contact resistance:20mΩ Max

Insulation resistance:100MΩ Min

Withstanding voltage:AC 250V (50Hz) /min

Insertion force:3-15N

Pullout force:3-15N

Life: 5000 CYCLES

主要技术要求


1. 未注线性公差:

0.0-10.0mm ±0.10mm


10.0-20.0mm ±0.15mm

20.0-50.0mm ±0.20mm

线路板开孔尺寸

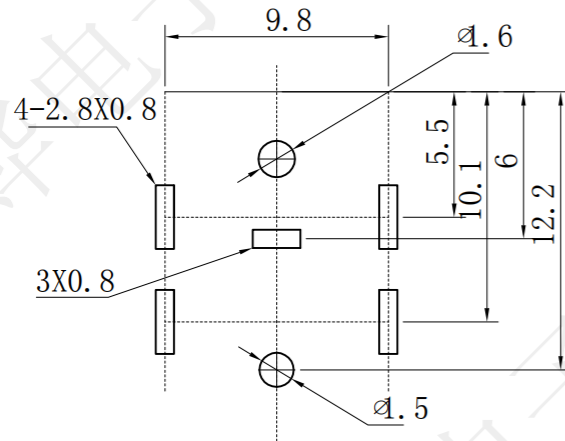

SCHEMATIC



6	定位	1	磷铜65=0.35	
5	插针	1	H59黄铜棒	镀金
4	外壳	1	H62黄铜带T=0.4	清洗
3	面板	1	H65磷铜带T=0.2	铜锡
2	弹片	1	磷铜65=0.35	铜锡
1	底座	1	PPA	(黑)
序号	名称	数量	材料	镀涂



Series Name :

DC-007B带柱

Product Name :

Part NO:

DCY19097	DC-007B带柱 针2.0
DCY19098	DC-007B带柱 针2.5
料号	规格

TOLERANCE	
X.X ±0.30	X.* ± 2*
.XX ±0.20	.X* ± 1*
.XXX ±0.10	.XX* ±0.5*
UNITS	mm

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞



SCALE
1:1

SHEET
1/1

REV.
A1