

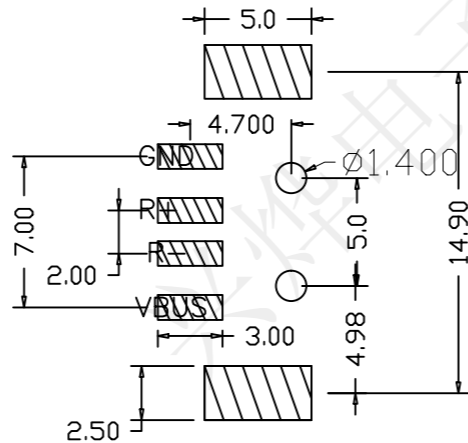


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

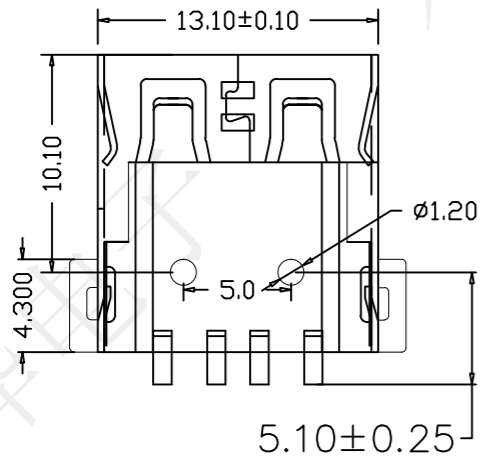


Specification:
 Current rating:DC 1.5A 30V
 Dielectric withstanding voltage: 500 V(ac) for 1 min.
 Contact resistance: 30 mΩ Max.
 Insulation resistance: 100 MΩ Min.
 Total mating force: 3.57 Kgf Max.
 Total unmating force: 1.0 Kgf Min.
 Temperature range: -30°C~80°C

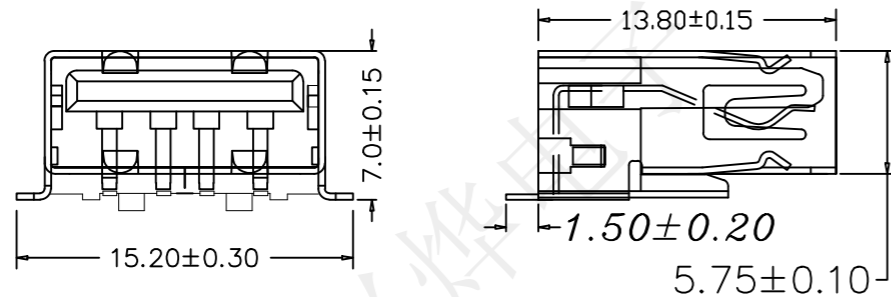

受控文件

3	Shell	1PCS	iron alloy	t=0.3mm
2	Contacts	4PCS	copper alloy	t=0.25mm
1	Housing	1PCS	LCP	UL 94-V0
No.	Pare Name	Number	Material	Remarks

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd		TOLERANCE			
		X.X	±0.30	X.°	±2°
		.XX	±0.20	X°	±1°
		.XXX	±0.10	.XX°	±0.5°
		UNITS	mm		

Series Name :		
Product Description :		
AF全贴带柱1.2米黄色LCP平口铁		
Part NO: USBG48089		
	SCALE	SHEET
	1:1	1/1
	REV.	A1

APPD: 陈爱光
 CHED: 施立敏
 DRAW: 马洪飞