




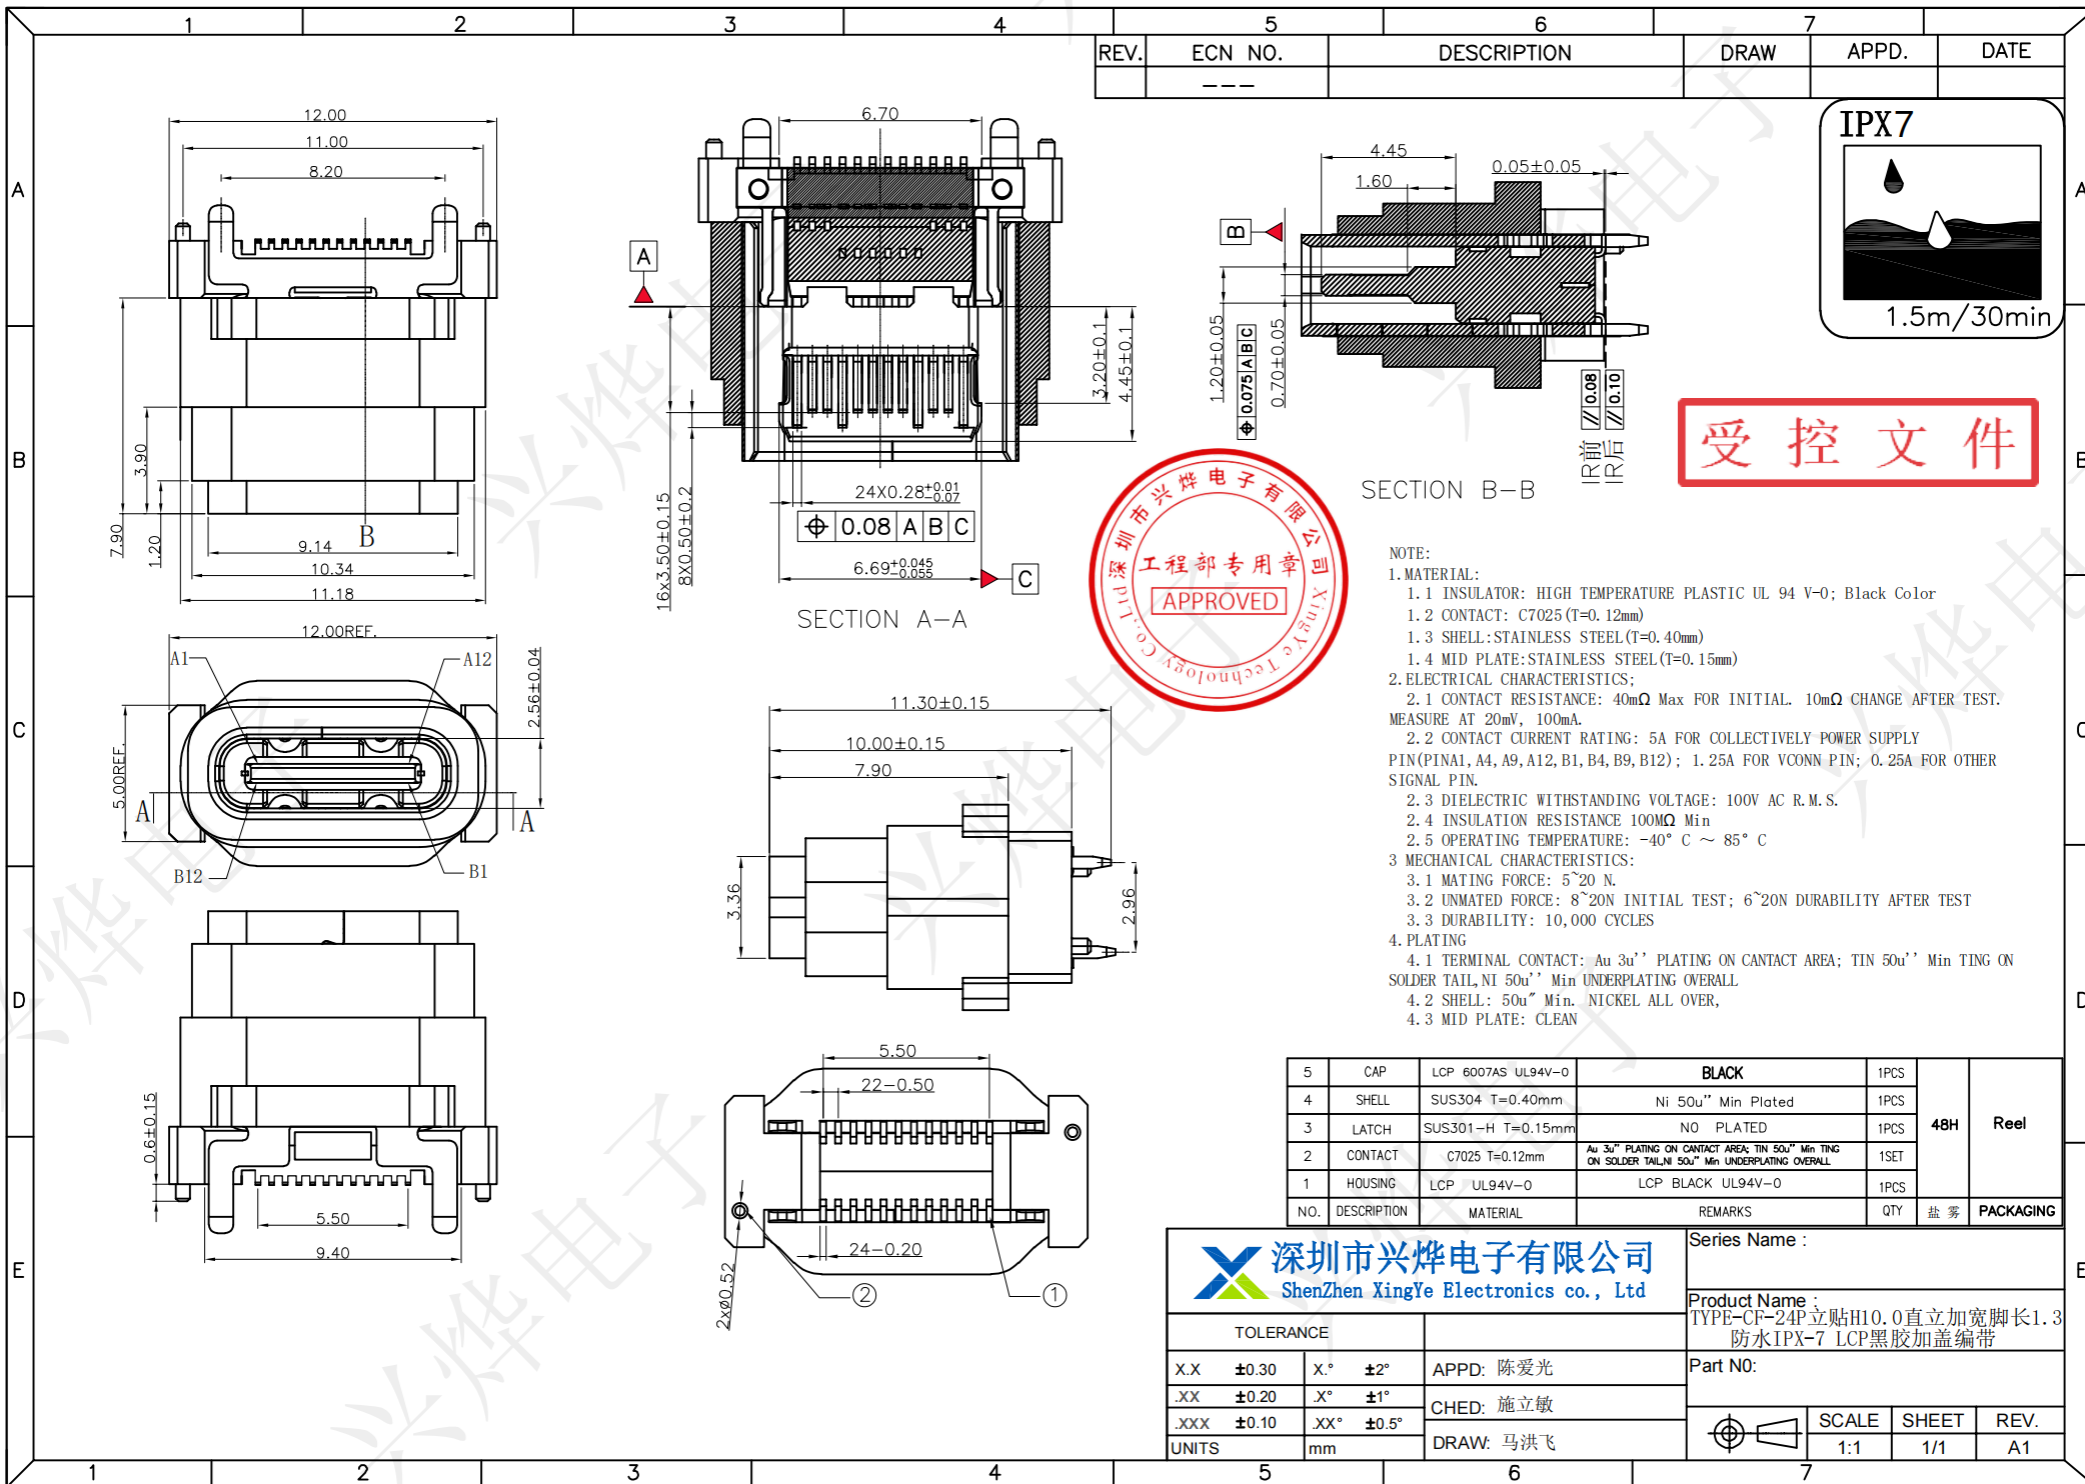


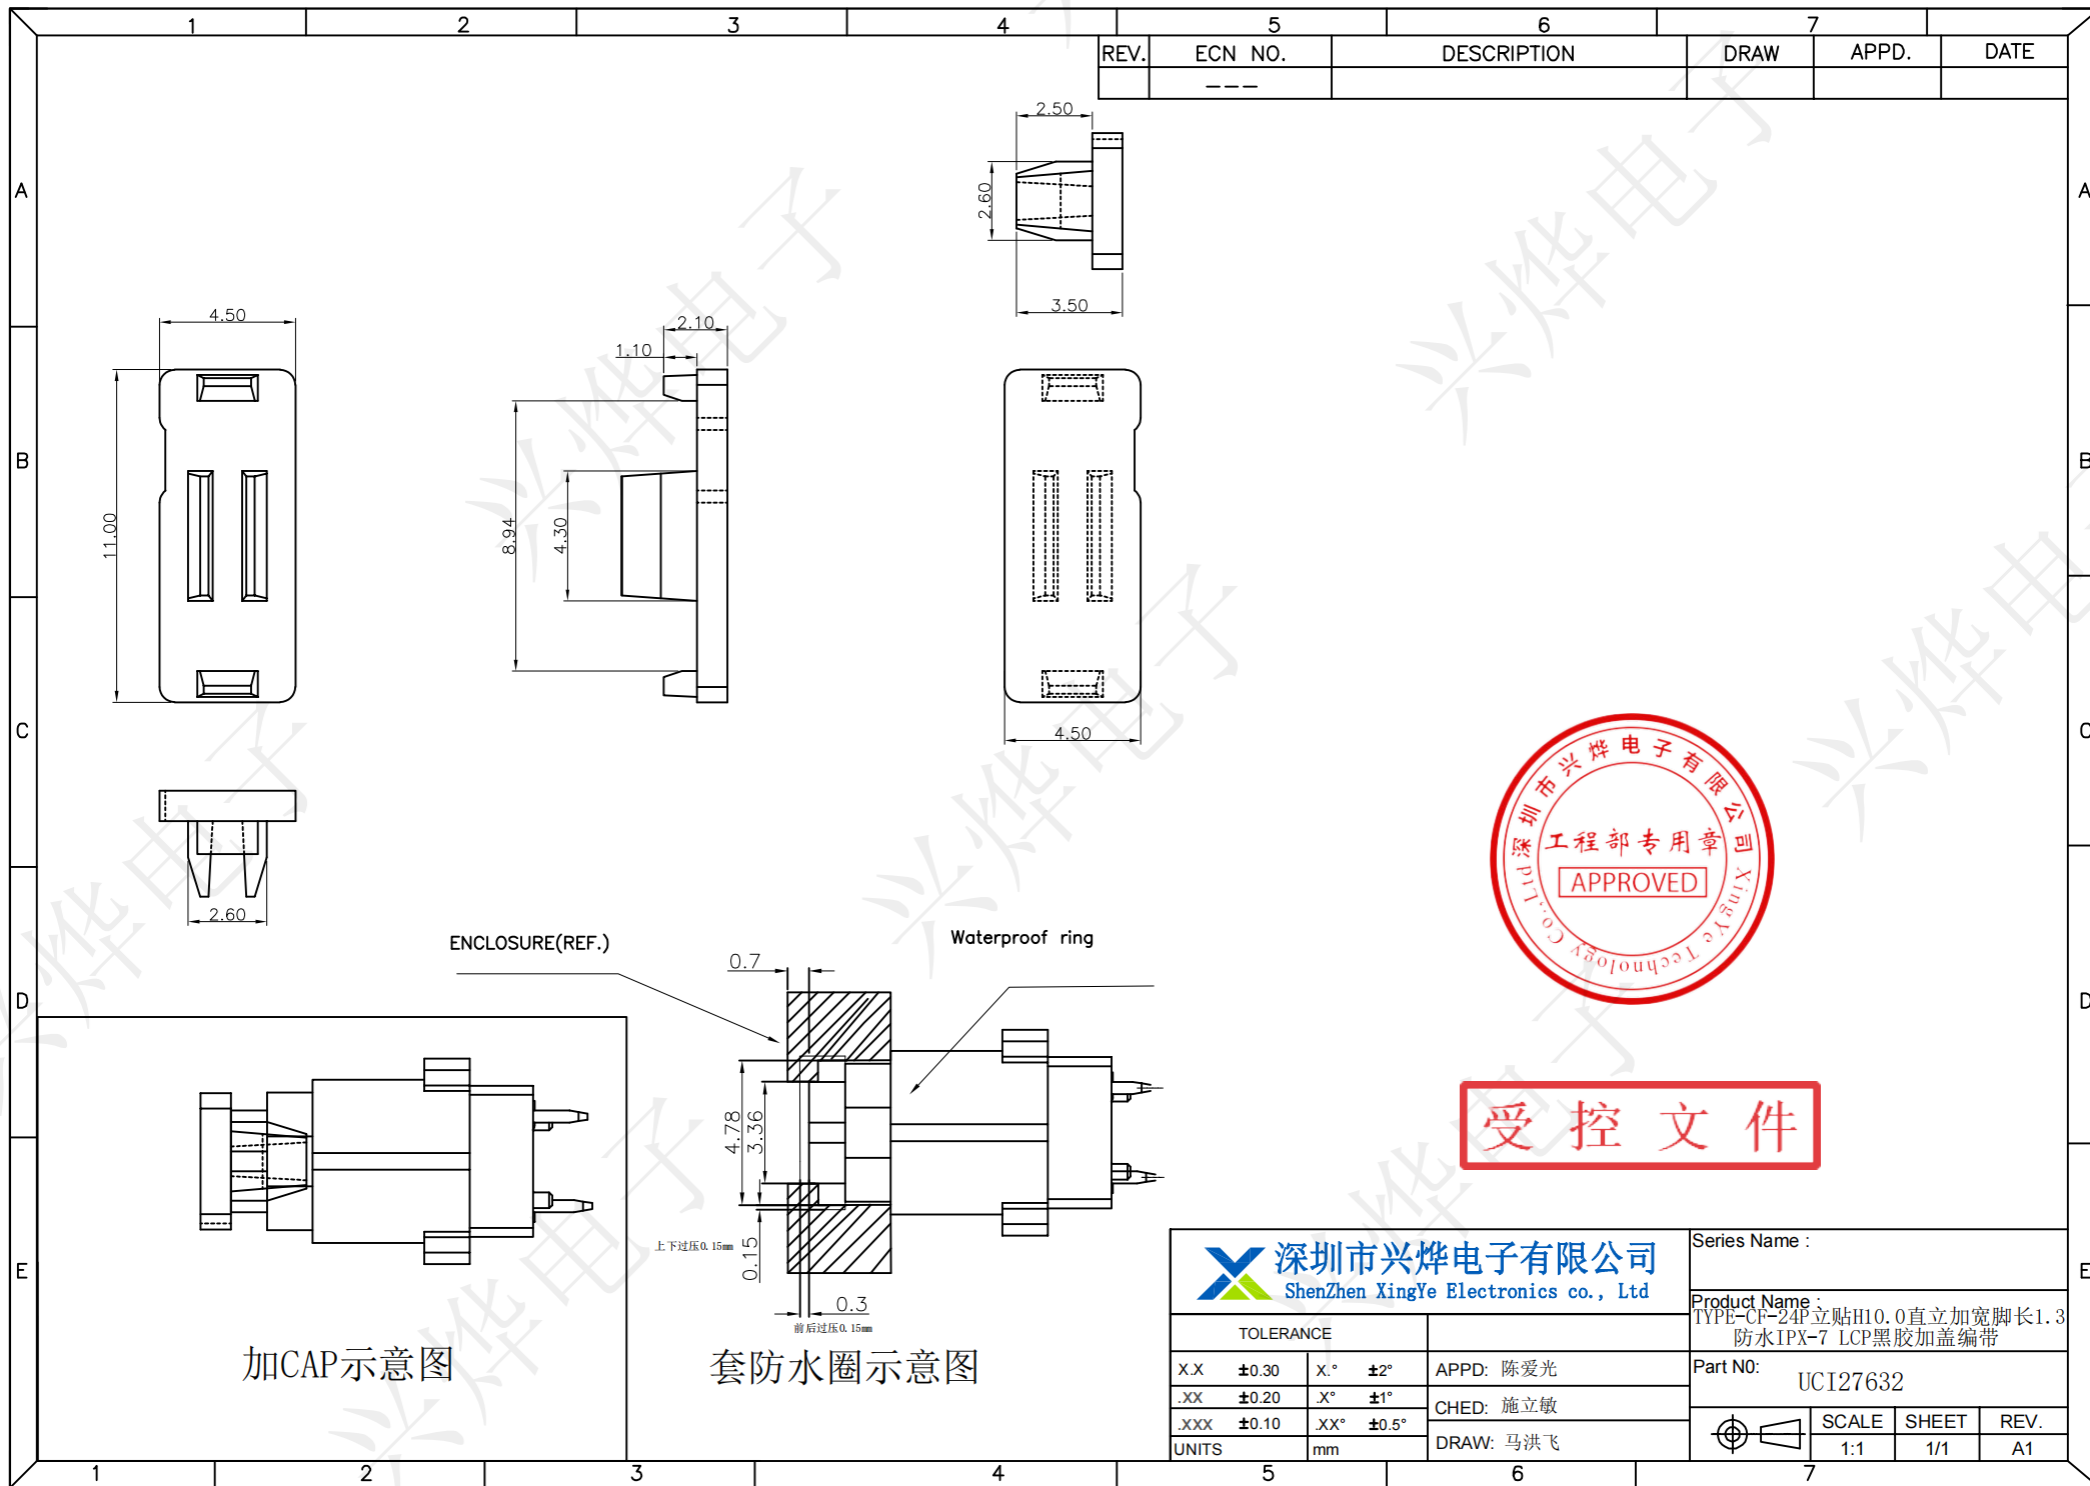

加防水圈示意图

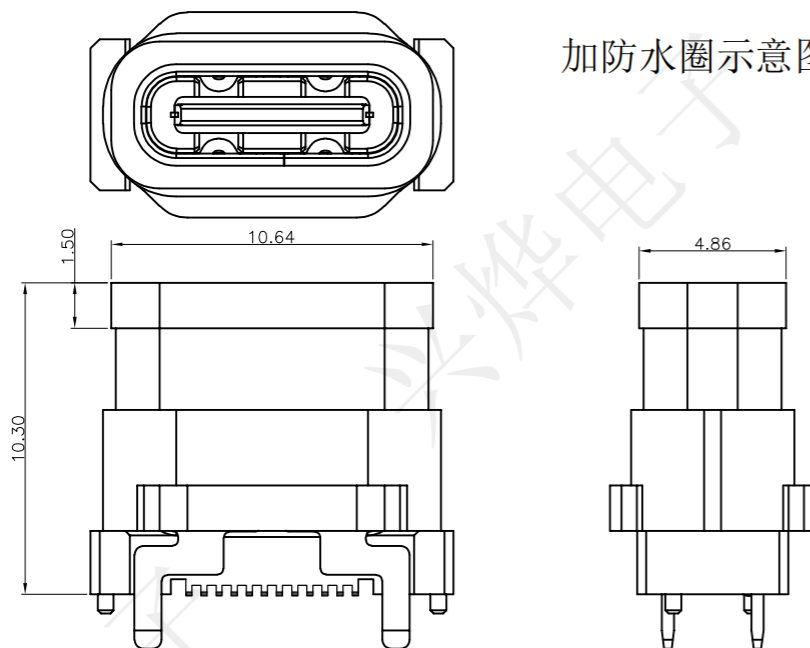


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
---	---	---	---	---	---

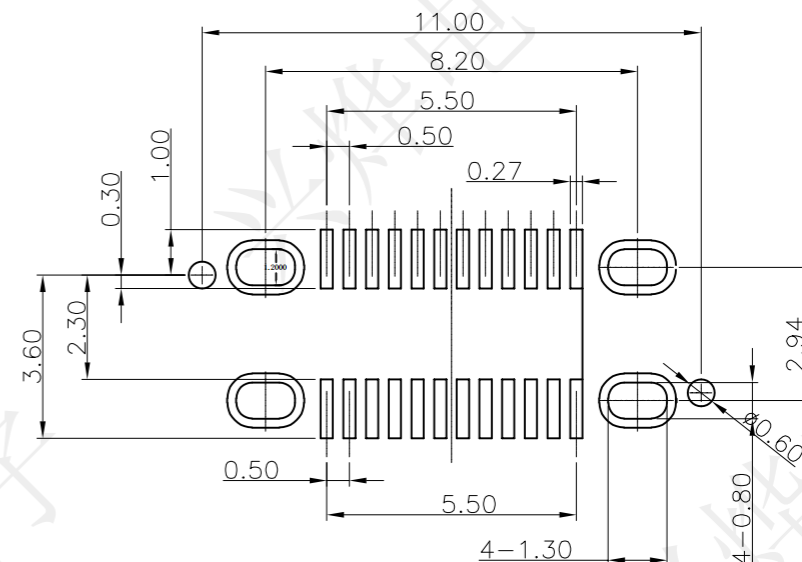

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

USB TYPE C PLUG

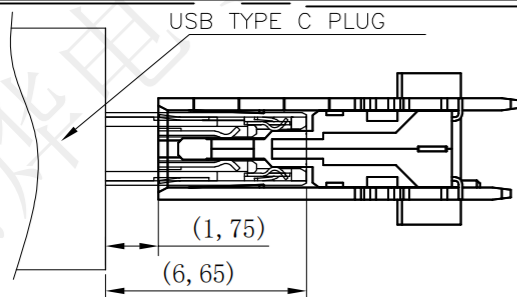

受控文件

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A12	GND	Ground return	B1	GND	Ground return

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE			
.X.X	± 0.30	X°	$\pm 2^\circ$
.XX	± 0.20	X°	$\pm 1^\circ$
.XXX	± 0.10	.XX°	$\pm 0.5^\circ$
UNITS	mm		

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞



Series Name :

Product Name :
TYPE-CF-24P立贴H10.0直立加宽脚长1.3
防水IPX-7 LCP黑胶加盖编带

Part NO: UCI27632



SCALE	SHEET	REV.
1:1	1/1	A1

