

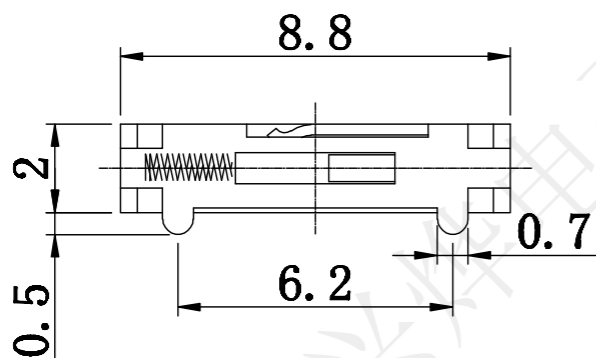




REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

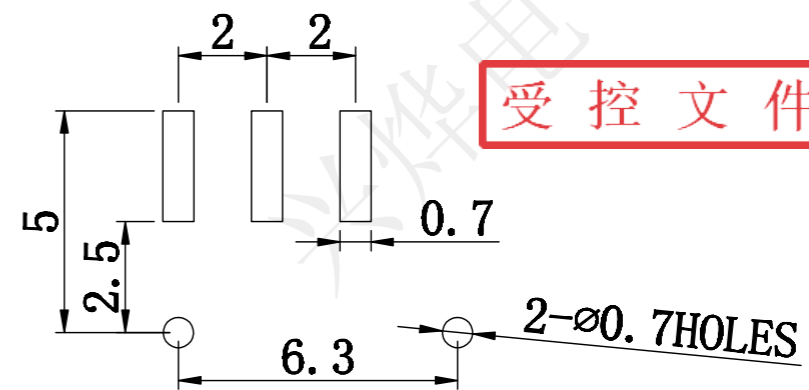

TRAVEL 2

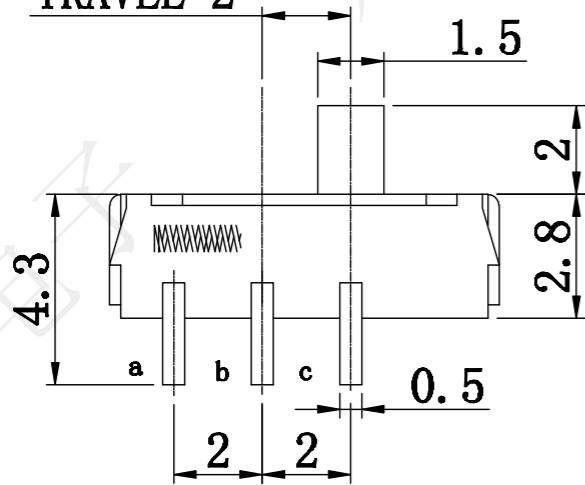

P. C. B LAYOUT DIMENSION

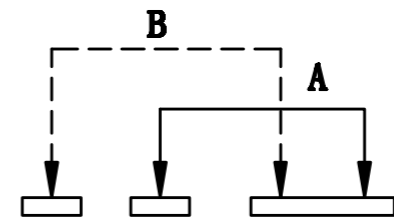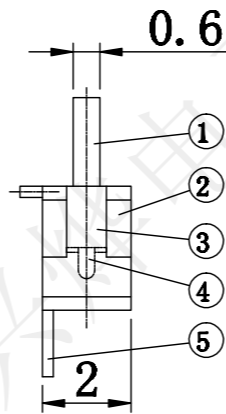

CIRCUIT



NO	项 目	参 数
1	额定电流	0.1A 12V DC
2	接触电阻	≤ 80mΩ
3	按 力	200±50gf
4	行 程	1.5±0.1mm
5	绝缘电阻	>100MΩ
6	抗电强度	250V 50Hz 1Min
7	寿 命	10,000 cyc

5	TERMINAL a, b, c	C2680	3	Ag
4	CONTACT	C5210	1	Ag
3	COVER	SUS	1	NATURAL
2	BOTTOM	PA46	1	BLACK
1	STEM	PA46	1	BLACK
NO.	PARTS	MATERIAL	QTY.	FINISHING

深圳市兴烨电子有限公司

ShenZhen XingYe Electronics co., Ltd

TOLERANCE			
X.X	±0.30	X.*	± 2'
.XX	±0.20	.X*	± 1'
.XXX	±0.10	.XX*	±0.5'
UNITS	mm		

Series Name :		
Product Prescription : MSK-12D18C偏三左复位200G		
Part NO: SKL20046		
	SCALE 1:1	SHEET 1/1
	REV. A1	

APPD: 陈爱光
 CHED: 施立敏
 DRAW: 马洪飞