


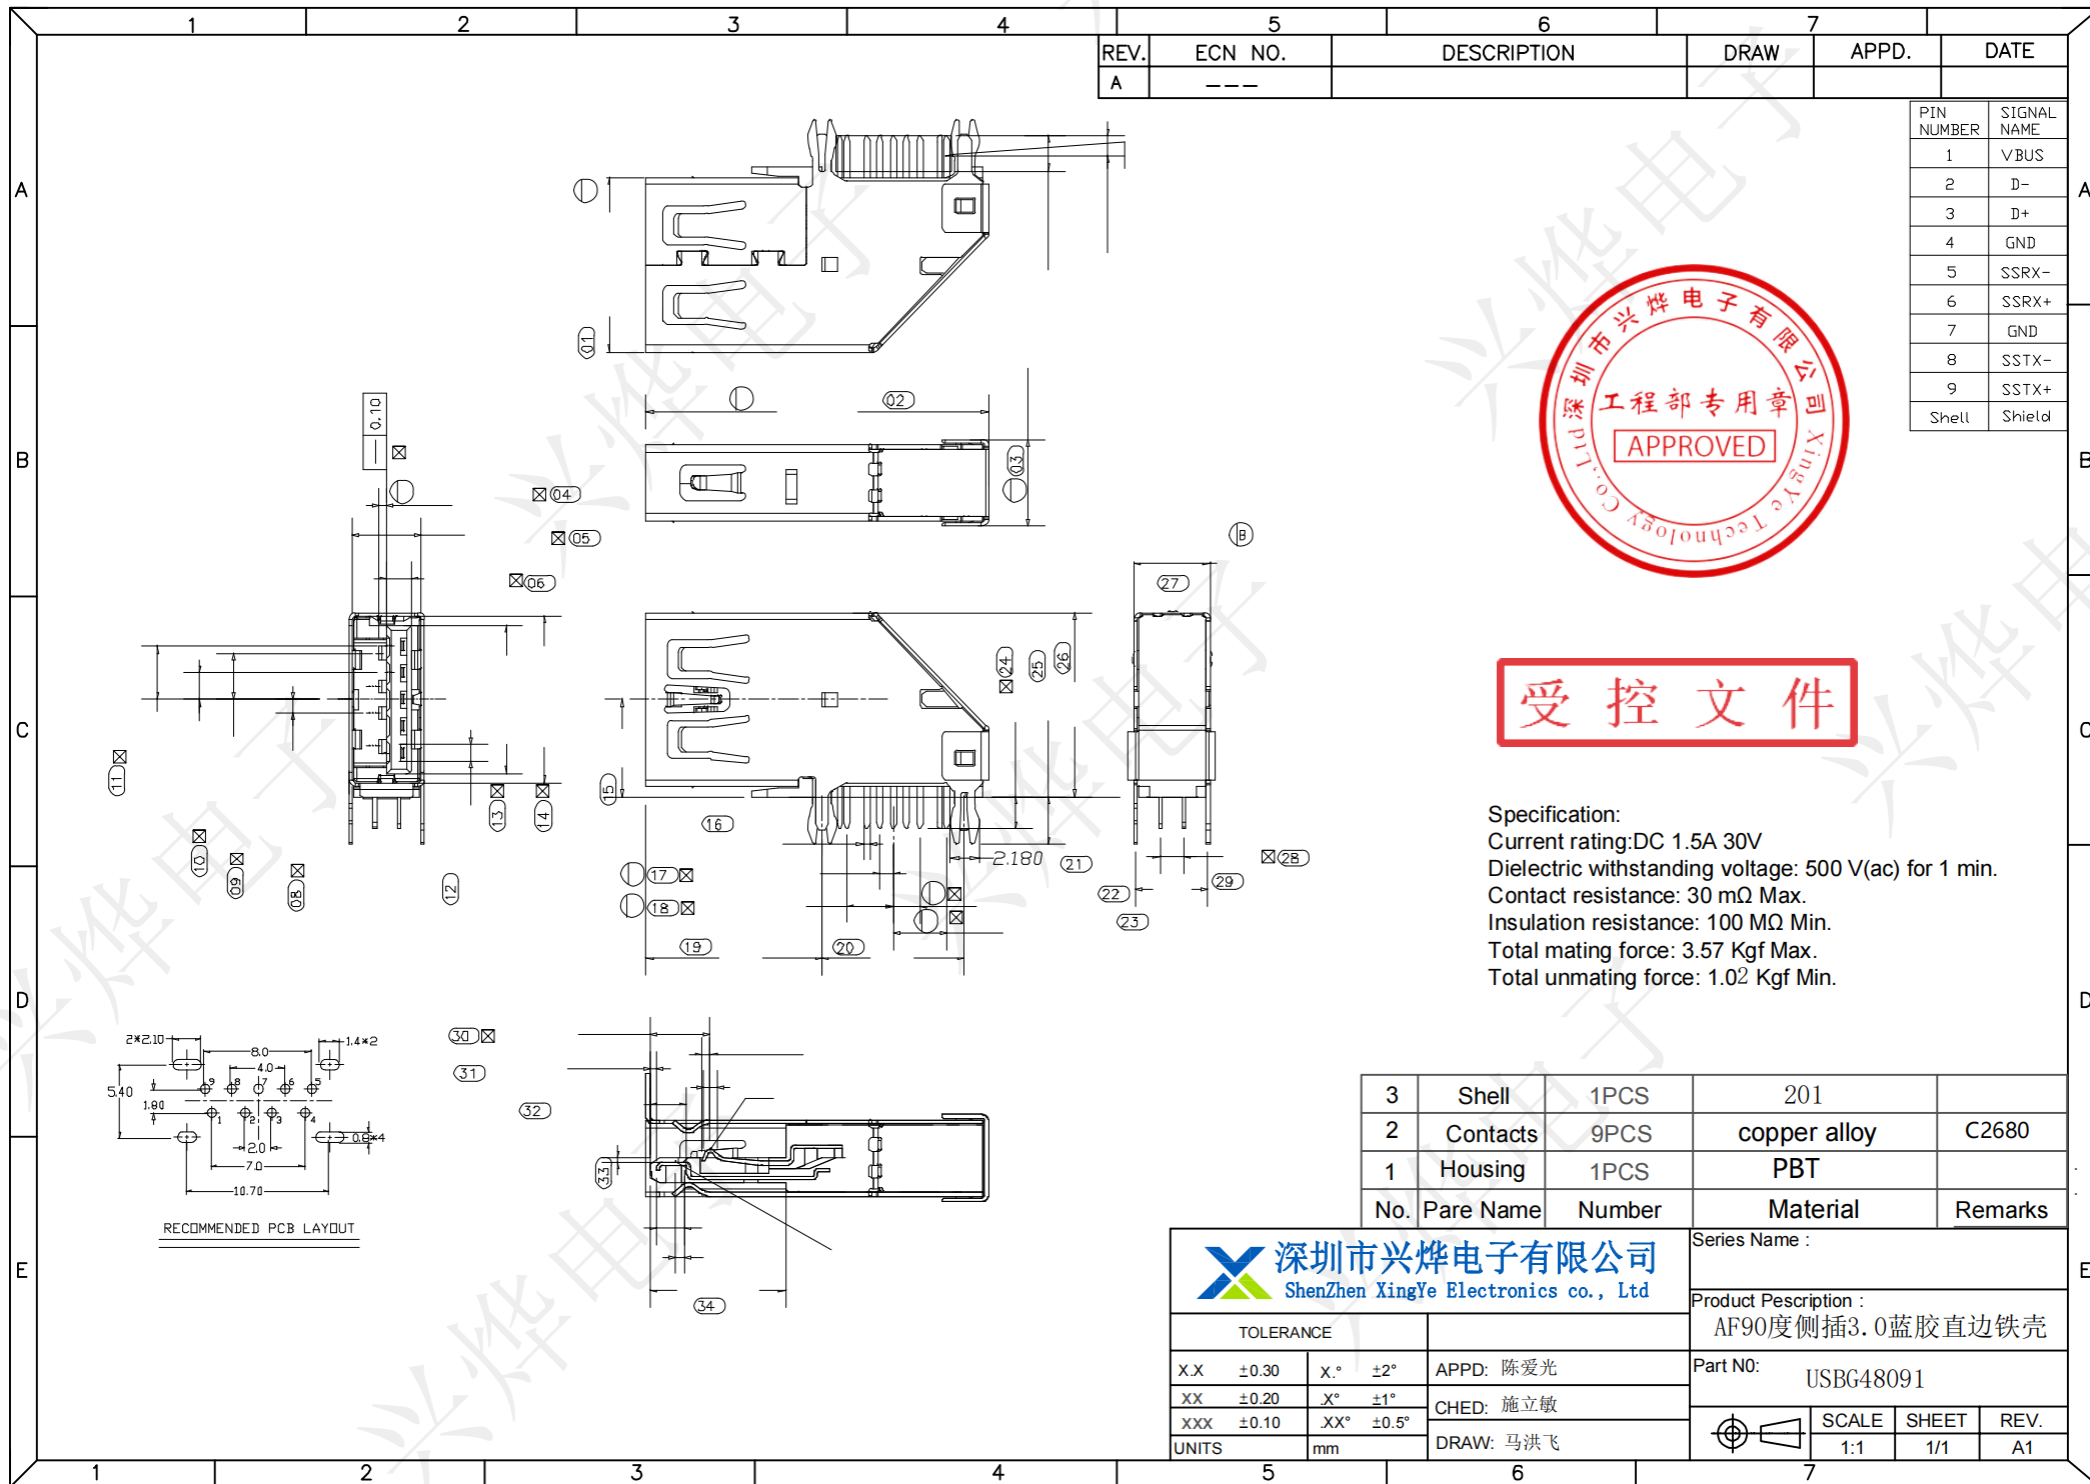

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND
8	SSTX-
9	SSTX+
Shell	Shield

受控文件

Specification:
Current rating:DC 1.5A 30V
Dielectric withstanding voltage: 500 V(ac) for 1 min.
Contact resistance: 30 mΩ Max.
Insulation resistance: 100 MΩ Min.
Total mating force: 3.57 Kgf Max.
Total unmating force: 1.02 Kgf Min.

3	Shell	1PCS	201	
2	Contacts	9PCS	copper alloy	C2680
1	Housing	1PCS	PBT	
No.	Pare Name	Number	Material	Remarks

 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd		Series Name :		
		Product Description : AF90度侧插3.0蓝胶直边铁壳		
		Part NO: USBG48091		
TOLERANCE		APPD: 陈爱光		
X.X ±0.30		CHED: 施立敏		
XX ±0.20		DRAW: 马洪飞		
XXX ±0.10				
UNITS	mm			
			SCALE 1:1	SHEET 1/1
		REV. A1		