

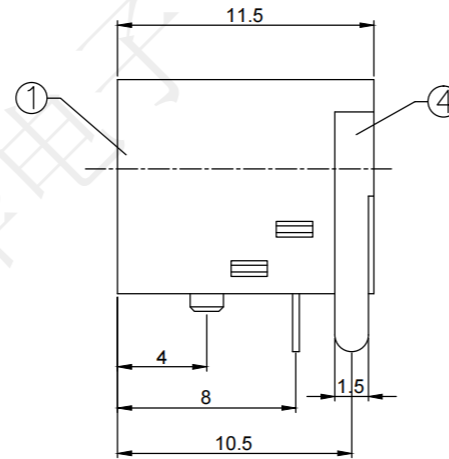


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				


PIN	Ø2.0	Ø2.5
APPD.		

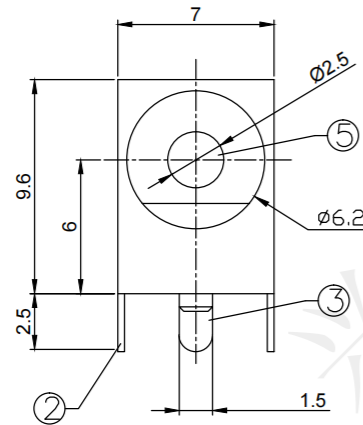

P.C.B
LAYOUT
VIEW

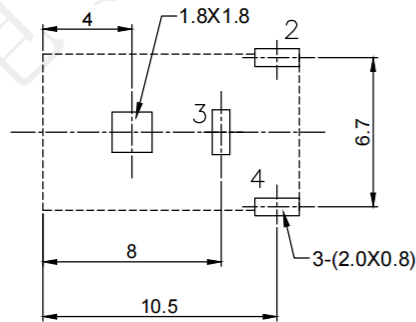

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

受控文件



5	PIN	1	H62 BRASS(ROHS)	Sn-Plating(ROHS)
4	FLAT PIECE	1	H62 BRASS(ROHS)	Ag-Plating(ROHS)
3	SPRING PIECE	1	C5191(ROHS)	Ag-Plating(ROHS)
2	CURVE PIECE	1	H62 BRASS(ROHS)	Ag-Plating(ROHS)
1	HOUSING	1	PPA(ROHS)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



Series Name :			
Product Name : DC-036三脚插帶柱			
Part NO:			
	SCALE	SHEET	REV.
	1:1	1/1	A1

DCY29109	DC-036三脚插带柱针2.5
DCY29108	DC-036三脚插带柱针2.0
料号	型号

TOLERANCE	
X.X ± 0.30	X.* $\pm 2^*$
.XX ± 0.20	.X* $\pm 1^*$
.XXX ± 0.10	.XX* $\pm 0.5^*$
UNITS	mm

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞