


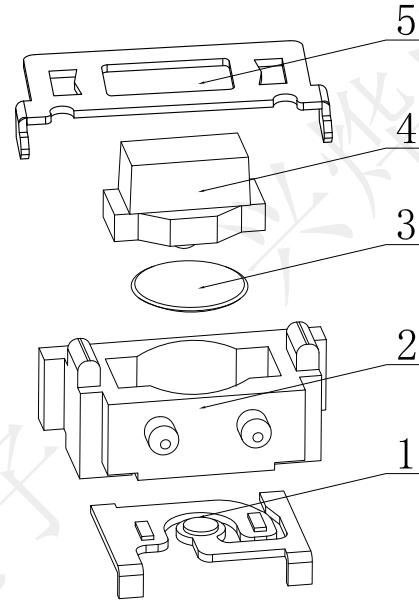

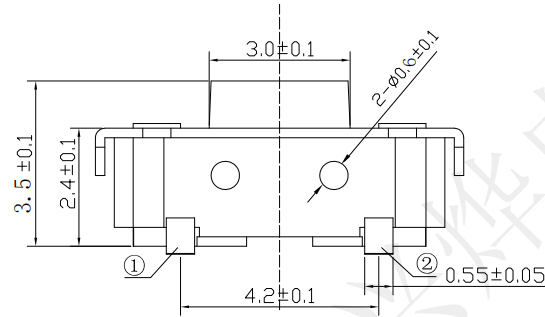



B: 0.6±0.2


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



受控文件

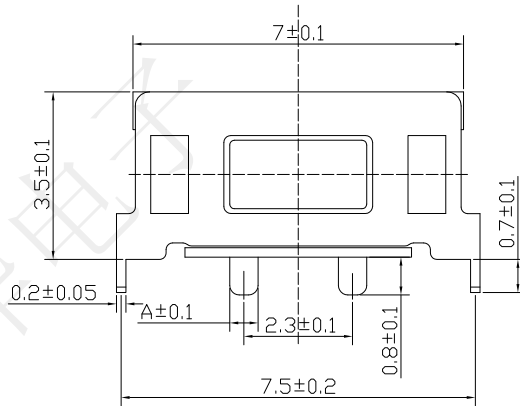

CIRCUIT DIAGRAM

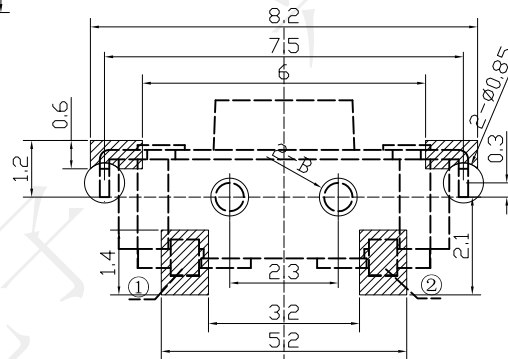

P.C.B MOUNTING PATTERN DIMENSION

the following soldering are recommended
for reflow soldering



SPECIFICATION:
Operating temperature:-25℃~70℃
Rated loading:DC 12V 50mA
Contact resistance:100mΩ Max
Insulation resistance:100MΩ Min
Withstanding voltage:AC 250V (50Hz) /min
Operating force:260±50gf Max
Electrical Life: 30000 cycles

⑤	盖板	1PCS	黄铜	电镀: 银
④	按钮	1PCS	硅胶	蓝色
③	簧片	1PCS	不锈钢	银色
②	底座	1PCS	LCP	白色
①	卡件	1PCS	黄铜	电镀: 银
序号	名称	数量	材料	备注

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :


Product Description :

3*6*3.5侧按带支架0.6柱 白色蓝硅胶260G编带

Part N0:

TSZ22297

TOLERANCE		APPD: 陈爱光
XX	±0.30	
XX	±0.20	CHED: 施立敏
.XXX	±0.10	
UNITS	mm	DRAW: 马洪飞



SCALE	SHEET	REV.
1:1	1/1	A1