

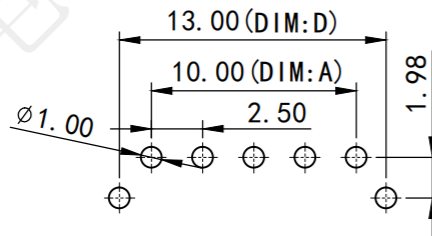
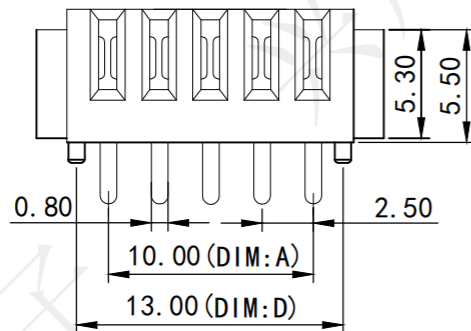


| REV. | ECN NO. | DESCRIPTION | DRAW | APPD | DATE |
|------|---------|-------------|------|------|------|
| A    | ---     |             |      |      |      |

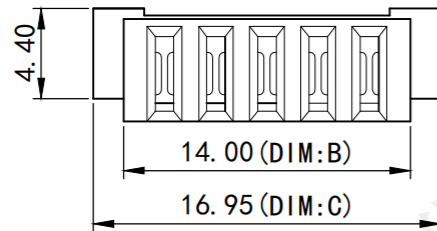

Recommended P.C.B Layout  
Layout Tolerance=+/-0.05mm

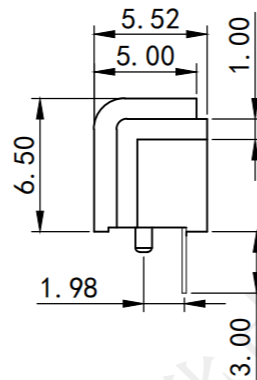

Specification  
Current Rating: 5A  
Instant Current: 7A  
Contact Resistance: 30mΩ  
Insulation Resistance: 100MΩ  
Dielectric Voltage: 500V  
Operdting Temperature: -40° ~105°

受控文件

| 料号       | No:of pins | Dimension |        |        |        |
|----------|------------|-----------|--------|--------|--------|
|          |            | DIM. A    | DIM. B | DIM. C | DIM. D |
| BCN10017 | 02         | 2.50      | 6.50   | 9.45   | 5.50   |
| BCN10018 | 03         | 5.00      | 9.00   | 11.95  | 8.00   |
| BCN10019 | 04         | 7.50      | 11.50  | 14.45  | 10.50  |
| BCN10020 | 05         | 10.00     | 14.00  | 16.95  | 13.00  |
| BCN10021 | 06         | 12.50     | 16.50  | 19.45  | 15.50  |
| BCN10022 | 07         | 15.00     | 19.00  | 21.95  | 18.00  |
| BCN10023 | 08         | 17.50     | 21.50  | 24.45  | 20.50  |
| BCN10024 | 09         | 20.00     | 24.00  | 26.95  | 23.00  |
| BCN10025 | 10         | 22.50     | 26.50  | 29.45  | 25.50  |
| BCN10026 | 11         | 25.00     | 29.00  | 31.95  | 28.00  |
| BCN10027 | 12         | 27.50     | 31.50  | 34.45  | 30.50  |
| BCN10028 | 13         | 30.00     | 34.00  | 36.95  | 33.00  |
| BCN10029 | 14         | 32.50     | 36.50  | 39.45  | 35.50  |
| BCN10030 | 15         | 35.00     | 39.00  | 41.95  | 38.00  |
| BCN10031 | 16         | 37.50     | 41.50  | 44.45  | 40.50  |



深圳市兴烨电子有限公司  
ShenZhen XingYe Electronics co., Ltd

Series Name :  
电池座B01F-C-S2-nP

Product Description :

Part NO:

APPD: 陈爱光

CHED: 施立敏

DRAW: 马洪飞



SCALE  
1:1

SHEET  
1/1

REV.  
A1

| NO. | PARTS            | MATERIAL        | QTY. | FINISHING |
|-----|------------------|-----------------|------|-----------|
| 2   | HOUSING          | NYLON 9T        | 1    | BLACK     |
| 1   | CONTACT TERMINAL | PHOSPHOR BRONZE | 5    | Au PLATED |

| TOLERANCE |       |      |       |
|-----------|-------|------|-------|
| X.X       | ±0.30 | X.°  | ±2°   |
| XX        | ±0.20 | .X°  | ±1°   |
| XXX       | ±0.10 | .XX° | ±0.5° |
| UNITS     | mm    |      |       |