

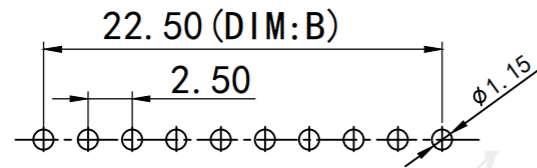
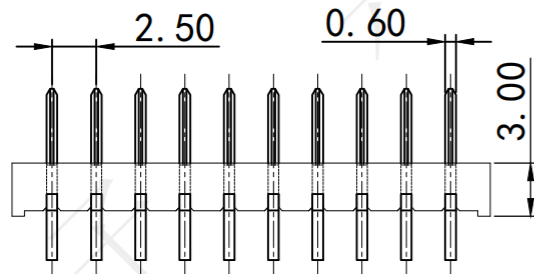


REV.	ECN NO.	DESCRIPTION	DRAW	APPD	DATE
A	---				

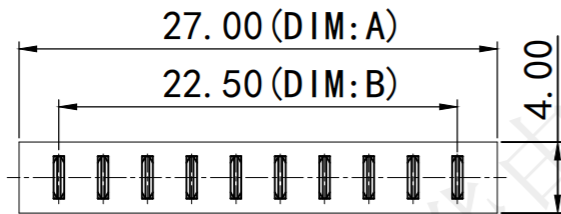

Recommended P. C. B Layout
Layout Tolerance=+/-0.05mm

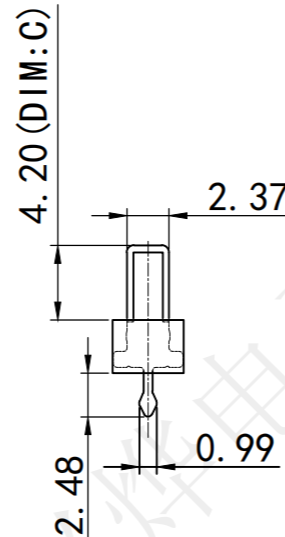

Specification
Current Rating : 5A
Instant Current : 7A
Contact Resistance : 30m Ω
Insulation Resistance : 100M Ω
Dielectric Voltage : 500V
Operdting Temperature : -40° ~105°

受控文件

料号	No. of Pins	Dimension	
		DIM. A	DIM. B
BCN10032	02	7.00	2.50
BCN10033	03	9.50	5.00
BCN10034	04	12.00	7.50
BCN10035	05	14.50	10.00
BCN10036	06	17.00	12.50
BCN10037	07	19.50	15.00
BCN10038	08	22.00	17.50
BCN10039	09	24.50	20.00
BCN10040	10	27.00	22.50
BCN10041	11	29.50	25.00
BCN10042	12	32.00	27.50
BCN10043	13	34.50	30.00
BCN10044	14	37.00	32.50
BCN10045	15	39.50	35.00
BCN10046	16	42.00	37.50

DIM:C (刀片长)
4.20
5.80
6.00
7.00
8.00
8.50
9.00
9.50

2	HOUSING	NYLON 9T	1	BLACK
1	CONTACT TERMINAL	C2680	10	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

		深圳市兴烨电子有限公司	
		ShenZhen XingYe Electronics co., Ltd	
TOLERANCE			
X.X	±0.30	X.°	±2°
XX	±0.20	.X.°	±1°
XXX	±0.10	.XX.°	±0.5°
UNITS	mm		

Series Name :		电池公座B01M-R1-nP		
Product Description :				
Part NO:				
	SCALE	SHEET	REV.	
	1:1	1/1	A1	