
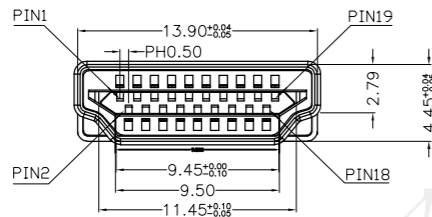
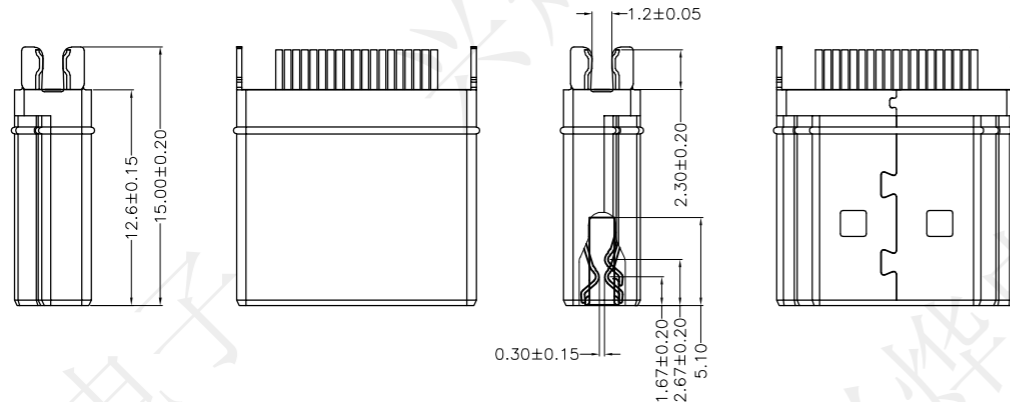


REV.	ECN NO.	DESCRIPTION
A	---	

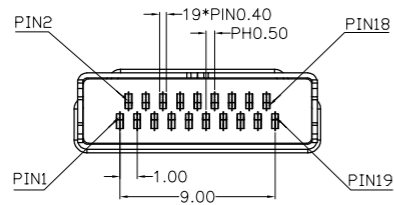


NOTE :

1.SPECIFICATION:

- 1.1.CURRENT RATING: 0.5 Amp Max.
- 1.2.VOLTAGE RATING: 40 V ac(r.m.s) Max.
- 1.3.CONTACT RESISTANCE: 10m ohms Max.r
- 1.4.INSULATION RESISTANCE:100M ohms Min
- 1.5.DIELECTRIC WITHSTANDING VOLTAGE:
AC 500V Min. (for 1 minute)

2.MECHANICAL

- 2.1 INSERTION FORCE: 4.5KGF MAXMUM
- 2.1 WITHDRAWAL FORCE: 1.0KGF MINIMUM; 4.C
MAXMUM

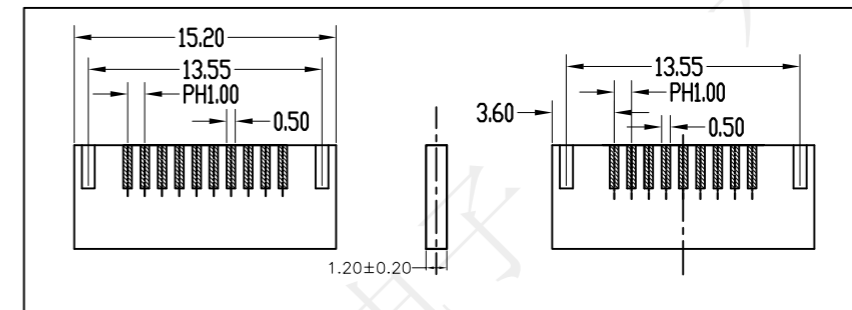

受控文件

SHELL	H65-H SPCC	1	GOLD PLATED OVER G/F, PLATED OVER 50u" NI min.
9Pin CONTACT	C5191	9	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDE: AREA:100u" MIST TIN PLATED OVER 50u" NI min.
10Pin CONTACT	C5191	10	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDE: AREA:100u" MIST TIN PLATED OVER 50u" NI min.
BACK INSERT HO:SING	LCP	1	BLACK,UL 94V-0
HO:SING	LCP	1	BLACK,UL 94V-0
PART NAME	Mechanical	QTY	NOTE

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X	±0.30	X.° ±2°
.XX	±0.20	.X° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	

Series Name :		
Product Name :		
HDMI-08E-1.2带筋		
Part NO:		
HDMIT2014		
	SCALE	SHEET
	1:1	1/1
	REV.	A1