


P. C. B 布局
Recommended PCB Layout

- Remarks:
1. Rated current, Voltage: DC 12V 50mA
 2. Contact resistance: $\leq 100m\Omega$
 3. Insulation resistance: $\geq 100M\Omega$
 4. The intensity of operations: $160 \pm 50gf$
 5. Life requirements: 100,000次
 6. Withstand voltage: AC 250V 1分钟
 7. All materials comply with RoHS standards




线路图
Circuit Diagram

受控文件



5	Button	PA9T	1	Black
4	Paster	Polyimide	1	White
3	Shrapnel	SUS	2	Ag Plating
2	Housing	PA9T	1	Black
1	Terminal	Phosphor copper	2	Ag Plating
NO.	PART NAME	MATERIAL	QTY	FINISHING

		Series Name :							
		Product Name : 3x2x0.65贴片160G带外点U脚黄膜编带							
TOLERANCE		Part NO: TSH22313							
X.X ±0.30	X.° ±2°	APPD: 陈爱光	<table border="1"> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>A1</td> </tr> </table>	SCALE	SHEET	REV.	1:1	1/1	A1
SCALE	SHEET	REV.							
1:1	1/1	A1							
.XX ±0.20	.X° ±1°	CHEd: 施立敏							
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞							
UNITS	mm								

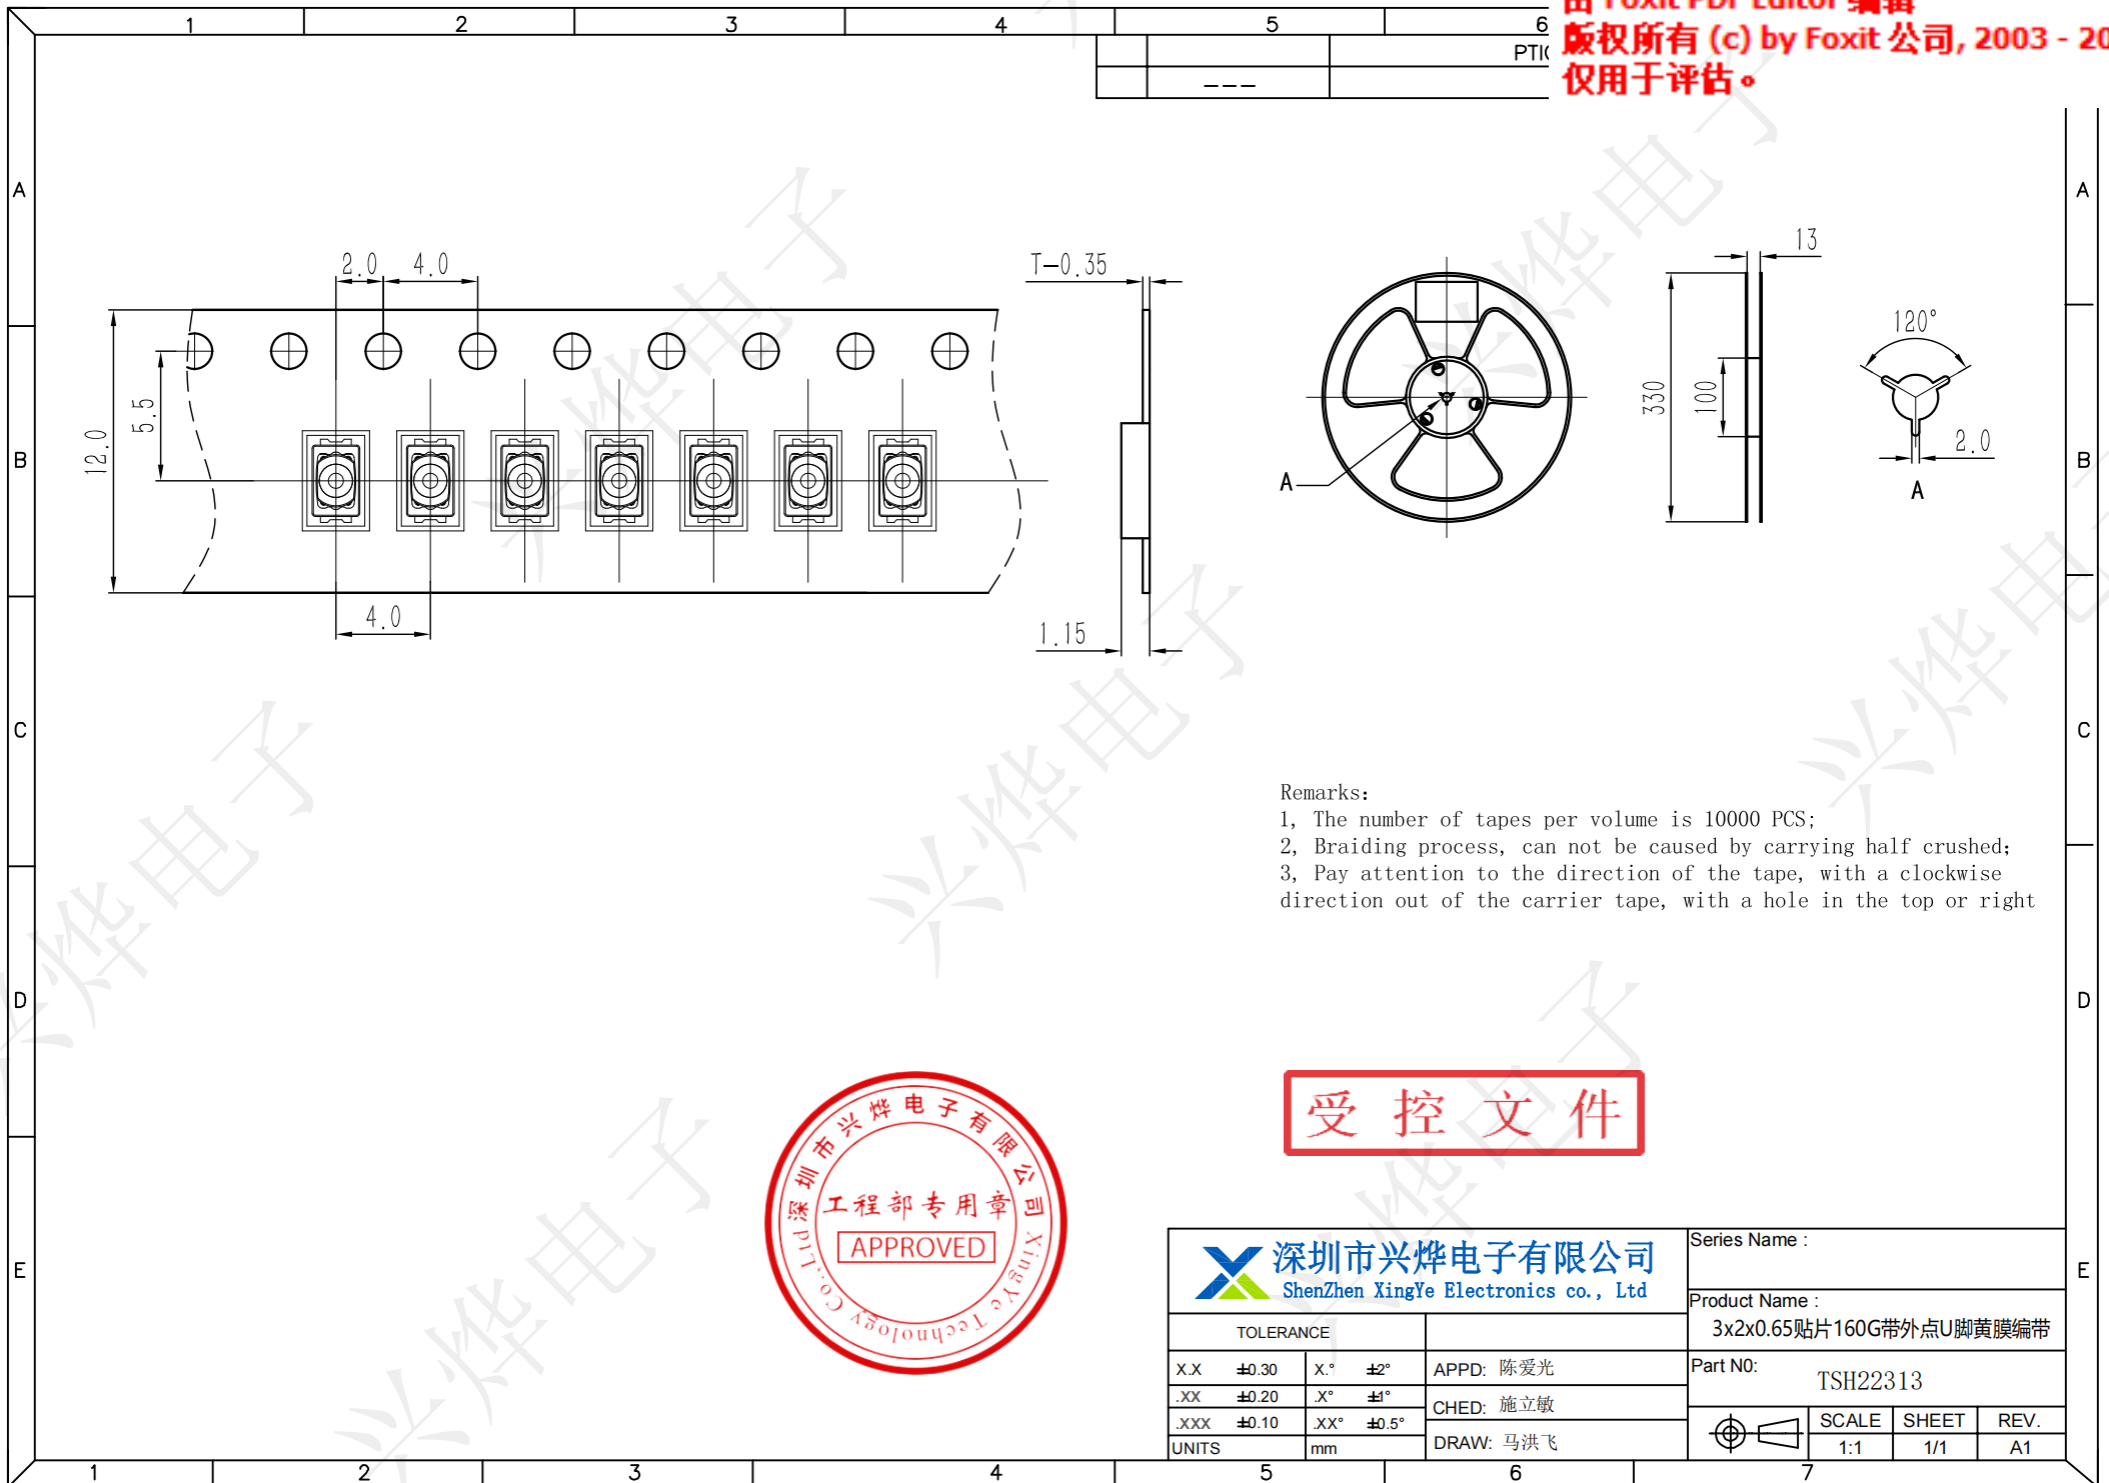

Remarks:

- 1, The number of tapes per volume is 10000 PCS;
- 2, Braiding process, can not be caused by carrying half crushed;
- 3, Pay attention to the direction of the tape, with a clockwise direction out of the carrier tape, with a hole in the top or right

受控文件



 深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd		Series Name :		
		Product Name : 3x2x0.65贴片160G带外点U脚黄膜编带		
TOLERANCE		Part NO: TSH22313		
.XX ±0.30	X.° ±2°	APPD: 陈爱光	 SCALE 1:1 SHEET 1/1 REV. A1	
.XX ±0.20	X.° ±1°	CHED: 施立敏		
.XXX ±0.10	XX° ±0.5°	DRAW: 马洪飞		
UNITS	mm			