

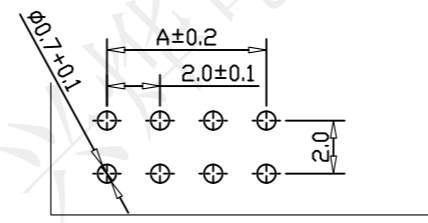
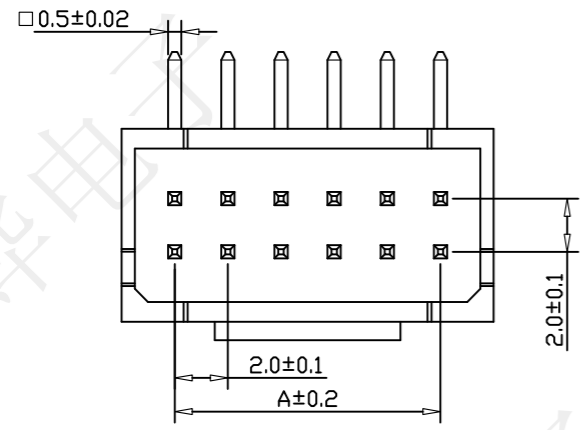


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

受控文件

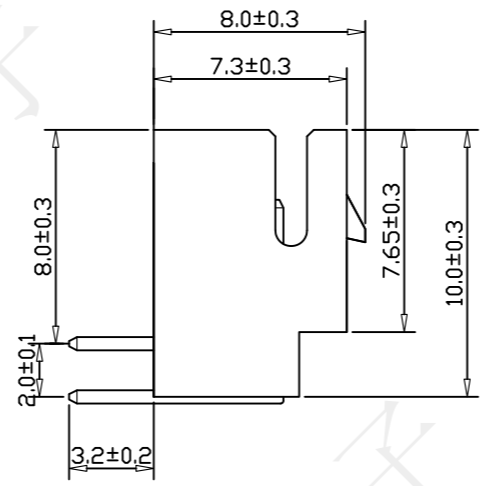

Operating temperature:-25℃~85℃
 Rated loading:2A 250V AC,DC
 Contact resistance:30mΩ Max
 Insulation resistance:1000MΩ Min
 Withstanding voltage:AC 1000V/min
 Material: PA66, UL94V-0
 PIN brass Tin-plated

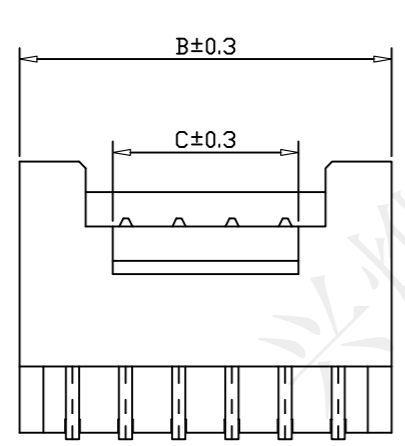

PCB LAYOUT

料号	孔位	尺寸(mm)		
		A	B	C
CZB25760	PHSD-2×2AW	2.00	6.00	3.00
CZB25761	PHSD-2×3AW	4.00	8.00	3.00
CZB25762	PHSD-2×4AW	6.00	10.00	3.00
CZB25763	PHSD-2×5AW	8.00	12.00	5.00
CZB25764	PHSD-2×6AW	10.00	14.00	7.00
CZB25765	PHSD-2×7AW	12.00	16.00	9.00
CZB25766	PHSD-2×8AW	14.00	18.00	11.00
CZB25767	PHSD-2×9AW	16.00	20.00	13.00
CZB25768	PHSD-2×10AW	18.00	22.00	15.00
CZB25769	PHSD-2×11AW	20.00	24.00	17.00
CZB25770	PHSD-2×12AW	22.00	26.00	19.00
CZB25771	PHSD-2×13AW	24.00	28.00	21.00
CZB25772	PHSD-2×14AW	26.00	30.00	23.00
CZB25773	PHSD-2×15AW	28.00	32.00	25.00
CZB25774	PHSD-2×22AW	42.00	46.00	39.00

深圳市兴烨电子有限公司
 ShenZhen XingYe Electronics co., Ltd

Series Name : PHSD-2*nAW

Product Name :

TOLERANCE		
XX ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	x° ±1°	CHEd: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Part NO:

	SCALE	SHEET	REV.
	1:1	1/1	A1