


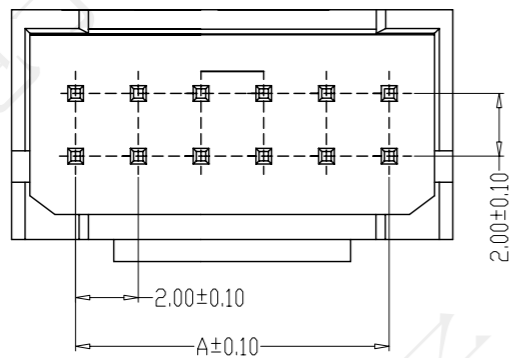


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

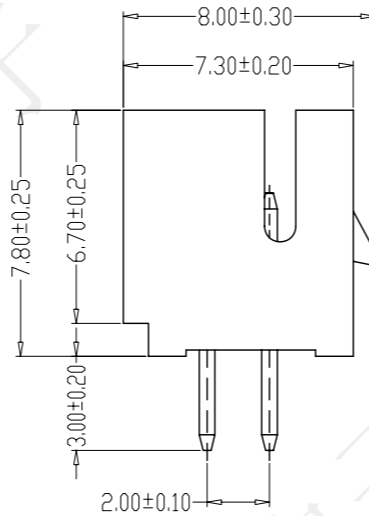

PCB LAYOUT

受控文件

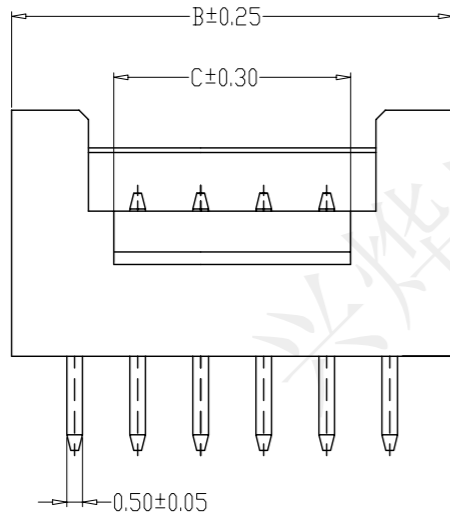

Operating temperature: -25°C~85°C  
 Rated loading: 3A 250V AC, DC  
 Contact resistance: 20mΩ Max  
 Insulation resistance: 1000MΩ Min  
 Withstanding voltage: AC 800V (50HZ)/min  
 Material: PA46, UL94V-0  
 PIN brass Tin-plated

CKTS	料号	尺寸		
		A	B	C
PHB-2*2A	CZB15375	2.00	6.00	3.00
PHB-2*3A	CZB15376	4.00	8.00	3.00
PHB-2*4A	CZB15377	6.00	10.00	3.00
PHB-2*5A	CZB15378	8.00	12.00	5.00
PHB-2*6A	CZB15379	10.00	14.00	7.00
PHB-2*7A	CZB15380	12.00	16.00	9.00
PHB-2*8A	CZB15381	14.00	18.00	11.00
PHB-2*9A	CZB15382	16.00	20.00	13.00
PHB-2*10A	CZB15383	18.00	22.00	15.00
PHB-2*11A	CZB15384	20.00	24.00	17.00
PHB-2*12A	CZB15385	22.00	26.00	19.00
PHB-2*13A	CZB15386	24.00	28.00	21.00
PHB-2*14A	CZB15387	26.00	30.00	23.00
PHB-2*22A	CZB15388	42.00	46.00	39.00

深圳市兴烨电子有限公司  
 Shenzhen XingYe Electronics co., Ltd

Series Name : PHB-2\*nA

Product Name :

TOLERANCE		
XX ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	x° ±1°	CHEd: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Part NO:

	SCALE	SHEET	REV.
	1:1	1/1	A1