

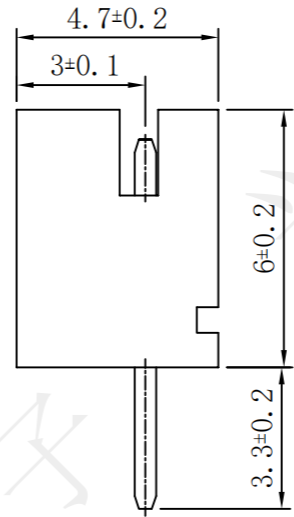
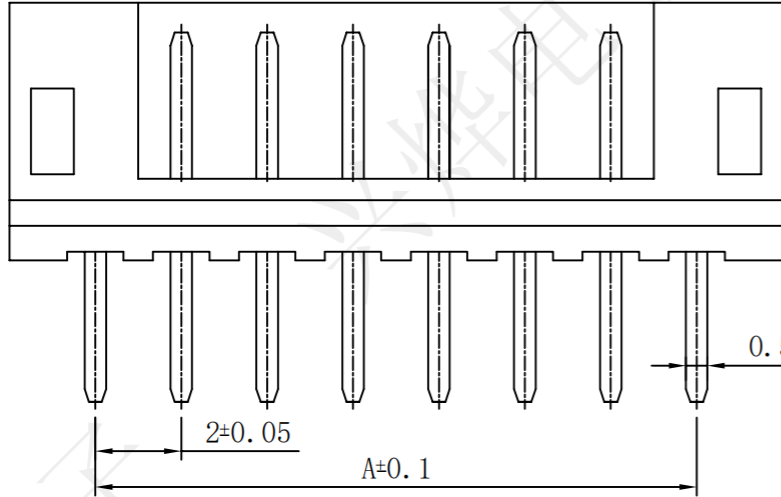


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

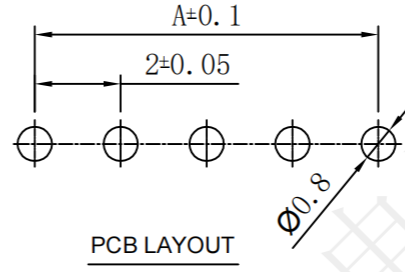

Operating temperature: -25 °C ~ 85 °C
 Rated loading: 2A 250V AC, DC
 Contact resistance: 10mΩ Max
 Insulation resistance: 1000MΩ Min
 Withstanding voltage: AC 800V (50HZ)/min
 Material: PA66
 PIN Brass Tin-plated

受控文件

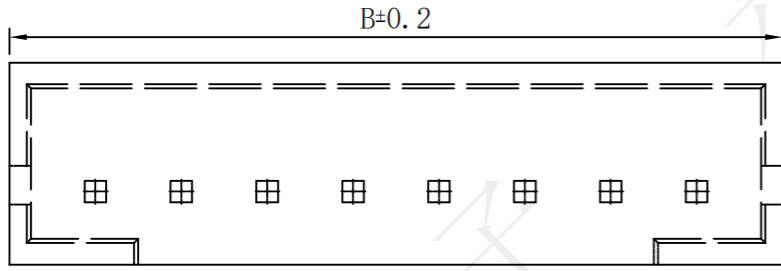

PIN数	料号	尺寸	
		A	B
2P	CZB15023	2.00	6.00
3P	CZB15024	4.00	8.00
4P	CZB15025	6.00	10.00
5P	CZB15026	8.00	12.00
6P	CZB15027	10.00	14.00
7P	CZB15028	12.00	16.00
8P	CZB15029	14.00	18.00
9P	CZB15030	16.00	20.00
10P	CZB15031	18.00	22.00
11P	CZB15032	20.00	24.00
12P	CZB15033	22.00	26.00
13P	CZB15034	24.00	28.00
14P	CZB15035	26.00	30.00
15P	CZB15036	28.00	32.00



深圳市兴烨电子有限公司
 ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
.XX ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	X.° ±1°	CHED: 施立敏
.XXX ±0.10	XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Series Name : PH-nA
 Product Name :
 Part NO:

SCALE	SHEET	REV.
1:1	1/1	A1