



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				


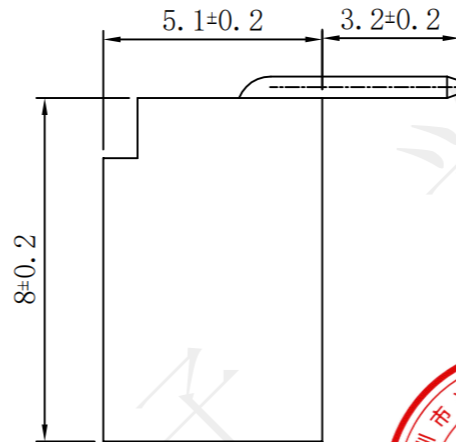


Operating temperature: -25°C~85°C
 Rated loading: 2A 250V AC, DC
 Contact resistance: 10mΩ Max
 Insulation resistance: 1000MΩ Min
 Withstanding voltage: AC 800V (50HZ)/min
 Material: PA66
 PIN Brass Tin-plated

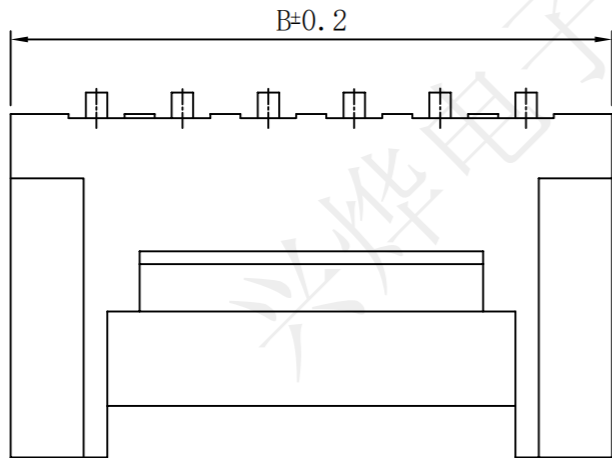

受控文件

PIN数	料号	尺寸	
		A	B
2P	CZB15093	2.00	6.00
3P	CZB15094	4.00	8.00
4P	CZB15095	6.00	10.00
5P	CZB15096	8.00	12.00
6P	CZB15097	10.00	14.00
7P	CZB15098	12.00	16.00
8P	CZB15099	14.00	18.00
9P	CZB15100	16.00	20.00
10P	CZB15101	18.00	22.00
11P	CZB15102	20.00	24.00
12P	CZB15103	22.00	26.00
13P	CZB15104	24.00	28.00
14P	CZB15105	26.00	30.00
15P	CZB15106	28.00	32.00

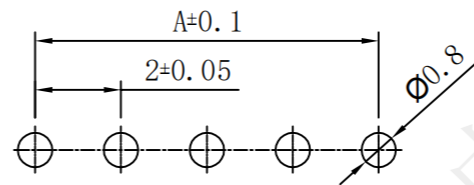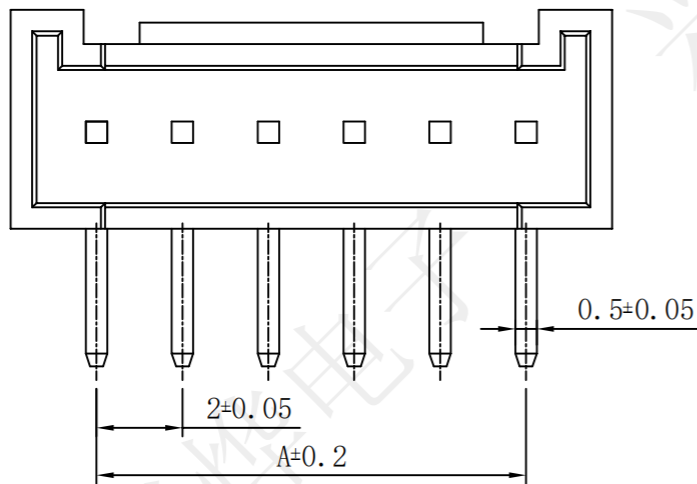

PCB LAYOUT

深圳市兴烨电子有限公司
 Shenzhen XingYe Electronics co., Ltd

TOLERANCE		
XX	±0.30	APPD: 陈爱龙
.XX	±0.20	CHEC: 施立敏
.XXX	±0.10	
UNITS	mm	DRAW: 马洪飞

Series Name : PH-nAW带扣

Product Name :

Part NO:

	SCALE	SHEET	REV.
	1:1	1/1	A1