





REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

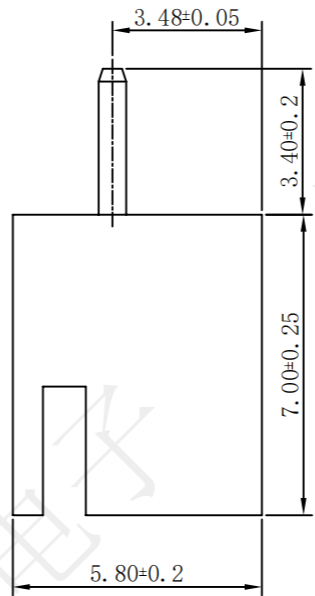

Operating temperature:-25℃~85℃  
 Rated loading:3A 250V AC,DC  
 Contact resistance:20mΩ Max  
 Insulation resistance:1000MΩ Min  
 Withstanding voltage:AC 1000V (50HZ)/min  
 Material: PA66  
 PIN brass Tin-plated

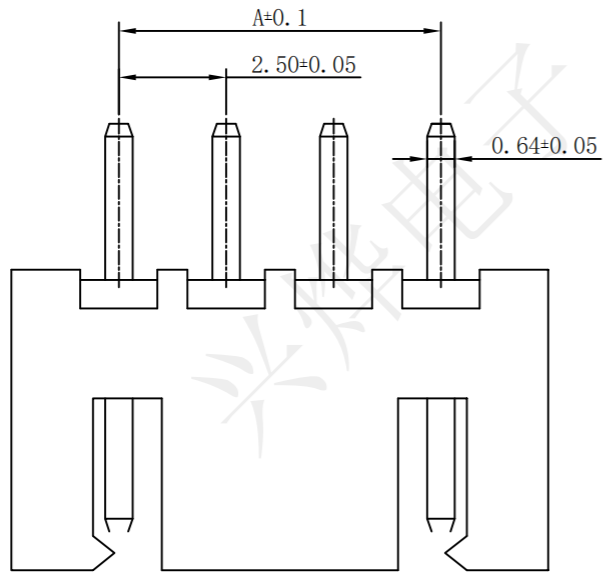

受控文件

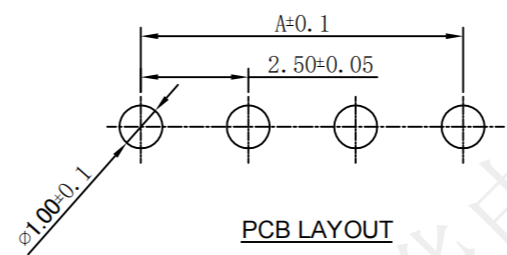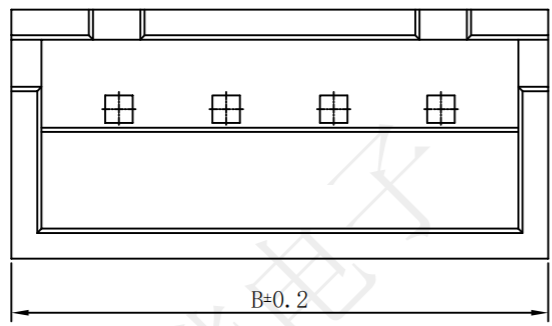

PIN数	料号	尺寸	
		A	B
2P	CZB15135	2.50	7.50
3P	CZB15136	5.00	10.00
4P	CZB15137	7.50	12.50
5P	CZB15138	10.00	15.00
6P	CZB15139	12.50	17.50
7P	CZB15140	15.00	20.00
8P	CZB15141	17.50	22.50
9P	CZB15142	20.00	25.00
10P	CZB15143	22.50	27.50
11P	CZB15144	25.00	30.00
12P	CZB15145	27.50	32.50
13P	CZB15146	30.00	35.00
14P	CZB15147	32.50	37.50
15P	CZB15148	35.00	40.00

**深圳市兴烨电子有限公司**  
 Shenzhen XingYe Electronics co., Ltd

Series Name :  
XH-nA

Product Name :

TOLERANCE		
.XX ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	x° ±1°	CHEd: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Part NO:

	SCALE	SHEET	REV.
	1:1	1/1	A1