

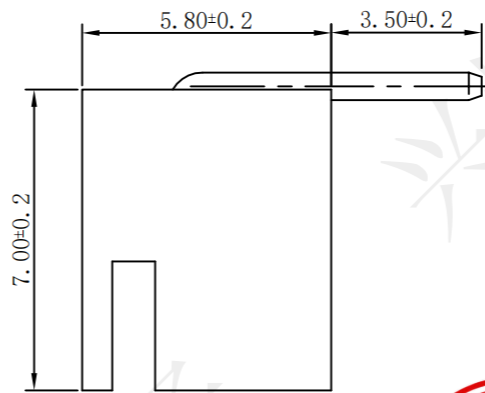
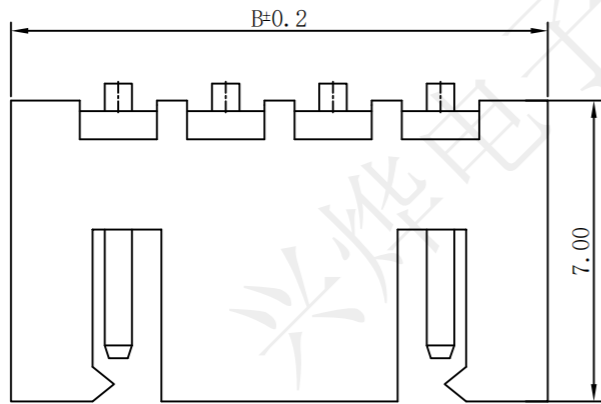


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

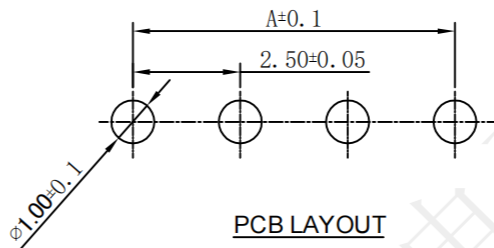

Operating temperature: -25°C~85°C
 Rated loading: 3A 250V AC, DC
 Contact resistance: 20mΩ Max
 Insulation resistance: 1000MΩ Min
 Withstanding voltage: AC 1000V (50HZ)/min
 Material: PA66
 PIN brass Tin-plated

受控文件

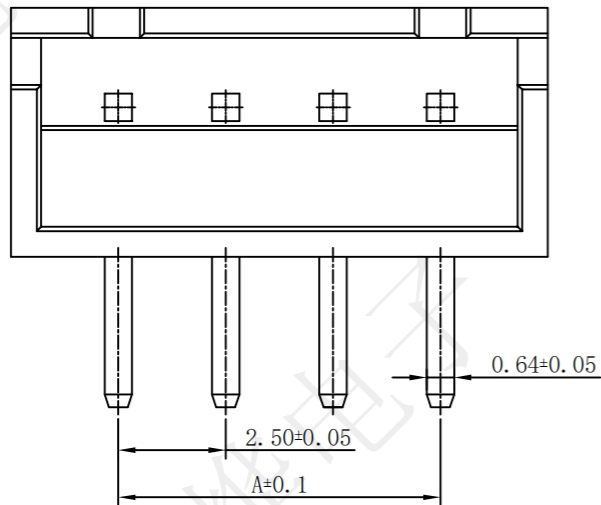

PIN数	料号	尺寸	
		A	B
2P	CZB15149	2.50	7.50
3P	CZB15150	5.00	10.00
4P	CZB15151	7.50	12.50
5P	CZB15152	10.00	15.00
6P	CZB15153	12.50	17.50
7P	CZB15154	15.00	20.00
8P	CZB15155	17.50	22.50
9P	CZB15156	20.00	25.00
10P	CZB15157	22.50	27.50
11P	CZB15158	25.00	30.00
12P	CZB15159	27.50	32.50
13P	CZB15160	30.00	35.00
14P	CZB15161	32.50	37.50
15P	CZB15162	35.00	40.00

深圳市兴烨电子有限公司
 Shenzhen XingYe Electronics co., Ltd

TOLERANCE		
.XX ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	x° ±1°	CHEd: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Series Name : XH-nAW
 Product Name :

Part NO:		
	SCALE	SHEET
	1:1	1/1
		REV.
		A1