
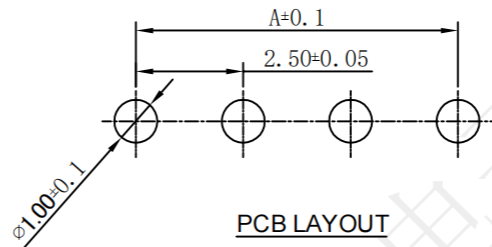
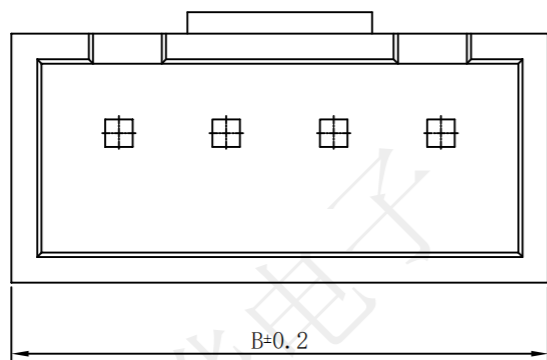
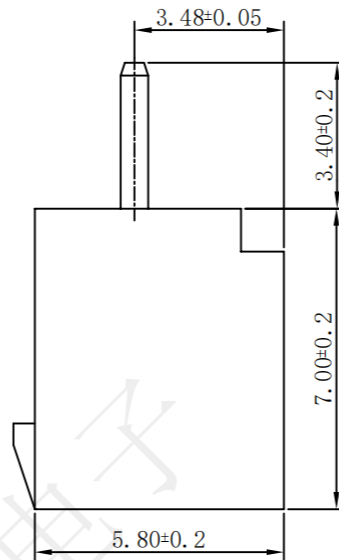


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

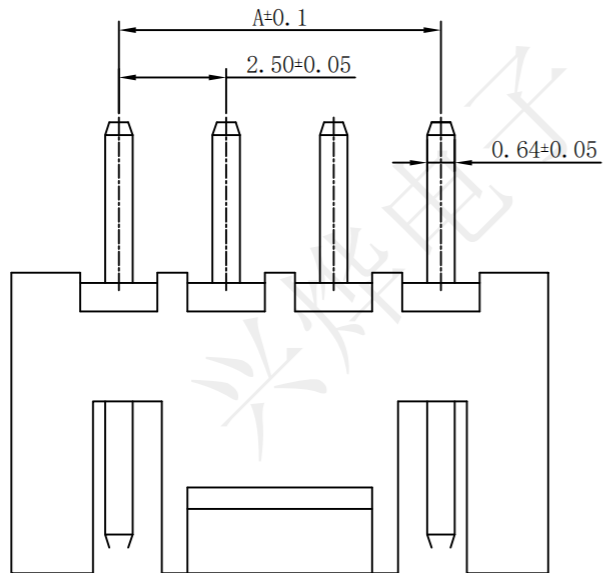

Operating temperature: -25°C~85°C  
 Rated loading: 3A 250V AC, DC  
 Contact resistance: 20mΩ Max  
 Insulation resistance: 1000MΩ Min  
 Withstanding voltage: AC 1000V (50HZ)/min  
 Material: PA66  
 PIN brass Tin-plated

**受控文件**

PIN数	料号	尺寸	
		A	B
2P	CZB15191	2.50	7.50
3P	CZB15192	5.00	10.00
4P	CZB15193	7.50	12.50
5P	CZB15194	10.00	15.00
6P	CZB15195	12.50	17.50
7P	CZB15196	15.00	20.00
8P	CZB15197	17.50	22.50
9P	CZB15198	20.00	25.00
10P	CZB15199	22.50	27.50
11P	CZB15200	25.00	30.00
12P	CZB15201	27.50	32.50
13P	CZB15202	30.00	35.00
14P	CZB15203	32.50	37.50
15P	CZB15204	35.00	40.00

**深圳市兴烨电子有限公司**  
 Shenzhen XingYe Electronics co., Ltd

Series Name :  
XH-nA带扣

Product Name :

TOLERANCE		
XX	±0.30	X.° ±2°
.XX	±0.20	x° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	

APPD: 陈爱光  
 CHED: 施立敏  
 DRAW: 马洪飞

Part NO:

	SCALE	SHEET	REV.
	1:1	1/1	A1