

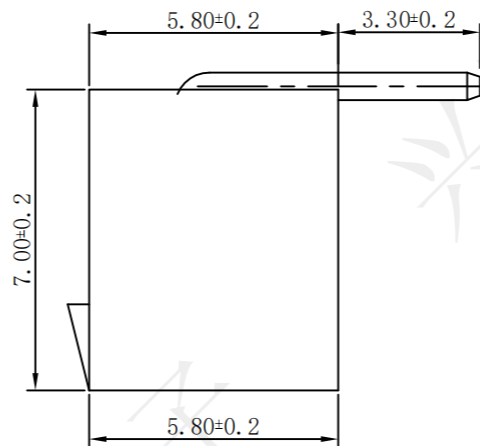
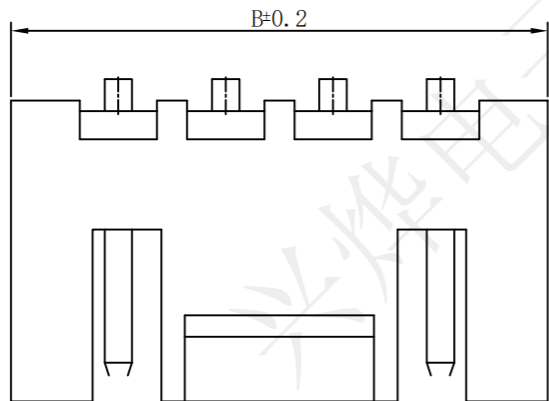


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

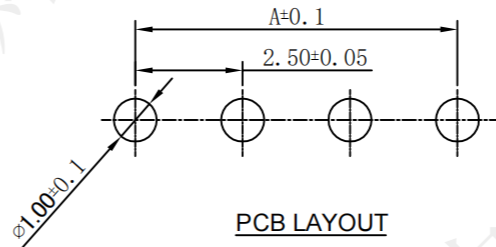

Operating temperature: -25°C~85°C
 Rated loading: 3A 250V AC, DC
 Contact resistance: 20mΩ Max
 Insulation resistance: 1000MΩ Min
 Withstanding voltage: AC 1000V (50HZ)/min
 Material: PA66
 PIN brass Tin-plated

受控文件

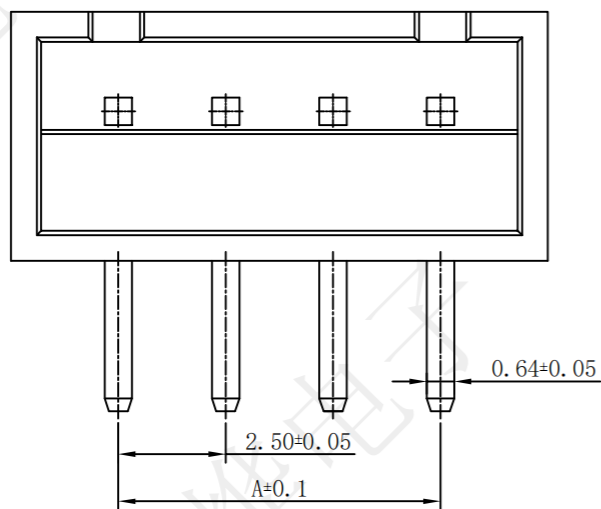

PIN数	料号	尺寸	
		A	B
2P	CZB15205	2.50	7.50
3P	CZB15206	5.00	10.00
4P	CZB15207	7.50	12.50
5P	CZB15208	10.00	15.00
6P	CZB15209	12.50	17.50
7P	CZB15210	15.00	20.00
8P	CZB15211	17.50	22.50
9P	CZB15212	20.00	25.00
10P	CZB15213	22.50	27.50
11P	CZB15214	25.00	30.00
12P	CZB15215	27.50	32.50
13P	CZB15216	30.00	35.00
14P	CZB15217	32.50	37.50
15P	CZB15218	35.00	40.00
16P	CZB15599	37.50	42.50

深圳市兴烨电子有限公司
 Shenzhen XingYe Electronics co., Ltd

TOLERANCE		
.XX ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	x° ±1°	CHEd: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Series Name :
XH-nAW带扣

Product Name :

Part NO:		
	SCALE	SHEET
	1:1	1/1
	REV.	A1