
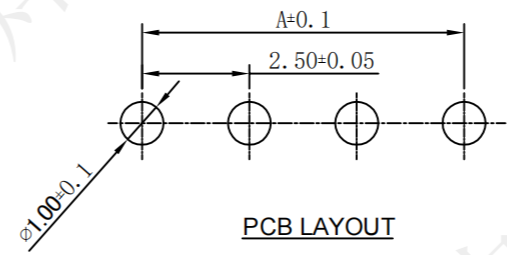
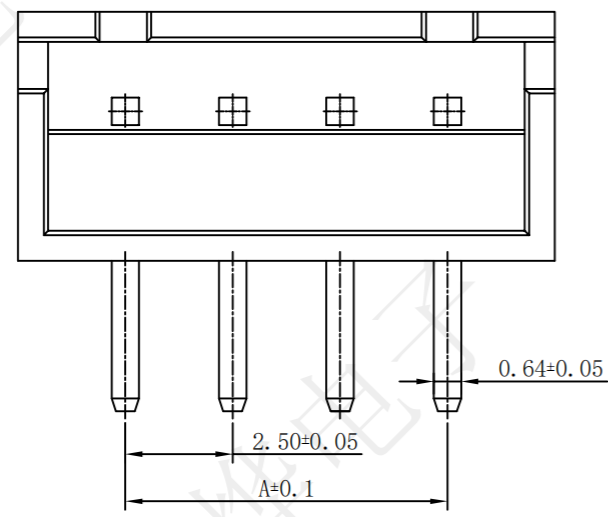
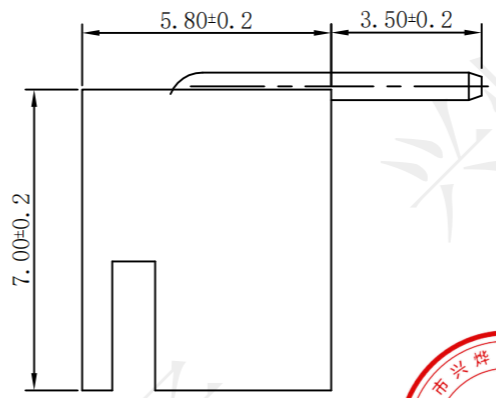


| REV. | ECN NO. | DESCRIPTION | DRAW | APPD. | DATE |
|------|---------|-------------|------|-------|------|
| A | --- | | | | |

受控文件

Operating temperature: -25℃~85℃
 Rated loading: 3A 250V AC, DC
 Contact resistance: 20mΩ Max
 Insulation resistance: 1000MΩ Min
 Withstanding voltage: AC 1000V (50HZ)/min
 Material: PA66 增强尼龙
 PIN brass Tin-plated

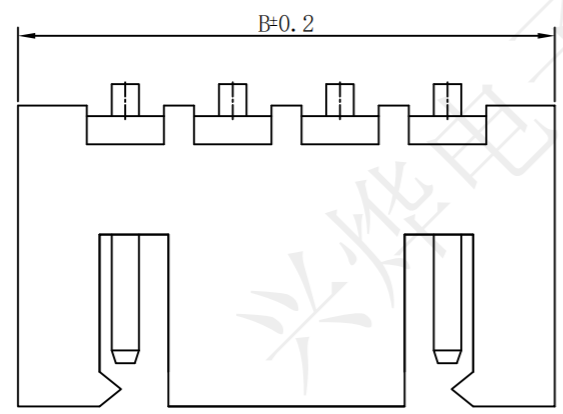

| PIN数 | 料号 | 尺寸 | |
|------|----------|-------|-------|
| | | A | B |
| 2P | CZB15177 | 2.50 | 7.50 |
| 3P | CZB15178 | 5.00 | 10.00 |
| 4P | CZB15179 | 7.50 | 12.50 |
| 5P | CZB15180 | 10.00 | 15.00 |
| 6P | CZB15181 | 12.50 | 17.50 |
| 7P | CZB15182 | 15.00 | 20.00 |
| 8P | CZB15183 | 17.50 | 22.50 |
| 9P | CZB15184 | 20.00 | 25.00 |
| 10P | CZB15185 | 22.50 | 27.50 |
| 11P | CZB15186 | 25.00 | 30.00 |
| 12P | CZB15187 | 27.50 | 32.50 |
| 13P | CZB15188 | 30.00 | 35.00 |
| 14P | CZB15189 | 32.50 | 37.50 |
| 15P | CZB15190 | 35.00 | 40.00 |

深圳市兴烨电子有限公司
 Shenzhen XingYe Electronics co., Ltd

| TOLERANCE | | |
|------------|------------|-----------|
| .XX ±0.30 | X.° ±2° | APPD: 陈爱光 |
| .XX ±0.20 | x° ±1° | CHEd: 施立敏 |
| .XXX ±0.10 | .XX° ±0.5° | DRAW: 马洪飞 |
| UNITS | mm | |

Series Name : XH-nAW米黄色耐温
 Product Name :

| | | |
|----------|-------|-------|
| Part NO: | | |
| | SCALE | SHEET |
| | 1:1 | 1/1 |
| | | REV. |
| | | A1 |