

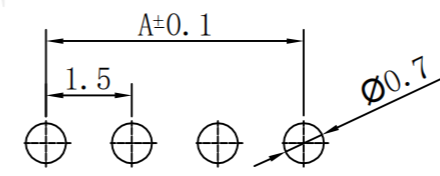


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

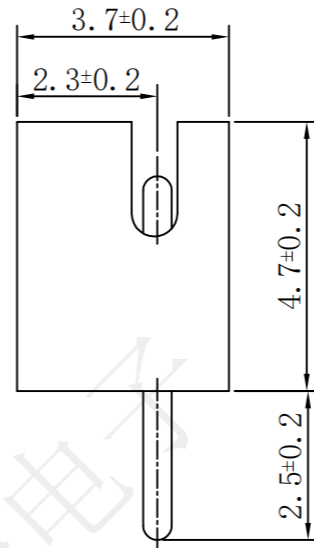


Operating temperature: -25 °C~85 °C
 Rated loading: 1A 100V AC,DC
 Contact resistance: 20mΩ Max
 Insulation resistance: 500MΩ Min
 Withstanding voltage: AC 500V (50HZ)/min
 Material: PA66
 PIN Brass Tin-plated

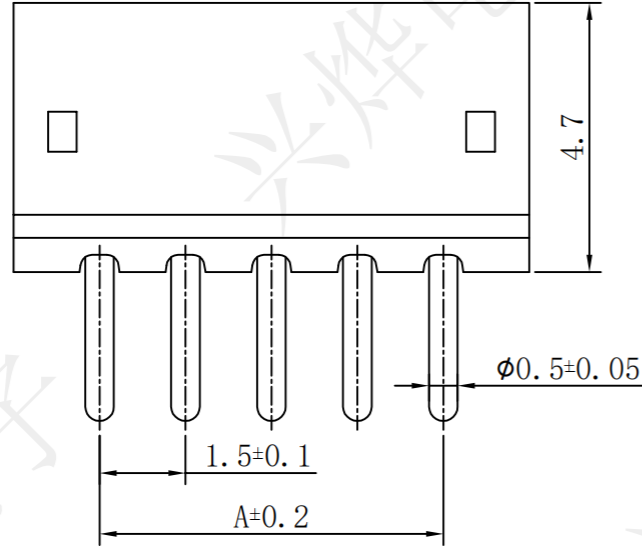

PCB LAYOUT

受控文件

PIN数	料号	尺寸	
		A	B
2P	CZB15248	1.50	4.50
3P	CZB15249	3.00	6.00
4P	CZB15250	4.50	7.50
5P	CZB15251	6.00	9.00
6P	CZB15252	7.50	10.50
7P	CZB15253	9.00	12.00
8P	CZB15254	10.50	13.50
9P	CZB15255	12.00	15.00
10P	CZB15256	13.50	16.50
11P	CZB15257	15.00	18.00
12P	CZB15258	16.50	19.50

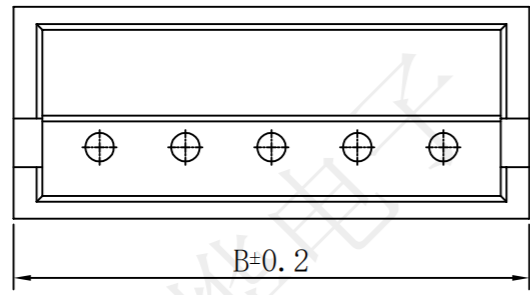

深圳市兴烨电子有限公司
 Shenzhen XingYe Electronics co., Ltd

TOLERANCE		
X.X ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	.X° ±1°	CHEd: 施立敏
.XXX ±0.10	XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Series Name :
1.5-nA米黄色

Product Name :

Part NO:		
	SCALE	SHEET
	1:1	1/1
		REV.
		A1