

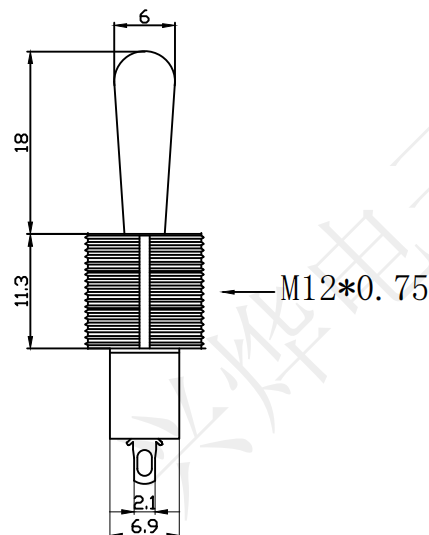

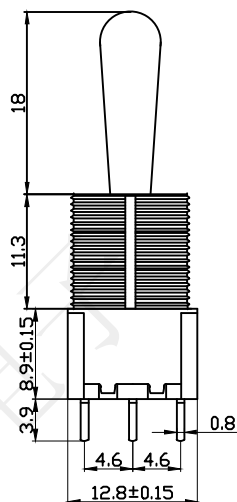


| REV. | ECN NO. | DESCRIPTION | DRAW | APPD. | DATE |
|------|---------|-------------|------|-------|------|
| A    | ---     |             |      |       |      |



### Specification:

- 1.Rating: AC250V 2A/AC120V 5A
- 2.Contact Resistance: 50mΩ Max
- 3.Insulation Resistance: 100MΩ Min
- 4.Withstand Voltage: AC1000V(50-60Hz) For 1 Minute
- 5.Operation Force: 350±150gf
- 6.Life Test: 10000Cycles
- 7.Circuit Function: ON-OFF-ON



Circuit Diagram



| ITEM | PART NAME       | MATERIAL        | COLOR | FINISHING      | REMARK |
|------|-----------------|-----------------|-------|----------------|--------|
| 1    | Handle          | Brass           |       | Plating Nickel |        |
| 2    | Rocker actuator | Brass           |       | Plating Nickel |        |
| 3    | Nut             | Brass           |       | Plating Nickel |        |
| 4    | Sliding axle    | PBT             | White |                |        |
| 5    | Contact         | Brass           |       | Plating Silver |        |
| 6    | Ring            | Brass           |       | Plating Nickel |        |
| 7    | Washer          | Stainless steel |       |                |        |
| 8    | Terminal        | Brass           |       | Plating Silver |        |
| 9    | Base            | PBT             | Red   |                |        |
| 10   | Shell           | Stainless steel |       |                |        |

受控文件

深圳市兴烨电子有限公司  
ShenZhen XingYe Electronics co., Ltd

| TOLERANCE |       |
|-----------|-------|
| XX        | ±0.30 |
| .XX       | ±0.20 |
| .XXX      | ±0.10 |
| UNITS     | mm    |

APPD: 陈爱光  
CHED: 施立敏  
DRAW: 马洪飞

Series Name :  
Product Description :  
T004-M12-102钮子开关  
Part NO: AKK20021



| SCALE | SHEET | REV. |
|-------|-------|------|
| 1:1   | 1/1   | A1   |